



**INTERNATIONAL CIVIL AVIATION ORGANIZATION**

**REPORT OF THE SECOND MEETING OF  
THE MIDANPIRG INTERNET PROTOCOL SUITE  
WORKING GROUP**

**IPS WG/2**

*(Cairo, 11 –12 October 2009)*

The views expressed in this Report should be taken as those of the MIDANPIRG Internet Protocol Suite Working Group and not of the Organization. This Report will, however, be submitted to the MIDANPIRG and any formal action taken will be included in the Report of the MIDANPIRG.

Approved by the Meeting

The designations employed and the presentation of material in this publication do not imply the expression of any opinion whatsoever on the part of ICAO concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontier or boundaries.

**TABLE OF CONTENTS**

<b>PART I - HISTORY OF THE MEETING</b>		<b>Page</b>
1.	Place and Duration .....	1
2.	Opening .....	1
3.	Attendance.....	1
4.	Officers and Secretariat .....	1
5.	Language .....	1
6.	Agenda.....	2
7.	Conclusions and Decisions – Definition .....	2
8.	List of Draft Conclusions and Decisions.....	2

**PART II - REPORT ON AGENDA ITEMS**

Report on Agenda Item 1 .....	1-1
Report on Agenda Item 2 .....	2-1/2-2
Appendices 2A	
Report on Agenda Item 3.....	3-1/3-2
Appendices 3A- 3F	
Report on Agenda Item 4 .....	4-1/4-6
Appendices 4A – 4B	
Report on Agenda Item 5 .....	5-1
Appendices 5A – 5D	
Report on Agenda Item 6 .....	6-1

**ATTACHMENT A**

List of Participants.....	1-4
---------------------------	-----

IPS WG/2  
History of the Meeting

---

## **PART I - HISTORY OF THE MEETING**

### **1. PLACE AND DURATION**

1.1 The Second Meeting of the MIDANPIRG Internet Protocol Suite Working Group (IPS WG/2) was held at ICAO Middle East Regional Office, Cairo, 11-12 October 2009.

### **2. OPENING**

2.1 On behalf of Regional Director Mr. Mohammed Khonji, the meeting was opened by Raza Gulam regional Officer Communication Navigation and Surveillance, who welcomed all the delegates to ICAO MID Regional Office, Mr. Gulam highlighted the topic of the meeting mainly the Regional ATN plan and in particular the planning concerning the AMHS since many States already installed the AMHS system and not utilizing the full advantages of the systems because of the lack of the ATS Messaging Management Centre for address coordination in the MID Region. Mr. Gulam informed the meeting of the arrangement between ICAO and EUROCONTROL on the use of the European AMC for all States in the near to medium terms, also informed the meeting that the AMC training is planned to be conducted just after the meeting and therefore it was good chance to correlate both events back –to- back for the benefits of the States also highlighted that after the training the States should benefit from the new system and this meeting is the chance to complete the AMHS part of the ATN plan. Mr. Gulam also indicated that communication technology is advancing at an extremely rapid rate, as new products and services are constantly being offered to the public with unprecedented capabilities, performance and capacity with at ever decreasing costs and the aviation should benefit from this technologies and the IPS WG has responsibility to help the region implement the supporting that brings advantages to the all aviation community. Finally Mr. Gulam wished the meeting fruitful results.

### **3. ATTENDANCE**

3.1 The meeting was attended by a total of twenty two (22) participants, which included delegates from eight (8) States and (1) Organisation. The list of participants is as at **Attachment A** to the Report.

### **4. OFFICERS AND SECRETARIAT**

4.1 The Rapporteur of the meeting was Mr. Mohamed Ali Saleh, Head of Aeronautical Communication, Civil Aviation Affairs, from Bahrain Mr. Raza Ali Gulam, Regional Officer, Communications Navigation and Surveillance (CNS) from the ICAO Middle East Cairo Office, acted as the Secretary of the meeting.

### **5. LANGUAGE**

5.1 The discussions were conducted in English. Documentation was issued in English.

### **6. AGENDA**

6.1 The following Agenda was adopted:

Agenda Item 1: Adoption of the Provisional Agenda

IPS WG/2  
History of the Meeting

---

- Agenda Item 2: Follow-up on MIDANPIRG/11 and IPS WG/1 Conclusions and Decisions relevant to IPS WG TOR
- Agenda Item 3: Development of Regional ATN plans
- Agenda Item 4: Public Internet usage issues
- Agenda Item 5: Future Work Programme
- Agenda Item 6: Any other business

**7. CONCLUSIONS AND DECISIONS – DEFINITION**

7.1 The Sub-Group records its actions in the form of Draft Conclusions and Draft Decisions for further action and adoption by the MIDANPIRG as its Conclusions and Decisions with the following significance:

- a) **Conclusions** deal with matters which, in accordance with the Group's terms of reference, merit directly the attention of States on which further action will be initiated by ICAO in accordance with established procedures; and
- b) **Decisions** deal with matters of concern only to the MIDANPIRG and its contributory bodies.

7.2 In the same context, the Sub-Group can record its actions in the form of Conclusions and Decisions where no further action is required by the MIDANPIRG or already authorized by MIDANPIRG.

**8. LIST OF DRAFT CONCLUSIONS AND DECISIONS**

- DRAFT CONCLUSION 2/1: MID ATN COMPATIBILITIES
- DRAFT DECISION 2/2: MID REGION ATN PLANNING AND IMPLEMENTATION DOCUMENT
- DRAFT CONCLUSION 2/3: PROPOSAL FOR AMENDMENT TO CNS PART OF MID FASID
- DRAFT CONCLUSION 2/4: DIGITAL HIGH SPEED LINKS
- DRAFT CONCLUSION 2/5: REGISTRATION TO AMC
- DRAFT CONCLUSION 2/6: USE OF PUBLIC INTERNET IN MID REGION
- DRAFT DECISION 2/7: TERMS OF REFERENCE OF THE IPS WORKING GROUP

-----

**PART II: REPORT ON AGENDA ITEMS**

**REPORT ON AGENDA ITEM 1: ADOPTION OF THE PROVISIONAL AGENDA**

1.1 The meeting reviewed and adopted the provisional agenda as at paragraph 6 of the history of the meeting.

-----

IPS WG/2  
Report on Agenda Item 2

---

**REPORT ON AGENDA ITEM 2: FOLLOW-UP ON MIDANPIRG/11 AND IPS WG/1 CONCLUSIONS AND DECISIONS RELEVANT TO IPS WG TOR**

2.1 The meeting noted that that IPS WG/1 held in Cairo, Egypt on 11 and 12 May 2009 reviewed the MIDANIRG/11 meeting conclusions and decisions related to the IPS WG furthermore IPS WG/1 developed 5 Conclusions and 2 decisions which were thoroughly reviewed by the meeting.

2.2 The meeting was provided with the information and back ground on the development of the IP Suite of Protocols were, the Air Navigation Commission merged the Aeronautical Mobile Communication Panel (AMCP) and the Aeronautical Telecommunication Network Panel into the Aeronautical Communications Panel (ACP). At AMCP/8 (2003) proposals for working arrangements and task related to the Aeronautical Telecommunication Network (ATN) to be undertaken by ACP were developed. The commission agreed, in response to these proposals to request ACP to “consider the use of TCP/IP protocols in certain geographical areas and its use in the ATN”. The ACP undertook this task and reported in 2005 at the first meeting of the ACP Working Group of the Whole meeting (WGW/01) the feasibility of using TCP/IP protocols (or the Internet Protocol Suite (IPS).

2.3 The meeting noted that Amendment 83 affected Volumes 1 and 3 of Annex 10 stemmed from the work undertaken in the various ICAO Panels, and this Amendment is applicable as of 20 November 2008. The Amendment, among other issues, introduced Internet Protocol Suite (IPS) technology to the Aeronautical Telecommunication Network (ATN).

2.4 The meeting noted that Manual for the ATN using IPS Standards and Protocols (Doc 9896) had been approved by the ICAO Secretary General and submitted for publication. An unedited advance version of the Manual can be downloaded at <http://www.icao.int/anb/panels/acp> and has been published at ICAO-NET website.

2.5 Concerning Conclusion 1/1 of the IPS WG/1 the meeting was of the view that MID states has to be very careful when performing any upgrades to links and systems and to take care of maintaining the necessary compatibilities, furthermore the meeting agreed that a periodic update is to be sent to the ICAO MID Regional office. Consequently agreed to replace the draft Conclusion 1/1 of the IPS WG/1 with the following updated Conclusion:

***DRAFT CONCLUSION 2/1: MID ATN COMPATIBILITIES***

*That,*

- a) MID ATN will be IPS based and will maintain compatibility with AFTN, CIDIN and ISO/OSI based implementation and in close coordination with adjacent Region;*
- b) phase out of any protocol will be based in close coordination within MID Region and with the adjacent Region; and*
- c) MID States to provide periodic update to the ICAO MID Regional Office every six month.*

2.6 The meeting noted that MIDANPIRG/11 meetings was of the same view of the ACP regarding the future path of ground-ground messaging systems; where among others, one to consider relevant developments, for example the System Wide Information Management (SWIM), where it was agreed that IPS WG member within the States for the project, the meeting noted that no single feedback was received, however the meeting agreed to discuss the MID IP Network under Agenda Item 3, where working papers on the subject is submitted to the meeting.

IPS WG/2  
Report on Agenda Item 2

---

2.7 As regard to task for review of the rationalized AFTN plan the meeting agreed that the current Rationalized AFTN plan as published in the MID FASID is considered adequate for the time being until the new IP network is put in place, with regard to COM center classification ICAO Doc 8259 is detailing the criteria on which the com centers are classified, furthermore the meeting agreed that through review will be considered by the members upon return and comments for the revision or establishment of Regional Criteria will be proposed within 10 days and provided to the secretariat and if no comment received then the Regional criteria classification will be considered as not necessary.

2.8 The meeting reviewed and updated the status of relevant MIDANPIRG/11 and IPS WG/1 Conclusions and Decisions, **Appendix 2A** to the Report on Agenda Item 2.

-----

IPS WG/2  
Appendix 2A to the Report on Agenda Item 2

CONCLUSION/DECISION	FOLLOW-UP ACTION	TO BE INITIATED BY	DELIVERABLE	TARGET DATE	REMARKS
<p>DRAFT CONC. 1/1: MID ATN COMPATIBILITIES</p> <p>That,</p> <p>a) MID ATN will be IPS based and will maintain compatibility with AFTN, CIDIN and ISO/OSI based implementation and in close coordination with adjacent Region; and</p> <p>b) phase out of any protocol will be based in close coordination within MID Region and with the adjacent Region.</p>	<p>State to advise if any changes</p>	<p>State</p>	<p>Compatible ATN Network</p>	<p>On going</p>	<p>On going</p>
<p>DRAFT CONC. 1/2: AMHS ADDRESS COORDINATION IN MID REGION</p> <p>That MID States,</p> <p>a) use the EUROCONTROL AMC and follow the procedures as outlined in SL 7/49.1-09/34;</p> <p>b) operating international Communication centre, with the intention of implementing AMHS should engage into the AMHS address coordination process without delay ;and</p> <p>c) support ICAO MID regional Office by attending the AMC training which will be organized for the MID Region.</p>	<p>States to follow the procedure</p> <p>States</p> <p>ICAO MID Office</p>	<p>States</p> <p>States</p> <p>ICAO MID Office and states</p>	<p>Follow-up of the procedure</p> <p>Engagement with AMC operations</p> <p>State letter Host and nominate experts</p>	<p>On going for short term</p> <p>On going</p> <p>Jun 09</p>	<p>Completed States already have users follow up with rest of States</p> <p>Completed</p>

CONCLUSION/DECISION	FOLLOW-UP ACTION	TO BE INITIATED BY	DELIVERABLE	TARGET DATE	REMARKS
<p>DRAFT CONC. 1/3: REGISTRATION TO AMC</p> <p>That,</p> <p>a) ICAO MID Regional Office communicates the procedure developed by IPS WG to the concerned in ICAO HQ and EUROCONTROL for the modification of the registration procedure as outlined in <b>Appendix 4B</b> to the report on Agenda Item 4.</p> <p>b) MID States designate three users to AMC and send their details to ICAO MID Regional Office as soon as possible.</p>	<p>ICAO MID Office communication</p> <p>States designate users</p>	<p>ICAO MID Office</p> <p>States</p>	<p>Result of coordination</p> <p>Registration in AMC</p>	<p>Aug 09</p> <p>Aug 09</p>	<p>States already have users follow up with rest of States</p>
<p>DRAFT CONC.1/4: POSTING OF AMHS PLANS IN AMC</p> <p>That MID States, are encouraged to post their AMHS implementation plans in the AMC.</p>	<p>State letter and States posting</p>	<p>ICAO MID Office States</p>	<p>State letter Posting of the plan</p>	<p>Jun 09 Sep 09</p>	<p>On going</p>
<p>DRAFT DEC. 1/5: MID REGION ATN PLANNING AND IMPLEMENTATION DOCUMENT</p> <p>That, MID ATN Planning document to be amended as at <b>Appendix 4C</b> to the report on Agenda Item 4 and renamed “ MID Region ATN planning and Implementation Document” and IPS WG completes its development.</p>	<p>Amendment of MID ATN document State letter</p>	<p>IPS WG ICAO MID Office States</p>	<p>Amended document State letter Comments from State</p>	<p>Jun 09 Sep 09</p>	<p>On going new version developed</p>

CONCLUSION/DECISION	FOLLOW-UP ACTION	TO BE INITIATED BY	DELIVERABLE	TARGET DATE	REMARKS
<p>DRAFT CONC. 1/6: USE OF PUBLIC INTERNET IN MID REGION</p> <p>That MID States,</p> <p>a) are encouraged to follow the guidance <b>Appendix 4D</b> to the report on Agenda Item 4, when using the public internet for critical aeronautical communication; and</p> <p>b) urgently provide the inventory on the public internet usage in their state to the ICAO MID office.</p>	<p>State letter</p> <p>State replies</p>	<p>ICAO MID Office</p> <p>State</p>	<p>State letter with survey and the guidance</p> <p>State reply and comments and inventory</p>	<p>Jun 09</p> <p>Sep 09</p>	<p>Completed</p>
<p>DRAFT DEC. 1/7: TERMS OF REFERENCE OF THE IPS WORKING GROUP</p> <p>That, the Terms of Reference and Work Programme of the IPS Working Group be updated as at Appendix 5A to the Report of Agenda Item 5.</p>	<p>Follow up of the work programme</p>	<p>IPS WG</p>	<p>IPS WG report</p>	<p>Oct 09</p>	<p>Updated TOR under new decision</p>

-----

IPS WG/2  
Report on Agenda Item 3

---

**REPORT ON AGENDA ITEM 3: DEVELOPMENT OF REGIONAL ATN PLANS**

3.1 The meeting noted that the goal of ICAO that an IPS based ATN to be implemented on a global basis, where achieving this goal, careful attention has to be given to the current implementations of AFTN, CIDIN and ISO/OSI based ATN. Hence provisions for continuation of CIDIN, AFTN and ISO/OSI are being developed/supported to secure the implementation of the ATN that will take place gradually on the basis of regionally agreed requirements.

3.2 The meeting recalled MIDANPIRG/10 and MIDANPIRG/11 directives, that MID ATN network will be IPS based ATN being easy expandable (scalable), more reliable, easier interconnection, flexible, de facto industry standard, IPS standards open and freely available and that a large variety of equipment and software of the shelf available and at low cost.

3.3 In this context the meeting agreed that MID ATN network will be catering for the System Wide Information Management (SWIM), where SWIM will enable increased common situational awareness and deliver the right information to the right place at the right time.

3.4 The meeting also recalled ICAO Forum on Integration and Harmonization of NextGen (Next Generation) and SESAR (the Single European Sky ATM Research Programme) into the Global ATM Framework which was held in Montreal from 8 to 10 September 2008.

3.5 The meeting recalled that the forum goal was to facilitate understanding of the integration and harmonization of NextGen and SESAR, the two major ATM programmes initiated by the United States and Europe, respectively, to meet the specific requirements of these regions. Global harmonization was emphasized and to be within the context of a global ATM system to ensure interoperability, to maximize utilization of available and emerging technologies.

3.6 The meeting noted that both the SESAR and NextGen programmes are well underway along with improvements planned by other States; the forum highlighted, the importance for the harmonization of the global air traffic management system, all are consistent with the ICAO Global Air Navigation Plan.

3.7 The meeting noted that ICAO has already provided the framework in the form of the Global Air Traffic Management Operational Concept and the Global Air Navigation Plan, ICAO is playing its part to enable the implementation of the future programmes with timely development of the necessary SARPs.

3.8 Considering the above, the meeting was apprised that MIDANPIRG/11 established IPS Working Group to facilitate the implementation of ATN in the MID Region, also defined the Terms of Reference and Work Programme of the IPS Working Group.

3.9 The meeting noted that Annex 10 chapter 3 para 3.3.3 States “Requirements for use of the ATN shall be made on the basis of regional air navigation agreements”. and para 3.3.4 *Recommendation.— Civil aviation authorities should co-ordinate, with national authorities and aeronautical industry, those implementation aspects of the ATN which will permit its world-wide safety, interoperability and efficient use, as appropriate.*

IPS WG/2  
Report on Agenda Item 3

---

3.10 The meeting was further updated on the various supporting documents available that for supporting the work programme of the IPS working group which include:

- Annex 10, Vol. III, Chapter 3, General description of the AMHS system and the ATSMHS service; including Amendment 83 to Annex 10 – *Aeronautical Telecommunications*, Vol. III, Parts I and III, applicable on 20 November 2008, introduces the Internet Protocol Suite (IPS) technology in ATN;
- Doc 9705 – Manual of Technical Provisions for the Aeronautical Telecommunication Network;
  - Doc 9739 – Comprehensive Aeronautical Telecommunication Network Manual;
  - Doc 9880 – Manual on Detailed Technical Specifications of the ATN/OSI; and
  - Doc 9896 – Manual for the ATN using IPS standards and protocols.

3.11 The meeting noted that the ATN activities have been on going in the MID Region for some years. In this regard, ATN planning document was first developed by the AFS/ATN TF, however it was not completed, consequently IPS WG/1 continued on this work and developed more comprehensive version and renamed the document as “MID REGIONAL ATN PLANNING AND IMPLEMENTATION DOCUMENT”.

3.12 The meeting noted that in order to complete the MID-Regional ATN Planning & Implementation document, many parts need to be developed and mainly the AMHS portion and since European ATS Messaging Management Centre (AMC) will be used globally according to ICAO recommendations as in State letter AN 7/49.1-09/34, consequently the meeting agreed that the MID Region adopt the same ICAO EUR Region AMHS documents and consequently made reference to them in the modified version of the MID Regional ATN Planning and Implementation Document.

3.13 Based on the above, the meeting had through review of the “MID REGIONAL ATN PLANNING AND IMPLEMENTATION DOCUMENT” paying particular attention to the Back bone router tables and the AMHS part of the document and developed the version 1.0 of the “MID REGIONAL ATN PLANNING AND IMPLEMENTATION DOCUMENT” as at **Appendix 3A** to the Report on Agenda Item 3, which is to be presented to the CNS SG for approval and final adoption by MIDANPIRG/12 and agreed on the following Draft Conclusion to replace and supersede conclusion 1/5 of the IPS WG/1.

***DRAFT DECISION 2/2: MID REGION ATN PLANNING AND IMPLEMENTATION DOCUMENT***

*That, MID ATN Planning document be amended as at **Appendix 3A** to the report on Agenda Item 3 and renamed “MID Region ATN planning and Implementation Document, and that it is the IPS WG complete its development.*

3.14 The meeting reviewed the MID ANP FASID (Doc 9708) specially the CNS section part IV, paying attention to the AFTN and ATN part and the agreed that connectivity data for AFTN/CIDIN/AMHS, On-Line Data Interchange (OLDI), which is functionally equivalent to Air Traffic Services (ATS) Inter-Facility Data Communication (AIDC), and ATS direct speech in the ICAO MID Region needs to be updated in MID FASID, and consequently member States reviewed and provided the necessary update to be included in the FASID as at **Appendix 3B** to the report on

IPS WG/2  
Report on Agenda Item 3

---

Agenda Item 3, which will enable the ICAO MID Regional Office to prepare the appropriate amendment proposal for circulation and necessary approvals and agreed to the to the following Draft Conclusion:

***DRAFT CONCLUSION 2/3:                      PROPOSAL FOR AMENDMENT TO CNS PART OF MID FASID***

*That, a proposal for Amendment as contained in **Appendices 3B**, be issued according to established procedures to reflect updates to part IV of MID FASID.*

3.15            The meeting further modified the layout of the CNS 1C table to include the bandwidth of the circuit as supplied by the telecom operator to the Civil Aviation, the actual signaling speed at which the application is running, and to include the Internet protocol IP in the FASID to cater for the new developments. Furthermore the meeting noted that many circuits are operational and not being recorded, therefore agreed to include these circuits in the list of operational circuits and agreed that in case of removal or malfunction of any of these circuits it will be considered as deficiency by the State.

3.16            The meeting was apprised that Islamic Republic of Iran in support of ATN implementation has upgraded the backbone circuits as follows:

- TEHRAN KARACHI circuit has improved up to 64k
- TEHRAN ANKARA circuit is improving up to 64k
- TEHRAN KUWAIT circuit has improved up to 64k-
- TEHRAN BAHRAIN circuit has improved up to 64k-
- TEHRAN DAMASCUS is improving up to 64k
- TEHRAN BAGHDAD is improving up to 64k-

3.17            The meeting reiterated the need for keeping the pace for upgrading the circuits within the region and Interregional with high speed digital circuits in order to facilitate the ATN implementation and agreed to the following Draft Conclusion:

***DRAFT CONCLUSION 2/4:                      DIGITAL HIGH SPEED LINKS***

*That, in support of ATN implementation, MID States are urged to continue with the implementation of digital high speed links.*

3.18            With regard to Iran request to consider these new circuits as interregional it was explained that agreement on interregional circuits is defined during RAN meetings and that for the MID Region it was agreed during the LIM MID RAN (1996) meeting, furthermore the view of Europe and APAC region is necessary for accepting as Interregional circuits since it involve routing changes in the corresponding region, and the views of the Europe region was that the current architecture is sufficient enough compared to the MID Region traffic, where EUR/NAT Routing directory defined in part IV, Athena and Nicosia as gateways between Europe and MID. However it was elucidated that bilaterally agreed circuits could exits.

3.19            Furthermore the meeting was of the view that periodical connectivity data collection and publication in the MID ANP FASID was a human resource extensive task and would need to be supported by electronic tools, e.g. centralized database. In this context the meeting was made aware that AFTN/CIDIN/AMHS international connectivity information was maintained in ICAO EUR by

IPS WG/2  
Report on Agenda Item 3

---

EUROCONTROL in the AMC, and phase II functionality will be added for producing a report in a specified tabular form, appropriate for publication in the EUR FASID, the same procedure could be implemented in MID Region in the future.

3.20 The meeting noted that IPS WG/1 agreed that means and ways to be explored for the introduction of such tool in the MID Region. However, the meeting noted that no suggestions were received and consequently agreed that this is to be part of the future work programme of the IPS working group as its members are technology experts.

3.21 The meeting was informed about the electronic Air Navigation Plan (e-ANP) which will enable the central databases required. Accordingly, the meeting agreed that, the MID Region should benefit from this development and agreed that focal points be assigned in the MID States to provide and update all necessary information of the MID ANP FASID Part IV and to start with the ATN detail update, as and when the e-ANP becomes ready for operation.

3.22 The meeting noted that as per ICAO State letter AN 7/49.1-09/34, ICAO will utilize the European ATS Messaging Management Centre (AMC), provided by EUROCONTROL, to coordinate the allocation and management of AMHS addresses, furthermore to use the AMC it is necessary for the users to be trained before they are actually allowed to enter data in the AMC (<http://www.eurocontrol.int/amc>), consequently the meeting was apprised that ICAO MID Regional Office arrange for a training session for the MID States at ICAO Regional Office from 13-15 October 2009.

3.23 The meeting noted that IPS WG/1 updated the registration procedure which is at **Appendix 3C** to the report on Agenda Item 3, for the access to the AMC which was agreed with EUROCONTROL, and was circulated to all regions to apply this developed procedure as it facilitates the work for the regional office and the EUROCONTROL administrator.

3.24 The meeting noted that ICAO MID Regional office circulated to all MID States in State letter AN 7/5.1 – 09/245 dated 27 July 2009, only few MID States registered, consequently the meeting updated list of users of the AMC as at **Appendix 3D** to the report on Agenda Item 3 and agreed that other States who didn't designate users to do so as soon as possible and agreed to the following Draft Conclusion:

***DRAFT CONCLUSION 2/5:                      REGISTRATION TO AMC***

*MID States designate three users to AMC and send their details to ICAO MID Regional Office as soon as possible using the format as at **Appendix 3E** to the report on Agenda Item 3.*

3.25 The meeting noted that Egypt upgrades most of the international links to digital links of speed 64 KB and uses routers with Jeddah, Amman, Athens and Riyadh towards ATN. Egypt also finalized the installation of the most advanced system in AMHS, the system also has the capabilities for acting as a gateway between the existing AFTN system and the newly delivered servers for AMHS handling system.

3.26 The meeting noted that Egypt is ready to do the AMHS test with both Jeddah and Amman, specially with Jeddah since both States has the same systems and it is planned to complete the testing between Cairo and Jeddah in January 2010, however concerning the Amman-Cairo test

IPS WG/2  
Report on Agenda Item 3

---

the meeting agreed that both State coordinate as soon as possible and arrange for a model procedure for adoption by the Region (November 2009).

3.27 The meeting noted that Jordan implemented a new AFTN / AMHS switch at the end of the last year. The new system is in operation since 04-12-2008. It connects the COM Centre in Amman with the COM Centers in Cairo, Jeddah and Benguryon by means of AFTN lines. Furthermore, the Amman COM Centre is ready to establish connections with those other COM Centers for which direct connections with Amman are foreseen in the Regional AFTN Plan. However, the meeting noted that Jordan have been trying to coordinate with some centers according to the Regional AFTN Plan but without any positive response. Consequently the meeting agreed that MID States need to coordinate more closely and could contact ICAO MID Regional Office for supporting any coordination issues.

3.28 The meeting was of the view that, existing X25 based data networking has become obsolete and is no longer supported by some suppliers. States and their Air Navigation Service Providers (ANSP) will therefore be obliged to migrate their national networks and associated international connectivity to IP for both economic and service support reasons.

3.29 The meeting noted that in Europe a Pan European Network (PEN) has been initiated by EUROCONTROL. PEN will be implemented in Europe to meet the ATM requirements for a cost-effective, international communications network with the ability to support existing as well as future services. In its initial form, PEN is planned as a ground-ground IP network serving data communications between ANSPs and between ANSPs and EUROCONTROL. The meeting further noted that voice services will be integrated when the relevant SARPS are developed in the ACP.

3.30 The meeting further noted that PEN access points distributed over Europe and some neighboring States, some of which are in the MID Region, and that the most important purpose of the PEN project is to rationalize on the two existing backbones for Central Flow Management Unit (CFMU) and European AIS Database (EAD), and to set up an IP backbone service for all European ANSP's so that a single common IP backbone can serve current and future ANSP's communication needs.

3.31 The meeting was of the view that interoperability between ANSP systems is becoming more and more important, since the adoption of Flight Management Transfer Protocol (FMTP) in place of OLDI. FMTP aligns with the use of Internet Protocols (IP) as the industry standard for data exchange. This approach will extend to apply to other ANSP data, such as messaging and radar.

3.32 The meeting noted that there is no central application in MID Region like in Europe, however, the bi-lateral communications between neighbouring MID States are indeed very similar to Europe [Flight plan, OLDI, ATC Ground-Ground (G-G) voice].

3.33 The meeting further noted that some MID States have opted for integrated IP based national network. Sharing this experience will be of benefit to the region, mainly if the MID Region consider the possibility of establishing a common MID IP Network for which specification will have to be developed, in this regard the meeting recalled that during IPS WG all participating States provided updates to the network in their States where it was noted that Bahrain Saudi Arabia and Iran had already implemented domestic IP networks and the rest of the states are following the same path. In this regard the meeting agreed that MID States fill the IP Survey as at **Appendix 3F** to the report on agenda item 3 and send back to ICAO MID ICAO Regional Office.

IPS WG/2  
Report on Agenda Item 3

---

3.34 The meeting had lengthy discussion on the common IP Based specifications and networks and was of the views that evaluating the cost-benefits of a progressive IP network implementation across the MID Region and evaluating the technical feasibility of the concept is important to progress further, where the meeting recalled the MID VSAT network where all cost benefit and technical feasibility was done, however the MID Region didn't pursued the project. However the following members (Mona "Jordan", Abdulla "Saudi Arabia", Mahmoud "Egypt", Bageri "Iran", Ola "Syria", Mohammed "Bahrain") agreed voluntarily to provide the necessary technical and cost of circuits detail to SITA copying the ICAO MID Office, so as to prepare and submit the cost benefit analysis and technical feasibility study to the next IPS WG meeting for further study.

-----

APPENDIX 3A



MID REGIONAL ATN PLANNING AND  
IMPLEMENTATION DOCUMENT

Document Reference:	MIDANPIRG IPS/ WG
Author:	ATN Planning and IPS WG
Revision Number:	Draft Version 01 / 2009
Date:	Oct ober 2009

## EXECUTIVE SUMMARY

This transition plan provides technical guidance on the transition from the ground infrastructure support of the Aeronautical Fixed Telecommunication Network (AFTN) and the Common ICAO Data Interchange Network (CIDIN) services to the Aeronautical Telecommunication Network (ATN) for the Middle East Region.

The Middle East ATN Ground Transition Plan outlines the requirements to increase bandwidth and upgrade protocols for those trunks that will support the main data flow of traffic through the Middle East Region. The plan also provides target dates in which these trunks and implementation of BBISs and BISs will need to occur to ensure a smooth transition of the ATN within the region, taking into account proper interface with adjacent regions.

This document explain the plan on the ATN ground transition activities applicable to the Middle East Region. The ATN Transition Plan includes information about the implementation of Regional ATN Routing Architecture as presented in this document and development of naming and addressing plan.

This document is also updated with other ATN related material useful for the ATN implementation such as

- MID ATN IP based Strategy
- MID AMHS implementation
- MID AMHS testing
- 

This document is live document which will keep developing and other parts will be added to the document also will be amended as and when deemed necessary as appropriate upon approval of the appropriate MIDANPIRG subsidiary bodies. In that respect comments from States will be appreciated and could be addressed through the appropriate MIDANPIRG subsidiary body.

Any references to this manual should be interpreted as also referring to Annex 10 and misinterpretation Annex 10 and the relevant ICAO documents will supersede this documents .

DRAFT

DRAFT

# CHAPTER ONE

ATN Transition Plan



## Table of Contents

### Executive Summary

<b>1.</b>	<b>Introduction</b>	<b>2</b>	
1.1	Objectives.....	2	
1.2	Scope .....	2	
1.3	References .....	2	
<b>2.</b>	<b>CURRENT Ground Infrastructure</b>	<b>2</b>	
<b>3.</b>	<b>ATN END SYSTEM APPLICATIONS</b>	<b>3</b>	
<b>4.</b>	<b>ATN Traffic</b>	<b>4</b>	
4.1	Ground-Ground traffic.....	4	
4.2	Air-Ground Traffic .....	4	
<b>5.</b>	<b>ATN Routing Architecture</b>	<b>4</b>	
<b>6.</b>	<b>ATN Backbone Trunks</b>	<b>6</b>	
<b>7.</b>	<b>Interconnection of ATN Routers</b>	<b>7</b>	
<b>8.</b>	<b>Transition Activities</b>	<b>9</b>	
8.1	Phase 1 .....	9	
8.2	Phase 2 .....	10	
8.3	Phase 3 .....	10	



## 1. INTRODUCTION

This chapter presents a plan on the ATN ground activities applicable to the ICAO MID Region. It provides also information on the ground infrastructures required to support the ATN and to take into consideration progressively the ATN air-to-ground requirements of the Region.

### 1.1 Objective

### 1.2 Scope

The scope of the chapter one includes:

- A brief description of the current ground infrastructure and upgrade plans based on AFTN/CIDIN;
- The types of ATN applications that will be used over the ground infrastructure;
- The types of trunks that will need to be upgraded to cater for ATN traffic; and
- A proposed implementation schedule on how the ATN should be transitioned within the region.

### 1.3 References

- Reference 1 Annex 10
- Reference 2 Manual of Technical Provisions for the ATN (Doc 9705-AN/956) Second Edition 1999 (in process to be withdrawn and material to move to 9880)
- Reference 3 Comprehensive Aeronautical Telecommunication Network (ATN) Manual (Doc 9739-AN/961) First Edition 2000
- Reference 4 Manual on the ATN using IPS standards and protocols (Doc 9896 AN/469)
- Reference 5 Middle East AFTN/CIDIN Routing Directory
- Reference 6 ICAO Location Indicators – Document 7910
- Reference 7 MID Air Navigation Plan and Facilities and Services Implementation Document (ANP- FASID – Doc. 9708)
- Reference 8 ASIA/PAC Regional Aeronautical Telecommunication Network (ATN) Planning Documents
- Reference 9 EUR AMHS Manual - 4th Edition - April 2009

## 2. CURRENT GROUND INFRASTRUCTURE AND UPGRADE PLANS

2.1 The present ground-ground data communications system in the Middle Region comprises AFTN circuits and centers (tributary and main) that allow the exchange of ATS and other operational messages.

2.2 Five States of the Region already implemented the Common ICAO Data Interchange Network (CIDIN) as an upgrade of the low speed AFTN circuits to improve the efficiency and reliability of message exchange. These CIDIN circuits are operating at 9600Bps and the remaining circuits at 50 Bps to 300 Bps, using asynchronous protocols.

2.3 The detail of international circuits operating within the Region and between neighboring regions. is documented in Table CNS 1A of the ICAO MID CNS Facilities and Services Implementation Document (FASID).

2.4 The current AFTN topology in the Region shows that the majority of circuits will not be suitable to be used for the ATN without some form of upgrade. In later stage, it will be necessary to identify those circuits that need to be upgraded in both bandwidth and protocols.

2.5 With regard to bandwidth requirements, it is assumed that 64Kbps or higher shall

be used for Intra-regional connections while 64Kbps (based on agreement with other regions) or higher speed could be preferred for Inter-Regional connections when full ATN is implemented.

2.6 It is important to note that some States have already started the establishment of a communication infrastructure that would serve the ATN. There have been implementations of high speed point-to-point digital links operating at 64KBPS and carrying voice and data traffic.

2.7 In respect to the upgrade of protocols, it is expected that they will be implemented on a bilateral arrangements between States according to the preferred protocols: preferably TCP/IP V.6. **Frame Relay or Asynchronous Transfer Mode (ATM) or any other protocol that will be included in the ICAO Standards in future.**

2.8 It can happen that due to different planning activities, by States, not all States within the MID Region will be migrating to the ATN at the same time. Therefore, there will be a need to maintain the existing AFTN circuits to operate in parallel with any new implementation of high-speed links to meet ATN requirements and could migrate the AFTN.

**3. ATN END SYSTEM APPLICATIONS**

3.1 According to the Manual of Technical Provisions for ATN (Doc. 9705- AN/956) and Comprehensive Aeronautical Telecommunication Network (ATN) Manual (Doc 9739-AN/961), it is to be taken into consideration that 9739 will be with drawn also ATSMHS part is obsolete in doc 9705 and Superseded by Doc 9880. There are currently six end system applications. The table below lists these applications and provides a brief summary of their functions:

<b>Applications</b>	<b>Functions</b>
Context Management (CM)	An ATN application that provides a logon service allowing initial aircraft introduction into the ATN and provides also a directory of all other data link applications on the aircraft.
Automatic Dependent Surveillance (ADS)	An ATN application that provides data from the aircraft to the ATS unit(s) for surveillance purpose.
Controller Pilot Data Link Communication (CPDLC)	An ATN application that provides a means of ATC data communication between controlling, receiving or downstream ATS units and the aircraft, using air-ground and ground-ground sub-networks.
Flight Information Service (FIS)	An ATN application that provides to aircraft information and advice those are useful for the safe and efficient conduct of flight.
<b>ATS Message Handling Service (ATSMHS)</b>	<b>A set of computing and communication resources that are implemented by ATS organizations to provide the ATS message service.</b>
<b>ATS Inter-facility Data Communication (AIDC) and On-Line Date Interchange (OLDI)</b>	<b>An ATN application dedicated to exchanges between ATS units of ATC information in support of flight notification, flight coordination, transfer of control, transfer of communication, transfer of surveillance data and transfer of general data.</b> OLDI is seen as a subset of AIDC

**4. ATN TRAFFIC**

**4.1 Ground-Ground Traffic**

#### 4.1.1 ATS Message Handling System (AMHS)

4.1.1.1 With the introduction of AMHS as the replacement for AFTN/CIDIN, a number of AFTN circuit links between centers will need to be upgraded to cater for the increase of traffic load generated by AMHS overheads. Analysis carried out in other Regions showed that there will be significant overheads generated by AMHS for a typical message of about 250 bytes. As the message size increases the amount of overheads generated becomes less significant to the size of the body of the message. In transitioning from AFTN/CIDIN to AMHS, States will have to anticipate this increase in bandwidth to accommodate AMHS traffic so as to maintain current or better performance of traffic delivery.

#### 4.1.2 ATS Interfacility Data Communication (AIDC)

4.1.2.1 It is also important to note that there will also be an increase in other forms of data traffic due to implementation of other ATN applications such as the ATS Inter-facility Data Communication (AIDC) application. AIDC will generally be used by Flight Data Processors (FDP) to communicate between each other, which are normally established in each Flight Information Region (FIR). It can therefore be expected that data generated by this application will increase bandwidth requirements on those links that are required to pass this information between FIRs.

4.1.2.2 States will need to ensure that not only are the links that are established between States are capable of transferring data in a timely manner but also for those links that provide an alternate path for the applications to use in times of disruption to the primary links.

#### 4.2 Air-Ground Traffic

4.2.1 With the implementation of the air-ground applications it is important to ensure that transit response times are kept to a minimum level so as not to affect the overall response time that it takes for traffic such as ADS reports and CPDLC messages to be delivered to their final destination. This again reflects the need to ensure that critical ground links within the Region are capable of handling this information efficiently.

4.2.2 Another important factor with air-ground traffic is the generation of routing information that is caused by aircraft that will move between various ATN routing domains. To maintain this information in a defined area requires a minimum number of backbone routers to be implemented which protects the majority of all other ATN routers from being flooded with routing information.

### 5. ATN ROUTING ARCHITECTURE

5.1 The ATN infrastructure can be divided into two main areas to support both the air-ground and ground-ground applications that will operate over the ATN.

5.2 For air-ground support the ATN needs to support an ATN Routing Backbone network so that routing information about where an aircraft is can be maintained by this backbone. As aircraft move through various coverage media and FIR boundaries the ATN Routing Backbone will be notified of the changing routing data for each mobile aircraft in the region. The type of ATN Routing Backbone architecture for the Middle East Region is documented in the Middle East ATN Routing Architecture Plan (Reference ) and is summarized in Figure 5-1 of this document.

5.3 It is anticipated that the trunks used for the ATN Routing Backbone will also be used to carry ground-ground application data such as the AMHS. This of course depends upon the routing policies set up between each router, which determine which links are to be used for the different classes of traffic that can be expected to transverse the network.

5.4

5.5 **Figure 5-1** shows the proposed ATN Routing Backbone for ICAO MID Region. The ATN Router Backbone tries to use existing trunks that have already been established between the nominated States who will operate the backbone that is currently used for the AFTN.

Virtually these trunks will need to be upgraded to cater for the increase in traffic load that will be handled by the ATN. Further details about these trunks are documented in Section 6.

5.6 To improve the resilience and redundancy aspects of the ATN routing backbone, it is proposed that additional trunks be incorporated to ensure minimal disruption to the air-ground applications. This effectively ensures that the Middle East Region can function on its own without support from other regions relaying information on behalf of a failed router or trunk service within the ICAO MID Region. These additional trunks have been shown as dashed lines in Figure 5-1. Also shown are the inter-regional connections between the Middle Region and its neighboring Regions. Additional inter-regional connections are also proposed and are further documented in Section 6.

5.7 It is important to note that costs will may increase due to implementing higher bandwidth links (In some States only high bandwidth are avialable and cost less than the TTY circuits due to new technologies). Therefore the region should review its requirements in having to use point to point circuits every where when a number of strategically placed links may suffice with alternate dial up or IP VPN over secured channels on demand capabilities being deployed between key sites. This may help to offset the costs and still provide for an efficient ground-ground network for the ATN.

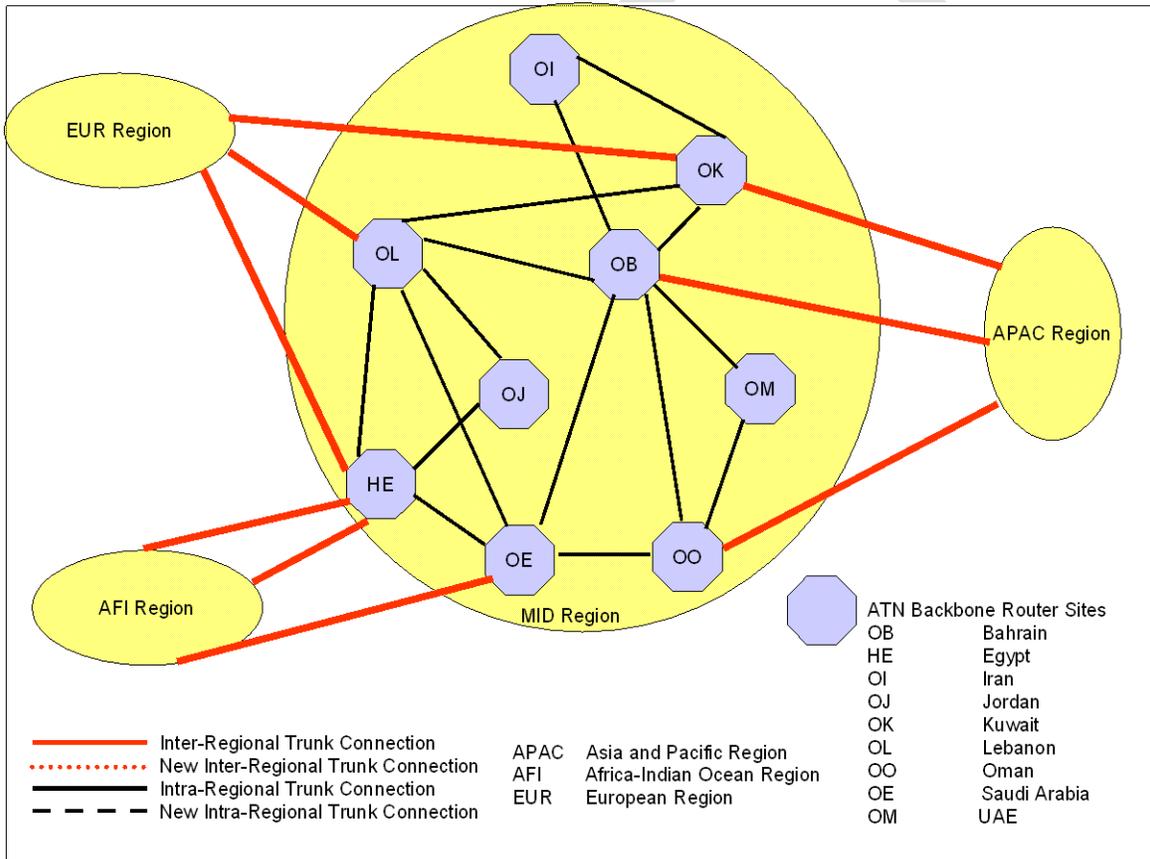


Figure 5-1 MID ATN Backbone Routing Architecture

## 6. ATN BACKBONE TRUNKS

6.1 Table 6-1 provides a list of existing or proposed upgrading of AFTN/CIDIN circuits that have been selected for the transition to the ATN routing backbone. Also provided in the table are

proposed additional new trunks that should be considered to provide the necessary redundancy and backup services for the ATN for the region.


6.2 As part of the transition from AFTN to the ATN, the existing link capacity, especially those using CIDIN Protocol must be able to handle both AFTN and ATN for those States who do not intent to migrate to AMHS straight away. It is assumed that States that have been nominated to provide the ATN backbone routing environment will do so in a timely manner so as to allow those States who are ready to start their implementation programs can do so without too much restriction within the region. Where a nominated State cannot provide the ATN backbone then an alternative arrangement should be put in place for another State, who is willing to provide the service (e.g Jordan UAE IP VPN connection).

**Table 6.1 AFTN Circuit Upgrade and Backbone BIS Implementation**

Nominated State	ATN Backbone Connection		Target Date Of Implementation		Trunk Type	Comments
	Speed	Protocol	Circuit	BBIS		
<b>Bahrain</b>				2009		
Singapore	19200 bps		2009		Inter-Regional	Upgrade of circuit
<b>Egypt</b>				2009		
Greece	64000bps	TBD	2009		Inter-Regional	Upgrade of circuit
Kenya	19200 bps	TBD	2009		Inter-Regional	Upgrade of circuit
Tunisia	19200 bps	TBD	2009		Inter-Regional	Upgrade of circuit
<b>Kuwait</b>				2009		
Italy (check EUR)	19200 bps	TBD	2009		Inter-Regional	Upgrade of circuit
Pakistan (check ASIA/PAC)	64000bps	TBD	2009		Inter-Regional	Upgrade of circuit
<b>Lebanon</b>				2009		
Cyprus	64000bps	TBD	2009		Inter-Regional	Upgrade of circuit
<b>Oman</b>				2009		
Mumbai	64000bps	X.25	2009		Inter-Regional	Upgrade of circuit
<b>Saudi Arabia</b>				2009		
Ethiopia	64000bps	xxxx			Inter-Regional	Circuit is upgraded

**7. INTERCONNECTION OF ATN ROUTERS**

7.1 This section describes the interconnection requirements for ATN routers for the Middle East Region. Table 7-1 shows a pictorial view of the interconnection between various States in the Region.

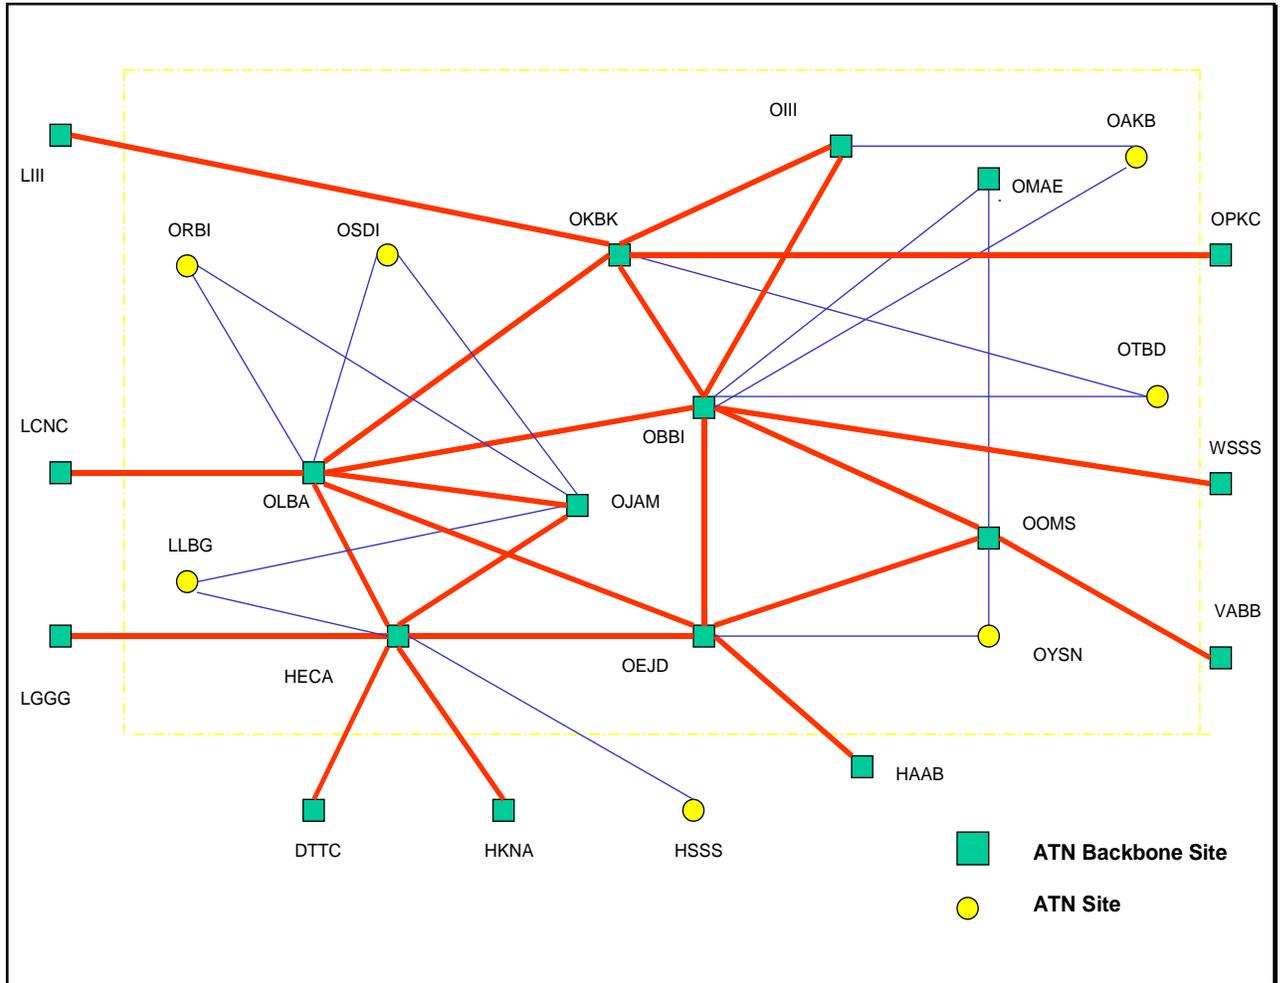

Libya to be added as ATN site (HECA – HLLL)

**Figure 7-1 MID ATN Router Interconnection**  
 (This needs to be updated based on the proposed additional intra-regional trunk)

7.2 It is proposed that all existing AFTN circuits are upgraded as soon as practicable to CIDIN or other modern protocols that are compatible with the ATN Lower Layers. In doing so, these links would be sized to cater for both AFTN and ATN. This would allow the region to set-up a sub-network that could support current operational requirements for AFTN and to allow trials and operation services of the ATN to be implemented at minimal cost to the region.

7.3 Further details have been provided in Table 7-1, which lists all international connections between countries and their proposed bandwidth requirements and implementation dates.

## MID Region BIS Routing Interconnections

Backbone State	ATN Interconnection		Target Date Of Implementation		Connection Type	Comments
	Speed	Protocol	Circuit	BIS		
<b>Bahrain</b>				2010		
Abu Dhabi	64Kbps	TBD	2003	2010	Intra-Regional	Circuit upgraded
Beirut	9600bps	TBD	2000	2010	Intra-Regional	Circuit upgraded
Doha	64Kbps	TBD	2003	2010	Intra-Regional	Circuit upgraded
Jeddah	64Kbps	TBD	2004	2010	Intra-Regional	Circuit upgraded
Kabul	9600bps	TBD	2005	2010	Intra-Regional	Upgrade of circuit required Upgrade of BIS required
Kuwait	64Kbps	TBD	2004	2010	Intra-Regional	Circuit upgraded
Muscat	9600bps	TBD	2005	2010	Intra-Regional	Upgrade of circuit required Upgrade of BIS required
Tehran	9600bps	TBD	2005	2010	Intra-Regional	Upgrade of circuit required Upgrade of BIS required
<b>Egypt</b>				2007		
Amman	64Kbps	TBD	2005	2007	Intra-Regional	Egypte to update
Ben Gurion	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Beirut	9600bps	TBD	2000	2007	Intra-Regional	Circuit upgraded
Jeddah	9600bps	TBD	2003	2007	Intra-Regional	Circuit upgraded
<b>Iran</b>				2007		
Bahrain	9600bps	TBD	2004	2007	Intra-Regional	Upgrade of circuit required
Kuwait	9600bps	TBD	2005	2007	Intra-Regional	Circuit upgraded
<b>Jordan</b>						
Baghdad	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Ben Gurion	9600bps	TBD	2003	2007	Intra-Regional	Circuit upgraded
Beirut	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Cairo	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Damascus	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
<b>Kuwait</b>				2007		
Baghdad	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Bahrain	64Kbps	TBD	2005	2007	Intra-Regional	Circuit upgraded
Beirut	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Tehran	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
<b>Lebanon</b>				2007		
Amman	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Baghdad	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Bahrain	9600bps	TBD	2000	2007	Intra-Regional	Circuit upgraded
Cairo	9600bps	TBD	2000	2007	Intra-Regional	Circuit upgraded

Backbone State	ATN Interconnection		Target Date Of Implementation		Connection Type	Comments
	Speed	Protocol	Circuit	BIS		
Damascus	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Kuwait	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Jeddah	9600bps	TBD	2004	2007	Intra-Regional	Upgrade of circuit required
<b>Oman</b>				2007		
Abu Dhabi	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Bahrain	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Jeddah	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Sana'a	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
<b>Saudi Arabia</b>				2007		
Bahrain	64Kbps	TBD	2007	2007	Intra-Regional	Circuit upgraded
Beirut	9600bps	TBD	2004	2007	Intra-Regional	Upgrade of circuit required
Cairo	9600bps	TBD	2003	2007	Intra-Regional	Circuit upgraded
Muscat	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
Sana'a	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required
<b>UAE</b>				2007		
Bahrain	9600bps	TBD	2003	2007	Intra-Regional	Circuit upgraded
Muscat	9600bps	TBD	2005	2007	Intra-Regional	Upgrade of circuit required

**Table 7 - 1 – MID Region BIS Routing Interconnections**

*Note: Speed requirements are an indication only and may vary between sites to meet different performance requirements for the type of ATN services and applications that are operating over each link.*

## 8. TRANSITION ACTIVITIES

It is recommended that there will be three phases in the implementation of the ATN infrastructure.

- Phase 1, Upgrade of existing sub network infrastructures to support the Backbone BISs (BBISs);
- Phase 2, Implementation of the ATN Regional BBISs; and
- Phase 3, Implementation of supporting ATN BISs.

### 8.1 Phase 1

8.1.1 This phase consists of upgrading existing AFTN circuits where possible that will support the introduction of the ATN Backbone BISs. Table 6-1 identifies those circuits that will need to be upgraded in both bandwidth and protocols.

8.1.2 In regards to bandwidth requirements, Table 6-1 proposes a preferred speed that will be required when full ATN is implemented. However, lower speeds may be introduced in the initial implementation phases between some locations by bilateral arrangements between States. States will be expected to monitor the performance of these links and increase bandwidth requirements as traffic load increases.

8.1.3 Where new circuits have been identified these will only need to be introduced on a case-by-case basis as BBISs are implemented.

8.1.4 In respect to the upgrade of protocols between States, it is recommend that any efficient Wide Area Network protocols is implemented in ATN routers such as TCP/IP, Frame Relay and Asynchronous Transfer Mode (ATM). This implementation of these protocols will be done on a bilateral arrangement between States.

## 8.2 Phase 2

8.2.1 Phase 2 consists of implementing the Backbone BISs (BBISs) that will support the MID Region. The BBISs are important to the success of the ATN implementation program for the region and will need to be reviewed regularly to determine if contingency arrangements should be put in place where nominated States fail to provide the infrastructure in a timely manner.

*Note: Implementation of Inter-Regional BBIS connections between MID Region and neighboring regions will also need to be determined and encouraged during this phase.*

## 8.3 Phase 3

8.3.1 Phase 3 is the implementation of all other BISs that will connect to the Backbone BISs.

Further information including initial target dates for the upgrade of the sub-network links and protocols and implementation of the BISs for each State can be found in the table CNS 1B – ATN Router Plan of the FASID. Refinement of the target dates will continue to be updated as States start to develop their implementation programs and can provide feedback to the ICAO MID Regional Office.

-----

# CHAPTER TWO

Routing Architecture Plan

## Table of Contents

### EXECUTIVE SUMMARY

<b>1. INTRODUCTION</b> .....	2
1.1 Terms Used.....	2
1.2 Acronyms Used.....	2
<b>2. ROUTING DOMAIN FUNDAMENTALS</b> .....	2
2.1 Intra-Domain Routing.....	3
2.2 Inter-Domain Routing.....	3
2.3 Type of Routing Domains .....	3
2.4 Routing Domain Construction.....	4
<b>3. ROUTER FUNDAMENTALS</b> .....	5
3.1 Boundary Intermediate System Overview.....	5
3.2 Router Types.....	5
3.2.1 Backbone BISs.....	5
3.2.2 End BISs .....	6
<b>4. ROUTING ARCHITECTURE</b> .....	6
4.1 MID Region Backbone .....	6
4.1.1 Regional Backbone.....	6
4.1.2 Backbone Router Requirements.....	7
4.1.3 Routing Policies .....	8
4.2 Inter-Regional Backbone .....	8
4.2.1 Long Term Implementation.....	8
4.2.2 Initial Implementation .....	9
4.2.3 Transition Issues.....	10
4.3 End BISs .....	10
<b>5. ROUTING DOMAINS</b> .....	10
<b>6. ATN TRANSITION</b> .....	10
6.1 Initial Regional Implementations .....	10
6.2 Regional ATN Implementations .....	10

## EXECUTIVE SUMMARY

This document provides technical guidance on the Planning and Implementation of the transition to the Aeronautical Telecommunication Network (ATN) for the ground data communications of the ICAO MID Region.

The material presented here is technical in nature. The ATN Transition Plan includes information about the implementation of Regional ATN Routing Architecture as presented in this document.

The routing architecture is based upon the need for a ground-ground infrastructure to eventually replace the existing AFTN/CIDIN infrastructure. For this reason, the routing architecture uses the existing AFTN/CIDIN infrastructure as a guideline for the positioning of ATN equipment.

The routing architecture is designed primarily for the ground-ground environment. It is intended that this architecture will also be suitable as the routing architecture for the introduction of the air-ground communication requirements.

## 1. INTRODUCTION

This initial plan provides technical guidance on the routing architecture for the Middle East Region.

### 1.1 Terms used

1.1.1 **Aeronautical Fixed Telecommunication Network (AFTN)**: a low-speed network providing the majority of ground-ground data communication services within the ICAO realm. This term is defined in ICAO Annex 10.

1.1.2 **Boundary Intermediate Systems (BIS)**: a router that supports IDRP and routes PDUs to more than one routing domain. This term is defined in ICAO Doc. 9705-AN/956 and 9739-AN/961.

1.1.3 **Backbone Boundary Intermediate Systems (BBIS)**: a router that primarily routes PDUs between routing domains and does not support End Systems.

*Note: This definition is similar to that found in ICAO Doc. 9705 and is meant to be consistent with that definition. This definition is made on the assumption that this version of the routing architecture is limited to the ground-ground infrastructure.*

1.1.4 **Common ICAO Data Interchange Network (CIDIN)**: a part of the aeronautical fixed service which uses bit-oriented procedures and packet switching techniques.

1.1.5 **End Boundary Intermediate Systems (EBIS)**: a router that primarily routes PDUs between routing domains and connected End Systems.

1.1.6 **End Systems (ES)**: an ATN system that supports one or more applications and that is a source and/or destination for PDUs.

1.1.7 **Inter Regional Boundary Intermediate Systems (IRBIS)**: a router that routes PDUs between systems (both End Systems and Boundary Intermediate Systems) within the Region with routers outside of the Region. These routers are the entry points into the Region and exit points from the Region for PDUs.

1.1.8 **Network Service Access Point (NSAP) address**: a 20-octet value that uniquely identifies an interface between the Transport Layer and the Network Layer. In the ATN it provides the address of transport entity providing ATN Internet services.

### 1.2 Acronyms used

AFTN	-	Aeronautical Fixed Telecommunication Network
BIS	-	Boundary Intermediate Systems
BBIS	-	Backbone Boundary Intermediate Systems
CIDIN	-	Common ICAO Data Interchange Network
CLNP	-	Connectionless Network Protocol
EBIS	-	End Boundary Intermediate Systems
ES	-	End System
IDRP	-	Inter-Domain Routing Protocol
IS	-	Intermediate System
PDU	-	Protocol Data Unit

## 2. ROUTING DOMAIN FUNDZAMENTALS

The ATN consists of a set of End-Systems (ESs) and a set of Intermediate Systems (ISs). ESs are the source and destination of all data and are where the applications reside. ISs are better known as routers and relay PDUs from one system to another.

The ISs and ESs are organized into *Routing Domains*. Routing Domains are used to define sets of systems (that typically operate together) into clusters. These clusters have two major properties:

- they are controlled by a single organization, and
- a significant amount of the traffic is internal to the cluster.

The single most important characteristic is that they are controlled by a single organization. This characteristic is manifested in technical terms by mutual trust between all routers in a routing domain. Routing protocols are based on the fact that the information exchanged between *intra*-domain routers can be trusted. No special reliability or trust is required to accept information about advertised routes.

The second characteristic, most traffic is internal to a routing domain, is more an artifact of proper network engineering. Routing domains are established through the NSAP addressing conventions established for the ATN in Doc. 9705, Sub-Volume 5. All systems with NSAP addresses defined with the same address prefix are by definition in the same routing domain.

### 2.1 Intra-Domain Routing

2.1.1 Intra-domain routing is the routing of PDUs from the source to destination where both are in the same domain. Intra-domain routing implies one or more ISs capable of routing PDUs across the domain. Examples of intra-domain routing would be CLNP-capable routers exchanging PDUs between two Local Area Networks.

2.1.2 Since the ATN is specified across State boundaries, there are no SARPs developed for intra-domain routing. The choice and configuration of internal routers is a local matter.

### 2.2 Inter-Domain Routing


2.2.1 The central definition of routing in the ATN is concerned with inter-domain routing. This is a particularly difficult problem since by the very nature of inter-domain routing; the information received cannot be fully trusted.

2.2.2 Inter-domain routing is based upon the mutual distrust of the received routing information. First, reliability mechanisms must be built-in to ensure the reliable transfer of the information. Second, the received information must be filtered to ensure that it meets the suitability constraints of the received system (in other words, can it be believed).

2.2.3 After receiving the routing information, the inter-domain router must build routing tables based upon its internal policy about routing its data.


### 2.3 Types of Routing Domains

2.3.1 There are two basic types of routing domains: end routing domains, and transit routing domains. An end routing domain routes PDUs to and from end-systems within its routing domain. Figure 1 shows an end routing domain.

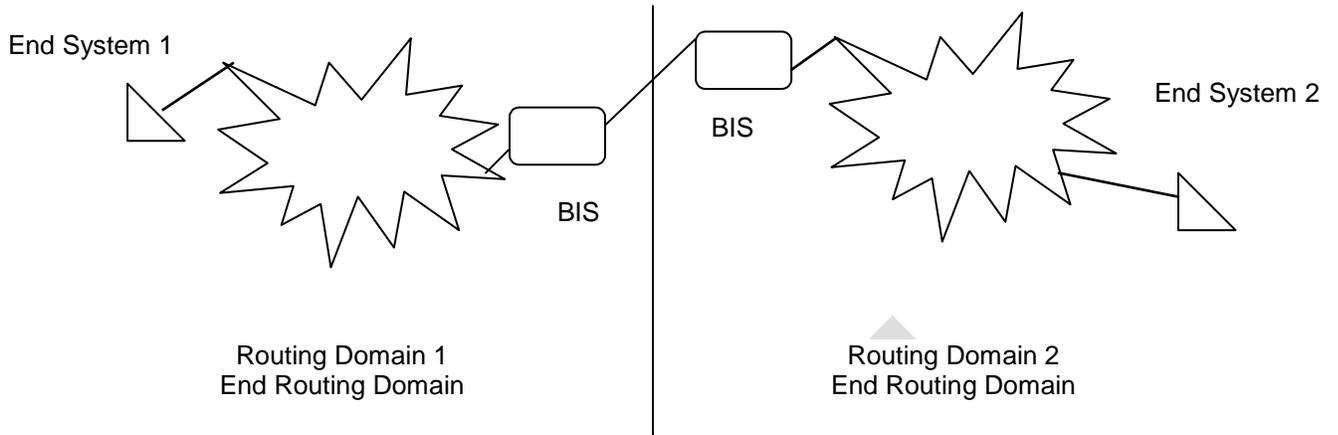

**Figure 1 – End Routing Domains**

A transit routing domain routes PDUs between two or more routing domains, and may as an option also act as an end routing domain. An example of a transit domain is where a set of backbone routers is configured in their own routing domain with all of the end systems in end routing domains attached to the backbone.

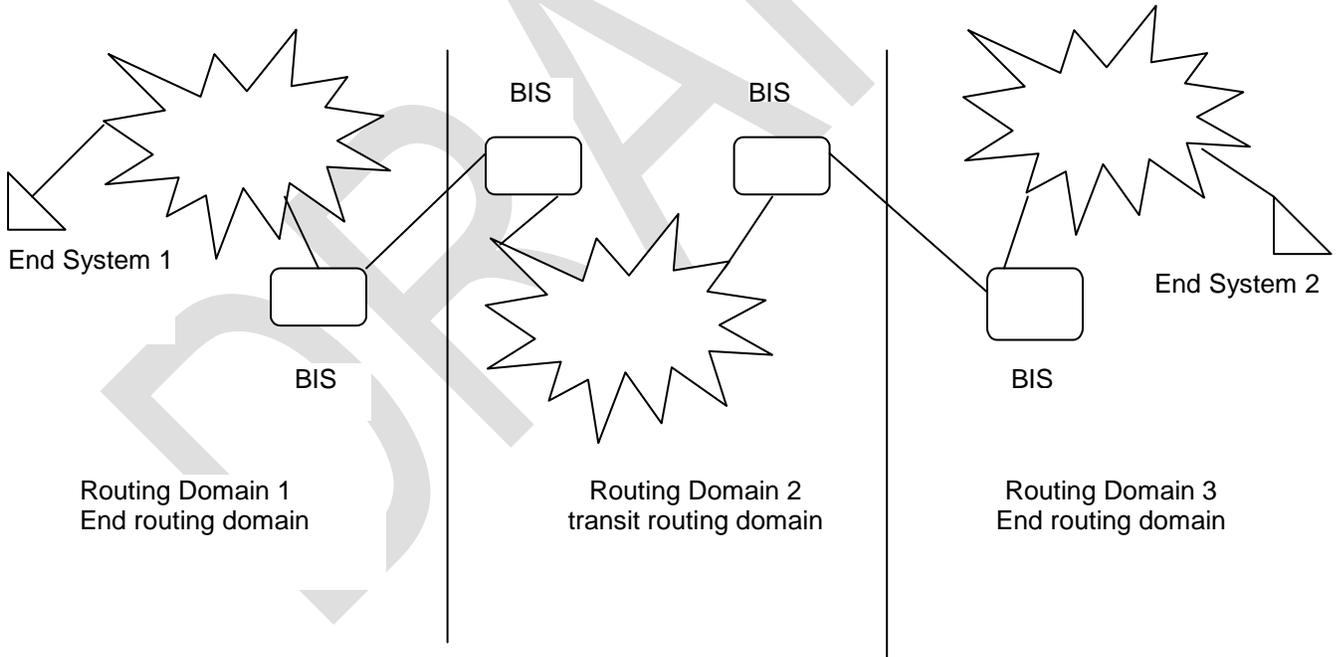

**Figure 2 – Transit Routing Domains**

*Note: A transit routing domain may or may not be part of the backbone. A transit routing domain may consist of BISs none of which are backbone routers.*

2.4 Routing Domain Construction

2.4.1 Based on the above, a routing domain consists of at least one inter-domain router.

*Note: There must be at least one BIS. There is no requirement for any other equipment.* Routing domains are elements of the physical structure of the ATN.

### 3. ROUTER FUNDAMENTALS

All routers discussed within this document are ICAO Doc. 9705 and 9739 compliant Boundary Intermediate Systems (BISs).

*NOTE: INDIVIDUAL STATES MAY ELECT TO USE OTHER ROUTERS THAT DO NOT COMPLY WITH THE ATN IDRP REQUIREMENTS AS FOUND IN ICAO DOC. 9705 WITHIN THE LIMITS OF THEIR OWN STATES. THESE ROUTERS ARE INTERNAL STATE ISSUES AND OUTSIDE THE SCOPE OF THIS DOCUMENT.*

#### 3.1 Boundary Intermediate System Overview

3.1.1 Boundary Intermediate Systems comprise the interfaces between networks, and in particular, between different routing domains. The term “Boundary Intermediate System” can often be replaced with the more common term “router”.

3.1.2 An important consideration in developing the routing architecture is the different roles that routers take within the ATN environment.

#### 3.2 Router Types

There will be two primary types of BISs employed within the Region:

- Backbone BISs (BBISs), and
- End BISs (EBISs).

*Note: A third type of BIS is supported within this routing architecture but since its use is subject primarily to bi-lateral agreements between States and Organizations, it is not fully described here. This third type of BIS is non-BBIS that acts as a transit router between two RDs but is not part of the Regional backbone.*

##### 3.2.1 Backbone BISs

3.2.1.1 A BBIS is a router that primarily routes PDUs between routing domains. These routers are typically higher performance routers that aid in the efficient flow of data between domains. BBISs may have End-Systems connected to them, but often are limited to only router-to-router connections.

3.2.1.2 Within the context of the MID Region, BBISs can be further subdivided into Regional BBISs, and Inter-Regional BBISs. Regional BBISs are backbone routers that only connect to routers within the Region. Inter-regional Backbone BBISs are those backbone routers that connect to BBISs in other Regions.

*Note: A single, high-performance router may act as both a Regional BBIS and an Inter-Regional BBIS based upon meeting the requirements for performance and reliability.*

*Note: For completeness of the routing architecture, it must be mentioned that the routers out-side of the Region to which Inter-Regional Backbone BISs attach are, in fact, Inter-Regional Backbone BISs in the other Region.*

*Note: The interconnections of backbone BISs typically require higher capacity communication lines based on the consolidation of traffic through those backbone routers. Even though the architecture takes into account existing AFTN infrastructure facilities, the need to upgrade the communication facilities as traffic through the backbone increases may be necessary.*

*Note: It is possible for some States to provide transit routing from its routing domain(s) to the routing domains of other States using BISs that are not backbone routers. For the purposes of this routing architecture, it is not possible to distinguish between these transit routing domain routers and BBISs.*

##### 3.2.2 END BISs

3.2.2.1 End BISs are connected to one or more BBISs and provide routing services to a single routing domain. Further, End BISs do not act as a transit router for passing PDUs between other routing domains.

#### 4. MID REGION ROUTING ARCHITECTURE

The MID Region routing architecture is based upon several concepts:

1. From a routing domain point of view, the Region can be considered an “autonomous” area, that is, there is a difference between routers located within the Region and outside the Region.
2. Routing domains and confederations of routing domains may be applied to areas within the Region.
3. States will make their own implementation and transition decisions.

The routing architecture can be divided into several distinct parts:

- the definition of the backbone routing structure for passing information between routing domains within the Region;
- the definition of the routing structure between routing domains not on the backbone;
- the definition of the routing structure for use in end-routing domains; and
- the definition of the routing structure for passing information from this Region to other Regions.

The first component is the definition of the backbone routing structure that supports the exchange of data within the Region. This part defines the interconnection of the major communication facilities in the Region and how they cooperate to link all of the systems in the Region.

The second component is the definition of the structure that allows end routing domains to exchange data across the backbone to another end routing domain. This part defines how the end routing domains connect through the backbone.

The third component defines the routing structure that is used within an end routing domain. This part defines how the individual routing domains may be used to pass data.

The fourth part is needed to define how data will be routed between the systems within the Region with those systems outside the Region. More importantly, the structure describes how all-global ATN systems are accessible from systems in the Region.

#### 4.1 MID Region Backbone

##### 4.1.1 Regional Backbone

4.1.1.1 The definition of a Regional Backbone is based upon the efficiencies that may be realized by concentrating ATN traffic at major communication centers and using the economy of scale in passing this information between major communication centers.

4.1.1.2 The rationale for defining Regional Backbone sites is based upon existing major AFTN center sites and on the flow of both AFTN traffic and possible future air-ground ATN traffic.

4.1.1.3 Within the Region there do exist main AFTN communication centers that can be used to simplify the definition of backbone architecture.

4.1.1.4 However, it must be understood that the expected growth in communication traffic over the ATN could quickly exceed the capabilities of the existing communication infrastructure.

Planning for the increased traffic loads will be needed as soon as ATN traffic begins to flow.

4.1.1.5 The architecture and communication requirements define a routing plan that incorporates alternate routing and communication paths so that no single router or communication failure can isolate major parts of the Region.

4.1.1.6 The nine (9) BBIS sites defined in Table 4.1-1 are based on the expected traffic flows. A current AFTN center site identified as a potential backbone router site. This site is listed first and in bold text as follows:

<b>ATN Backbone router site</b>	<b>State</b>
1	<b>BAHRAIN (Bahrain)</b>
2	<b>EGYPT (Cairo)</b>
3	<b>IRAN (Tehran)</b>
4	<b>JORDAN (Amman)</b>
5	<b>KUWAIT (Kuwait)</b>
6	<b>LEBANON (Beirut)</b>
7	<b>OMAN (Muscat)</b>
8	<b>SAUDI ARABIA (Jeddah)</b>
9	<b>UAE (Abu Dhabi)</b>

**Table 4.1-1 – Definition of MID Region Backbone Sites**

4.1.1.7 At each ATN Backbone router site, there should be at least one BBIS. States committing to operate backbone routers are presented in the table above.

4.1.1.8 Summarizing the information presented above, the MID Region Backbone network will consist of at least one BBIS router at each of the backbone sites identified above. The actual location of the routers will be based upon implementation schedules and the choices of States.

4.1.2 Backbone Router Requirements

The definition of BBIS and the location of these routers may be affected by the requirements for backbone routers. A backbone router must meet several performance and reliability requirements:

- Availability,
- Reliability,
- Capacity, and
- Alternative routing

4.1.2.1 Availability

A backbone router must provide a high-level of availability (24 hours a day, 7 days a week).

4.1.2.2 Reliability

A backbone router must be a very reliable system that may require either redundant hardware or more than one router per site.

4.1.2.3 Capacity

As a communication concentrator site, backbone routers must be capable of supporting significantly more traffic than other ATN routers.

4.1.2.4 Alternative Routing

Based upon the need for continuity of service, backbone routers will require multiple communication links with a minimum of two and preferably three or more other backbone routers to guarantee alternate routing paths in case of link or router failure.

4.1.3 Routing Policies

4.1.3.1 States providing Regional BBISs must be capable of supporting routing policies that allow for Regional transit traffic and for dynamic re-routing of traffic based upon loading or link/router failures.

4.2 Inter-Regional Backbone

The second component of the MID Region Routing Architecture is the definition and potential location of Inter-Regional Backbone Routers. The manner in which this architecture was developed was to ensure that the use of the existing communication infrastructure is possible to the greatest degree. The use of the existing communication infrastructure should reduce the overall cost of transitioning to the ATN.

As already indicated, the Inter-Regional BBISs provide communication from routers within the MID Region to routers in other regions. These Inter-Regional BBISs provide vital communications across regions and therefore need to have redundant communication paths and high availability. (Note: This can be accomplished through multiple routers at different locations.)

Based upon the current AFTN circuit environment, the following States have been identified as potential sites for Inter-Regional BBISs. The States currently have circuits with States outside of the MID Region are found in Table 4.2-1 below.

State	Neighboring Region	Current circuit
Bahrain	Asia-Pac	upgraded
Egypt	Africa Europe	To be upgraded Circuit upgraded
Kuwait	Asia-Pac Europe	to be upgraded No updated information
Lebanon	Europe	Circuit upgraded
Oman	Asia-Pac	No updated information
Saudi Arabia	Africa	Asmara Circuit upgraded Adis ababa upgraded

**Table 4.2-1 Table of Circuits with other ICAO Regions**

For the transition to the ATN, connectivity to the other Regions should be a priority. This is especially important as other Regions begin the transition to the ATN and begin deploying ATN BISs.

4.2.1 Long Term Implementation

4.2.1.1 The transition to a fully implemented ATN requires that connectivity amongst the IACO Regions be robust. That is, there is the need to ensure alternate paths and reliable communication. Table 4.2-1 presents a minimal Inter-Regional Backbone that provides a minimum of 2 circuits to other ICAO Regions that communicate directly with the MID Region. For the long-term implementation of ATN, it would be advisable to have 3 circuits to each Region. The addition of circuits to Africa should be considered.

Note: Information is needed on States Plan in implementing ATN.

4.2.2 Initial Implementation

4.2.2.1 The initial implementation of the ATN, outside of the MID Region, will most likely be in ASIA/PAC and Europe. Therefore, initial transition planning may focus on those locations.  
 Note: Information is needed on States Plan in implementing ATN.


4.2.2.2 For connecting to other Regions, there should be a minimum of two (2) Inter-Regional BBISs. The location of these Inter-Regional BBISs may be located at the centers where the AFTN/CIDIN centers already exist.

*Note: The locations presented above are examples of possible router sites. The selection of actual locations will be based on implementation schedules and circuit availabilities.*

*Note: For additional reliability, a third Inter-Regional BBIS would be preferred.*

4.2.2.3 For connecting to Africa, an Inter-Regional BBISs may be located at the location of the existing AFTN centers: Cairo or Jeddah. However, this router would not be needed until such time as ATN traffic is destined for that Region and the location of the router would be determined at that time.

*Note: Future work is still required for the definition of policy descriptions for the backbone architecture.*

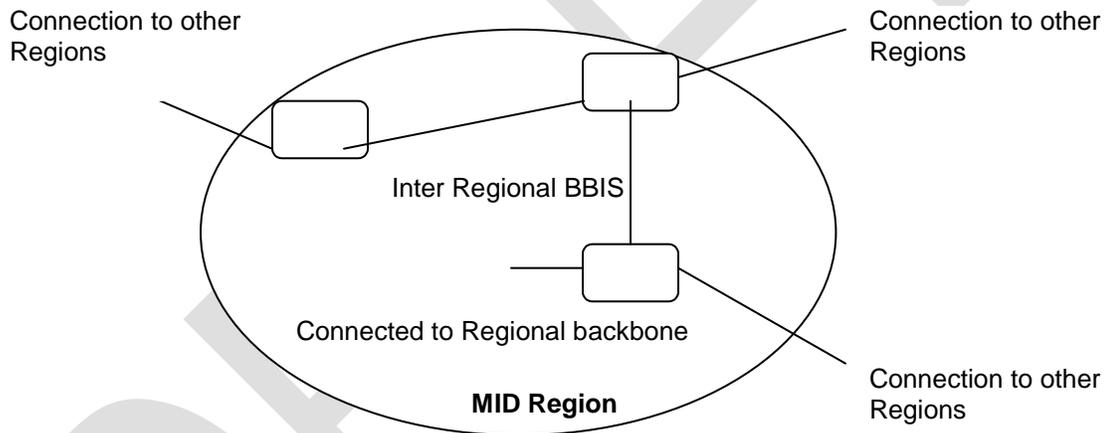

**Figure 3 – Inter-Regional Backbone Routers**

4.2.3 Transition Issues

4.2.3.1 The transition issues relating to the regional routing architecture is described in the ATN Transition Plan.

4.3 End BISs

4.3.1 It is assumed that naming and addressing (and routing domain definition) will be done on a Regional basis. Further, that for areas within the Region that may utilize an End BIS serving more than one State, the naming structure will be based on the Regional NSAP format defined in Doc. 9880 9705. Further, States may choose to either implement the Regional (or Sub-Regional) NSAP format or the State NSAP format based on whether it installs a BIS.

**5. ROUTING DOMAINS**

5.1 Each State is expected to have one or more routing domains. Where a State

chooses not to implement an ATN BIS, it may choose to incorporate its systems into a routing domain of another State.

5.2 The MID Regional ATN Backbone will consist of routers from the selected States. Each of these routers will be part of its State's routing domain.

*Note: This means that the backbone will not be configured with its own routing domain. Routing to the backbone and between backbone routers will be controlled through IDRP routing policies.*

5.3 Each State will be responsible for the designation of routing policies for its End Systems and End BISs. Individual States will also be responsible for establishing routing policies for routing to its designated BBIS.

The use of routing confederations is for further study.

## **6. ATN TRANSITION**

Based upon the previous sections, the implementation of the ATN within the MID Region may require considerable planning for the transition of the AFTN/CIDIN.

### 6.1 Initial Regional Implementations

6.1.1 The very beginning of ATN implementation will be bilateral testing between States. for this scenario, each State will need at a minimum:

- an ATN router,
- a means for managing the router,
- an ATN application, and
- a circuit connecting the States.

6.1.2 States involved in bilateral ATN trials should consider the use of the trial infrastructure in expanding the ATN throughout the Region.

#### **6.1.3 The below should provide the creterias required for testing:**

Rashid and Mahmood Ramadan to provide the full testing creteria.  
Mohamed Ali to provide the OLDI testing creteria

### 6.2 Regional ATN Implementation

6.2.1 At a certain time, sufficient bilateral trials will be underway to permit a Region-wide ATN network based upon the plan presented above. As each State implements the ATN applications and network infrastructure, it will be added to the Regional infrastructure according to this plan.

-----

# CHAPTER THREE

AMHS

<b>Table of Contents</b>	
<b>EXECUTIVE SUMMARY</b> .....	<b>3</b>
<b>1 INTRODUCTION</b> .....	<b>4</b>
1.1 OBJECTIVES.....	4
1.2 SCOPE.....	4
1.3 REFERENCES .....	4
1.4 ABBREVIATIONS.....	4
<b>2 AMHS NAMING CONVENTION</b> .....	<b>5</b>
2.1 MF-ADDRESSING FORMAT.....	5
2.2 XF-ADDRESSING SCHEME.....	6
2.3 NAMING CONVENTION FOR MF-ADDRESS FORMAT .....	6
2.3.1 <i>Country Name</i> .....	7
2.3.2 <i>ADMD</i> .....	7
2.3.3 <i>PRMD</i> .....	7
2.3.4 <i>Organization Name</i> .....	7
2.3.5 <i>Organizational Unit Name OU1</i> .....	8
2.3.6 <i>Common Name</i> .....	8
2.4 NAMING CONVENTION FOR XF-ADDRESS FORMAT .....	9
2.4.1 <i>Country Name</i> .....	9
2.4.2 <i>ADMD</i> .....	9
2.4.3 <i>PRMD</i> .....	9
2.4.4 <i>Organization Name</i> .....	9
2.4.5 <i>Organizational Unit Name OU1</i> .....	9
2.5 GENERAL USE OF X.400 O/R ADDRESSES .....	10
<b>3 CONCLUSIONS</b> .....	<b>10</b>
<b>4 RECOMMENDATIONS</b> .....	<b>10</b>

## **Executive Summary**

This document provides technical guidance on the naming convention for the transition of ground Aeronautical Fixed Telecommunication Network (AFTN) services to the ATS Message Handling System (AMHS) within the MID region.

Based upon the ATN SARPs as published in ICAO Annex 10 and ICAO Doc. 9880, Manual of technical provisions for the ATN (Doc 9705) ATSMHS part is obsolete Superseded by Doc 9880, the Regions are advised to develop naming and addressing plans. These Regional Plans may be used to guide States in the assignment and registration of addresses and names to be used for the Aeronautical Telecommunication Network (ATN).

An extract of the AMHS Register from the main ICAO register for the MID States is provided in this part for planning and implementation

This document presents the draft from other region which the IPS Working Group shall update.

## 1. Introduction

This document presents the naming assignment conventions for allocating Originator/Recipient (O/R) names to be used for the ATS Message Handling System (AMHS) in the MID Region.

The information contained in this document is drawn from a number of developments and will be continued to be updated by the IPS Working group members

### 1.1 Objectives

The objective of the document is to provide guidance in the naming convention to be used for the AMHS in the MID Region.

### 1.2 Scope

The scope of the document includes:

- Describing the attributes of the AMHS address format, and
- Recommending the values for the relevant attributes that are to be used in the AMHS address.

The MID Regional ATN AMHS naming convention presented here will comply with the relevant formats as specified in ICAO Doc. 9705 (Reference 1). The MID Regional ATN AMHS Naming Plan defines the method for assigning values to each of the relevant attributes of the AMHS address. States within the Region may choose to assign their AMHS addresses based upon the recommendations found here.

### 1.3 References

Reference 1 Manual of Technical Provisions for the ATN (Doc 9880 9705-AN/956) First Edition 1998.

Reference 2 ICAO Location Indicators – Document 7910/94

### 1.4 Abbreviations

The following abbreviations are used in this document:

ADMD	Administration Management Domain
AFTN	Aeronautical Fixed Telecommunication Network
AMHS	ATS Message Handling System
MIDANPIRG	Middle East Air Navigation Planning and Implementation Regional Group
ATN	Aeronautical Telecommunication Network
ATNTTF	ICAO ATN Transition Task Force
ATS	Air Traffic Service
ATSO	Air Traffic Service Organizations
ICAO	International Civil Aviation Organization
ITU-T	International Telecommunication Union Telecommunication Standardization Sector
MHS	Message Handling Service
MTA	Message Transfer Agent
O/R	Originator/Recipient
PRMD	Private Management Domain
SARP	Standards and Recommended Practices

## 2. AMHS NAMING CONVENTION

To ensure continuity and compatibility with other AMHS naming conventions developed by other regions, it is proposed that the MID Region's AMHS naming convention should be based upon coordination using the Europe ATS message Management Center AMC as recommended by the ICAO State letter AN 7/49.1-09/34, .

### 2.1 MF-Addressing Format

ICAO Document 9705 (Reference 1) states that the AMHS shall be composed of AMHS Management Domains. These AMHS Management Domains may elect to operate as either an Administration Management Domain (ADMD) or a Private Management domain (PRMD), depending on the national telecommunications regulation in force in the country where it operates and on its relationships with other Management Domains. Each AMHS user within an AMHS Management Domain is assigned an Originator/Recipient (O/R) name, which is also referred to as a MF-address. The attributes of a MF-address are described in the table below.

**Table 2.1-1 MF-Address Attributes**

Attribute	Notation	Comment
Country-name	C	
AFMD	A	
PRMD	P	
Organization-name	O	
Organizational Unit name	OUN	n = 1 -4
Common name		
Personal name	S G I GQ	Surname Given name Initials Generation Qualifier
Domain-defined-attributes	DDA	(DDA type) = (DDA Value), up to 4 attributes

It is recommended that States who are about to start their AMHS implementation programs should use the MF-Address format structure.

<sup>1</sup> SPACE (Study and Planning of AMHS Communications in Europe) is a project supported by the European Commission and is the combined efforts of the participating countries and organizations from EUROCONTROL, France, Germany, Spain and the United Kingdom.

### 2.2 XF-Addressing Scheme

In addition to the MF-address, the ATN SARPs have defined an XF-address format. ICAO Document 9705 (Reference 1) stipulates that the XF-address of a direct or indirect AMHS user shall be composed exclusively of the following:

#### 2.2.1 An AMHS Management Domain,

- 2.2.2 An organization-name attribute set to the 4-character value "AFTN" and encoded as a Printable String,
- 2.2.3 An organizational-unit-names attribute, which comprises the 8-character alphabetical value of the AFTN address indicator of the user, encoded as a Printable String.

It is recommended that States who have already started implementing the XF-Address format can do so but should consider migrating to the MF-Address format as soon as is practical.

### **2.3 Naming Convention For MF-Address Format**

At the third ATN Panel meeting it was recommended that ICAO register with the ITU-T the ADMD name "ICAO" as an international ADMD under the "XX" country code. It was also recommended that ICAO establishes and maintains a register of PRMDs allocated by air traffic service providers according to the "XX" + "ICAO" address structure. The management of this register would be established and maintained in the same way as the Location Indicators (Doc 7910) and Designators for Aircraft Operating Agencies, Aeronautical Authorities and Services (Doc 8585).

The Air Navigation Commission on the 1st of June 2000 approved these recommendations. It is therefore recommended that the MID region accept the format for the allocation of the first two attributes used in the O/R name.

It has been proposed in the ATN Panel working groups that a common naming convention be used worldwide to help stream line the addressing scheme and to ensure compatibility and consistency with other neighboring regions. This scheme would be based on the work that has been ongoing in Europe. It was also stressed that if States have not already started their implementation programs for AMHS that when planning to do so that they should adopt the MF-Address format over the XF-Address format.

It is therefore recommended for the MID region to adopt the proposed worldwide MF-Address format, which uses the following attributes to define the O/R name during the transition phase from AFTN to AMHS:

1. Country-name;
2. ADMD;
3. PRMD;
4. Organization-name;
5. Organizational-unit-name 1; and
6. Common Name.

#### **2.3.1 Country Name**

The country name is a mandatory requirement and shall consist of the two alphanumeric ISO 3166 Country Code "XX" encoded as a Printable String. ICAO has been requested by the ATN Panel to use the country code "XX" as this is a special code registered by the ITU-T for the purpose of allocation to international organizations, which do not reside within any particular country.

#### **2.3.2 ADMD**

The administrative domain is a mandatory requirement and shall consist of the Printable String "ICAO". ICAO has registered "ICAO" as the ADMD with the ITU-T. By providing the "ICAO" ADMD will allow the addressing schemes to be independent of any constraints that may be imposed by management domains in the global MHS or national regulations that may vary from region to region.

### 2.3.3 PRMD

The private management domain is an optional requirement but recommended to be implemented by States in the MID Region as part of the worldwide MF-Address format scheme.

The contents of this field can contain the ICAO Country Indicator specified by ICAO Document 9710 [Reference 2] or the name of the Air Traffic Service Organization (ATSO) that has been registered with ICAO. Where an ATSO has not yet assigned their PRMD then a default value will be allocated, which will use either one, two or three letters of the ICAO Country Indicator specified in ICAO Document 9710 [Reference 2]. This has been chosen for its simplistic and non-ambiguous format, which is already managed by ICAO. Hence providing an easier management role for ICAO who will be responsible for maintaining the register of all PRMDs allocated under the ADMD of "ICAO".

### 2.3.4 Organization Name

The organization name is used for defining the local or national geographical routing information. This information is to be assigned by the ATSO and for example can be based on the ICAO location indicator as specified in ICAO Document 9710 or some other value determined by an ATSO and published with ICAO. Figure 2.3.4-1 provides a pictorial view of how the organization name can be used in relation with the lower attribute structure.

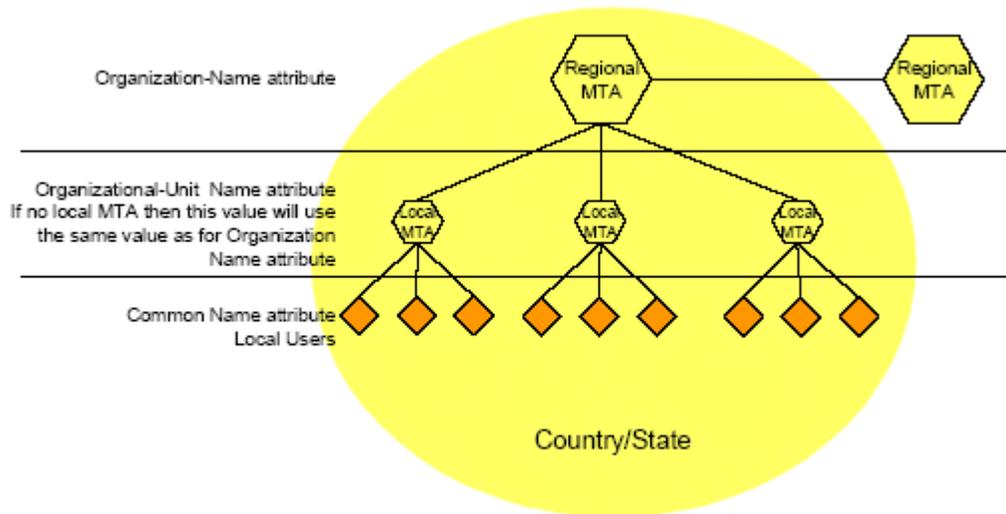


Figure 2.3.4-1 Lower Attribute Structure

### 2.3.5 Organizational Unit Name OU1

Each State or organization is allocated a unique ATS message organizational name. As all States are familiar with the ICAO four character location indicator defined in ICAO document 7910 (Reference 2), it is proposed that the organization unit name 1 use the location indicator to identify the Message Transfer Agent (MTA) site, encoded as a Printable String.

*Note: The MTA site may be the MTA name of the server. However there are security issues that need to be addressed to ensure that this arrangement does not cause any unnecessary concerns with service providers that allow the MTA name to be broadcast in this fashion.*

### 2.3.6 Common Name

It is proposed that during the AFTN transition to AMHS that the common name attribute be used to contain the 8-character alphabetical value of the AFTN address indicator of the user, encoded as a Printable String.

Possible example of an O/R address is shown in Table 2.3.6-1.

**Table 2.3.6-1 Example of a MF-Address AMHS Naming Convention**

Attribute	Assign By	Value	Comment
Country-name (C)	ITU-T	XX	International Organization
ADMD (A)	ICAO	ICAO	ICAO Responsibility to register
PRMD (P)	ATSO		ATSO registered private domain
Organization name (O)	ATSO		Local/national geographical information, which can be based on ICAO Location Indicators (Doc 7910)
Organizational-Unit name (OU1)	ATSO		ICAO Location Indicator (Doc 7910)
Common Name (CN)	ATSO		AFTN indicator address

### MID Region AMHS addresses

State	AMHS Address Specification							
State Name	Nationality Letters or Designator	Country-name attribute	ADMD-name attribute	PRMD-name attribute	Addressing scheme	ATN Directory naming-context	Organization-name (for CAAS only) single value or reference to the CAAS Table	Comments
Bahrain	OB	XX	ICAO	OB	CAAS		see Table OB	confirmed by SL
Egypt	HE	XX	ICAO	HE	CAAS		HECA	confirmed by SL
Iran (Islamic Republic of)	OI	XX	ICAO	OI	XF			confirmed by SL
Iraq	OR	XX	ICAO	OR	XF			
Israel	LL	XX	ICAO	LL	XF			
Jordan	OJ	XX	ICAO	OJ	CAAS		OJAC	confirmed by SL
Kuwait	OK	XX	ICAO	OK	XF			

Lebanon	OL	XX	ICAO	OL	XF			
Oman	OO	XX	ICAO	OO	XF			
Qatar	OT	XX	ICAO	OT	XF			
Saudi Arabia	OE	XX	ICAO	OE	XF			confirmed by SL
Syrian Arab Republic	OS	XX	ICAO	OS	XF			
UAE	OM	XX	ICAO	OM	XF			confirmed by SL
Yemen	OY	XX	ICAO	OY	XF			

### 2.4.5 Organizational Unit Name OUI

The organizational unit name 1 attribute is used to contain the 8-character alphabetical value of the AFTN address indicator of the user, encoded as a Printable String.

Possible example of an O/R address is shown in Table 2.4-1.

**Table 2.4.5-1 Example of a XF-Address AMHS Naming Convention**

Attribute	Assigned By	Value	Comment
Country-name (C)	ITU-T	XX	International Organization
ADMD (P)	ICAO	ICAO	ICAO Responsibility to register
PRMD (P)	ATSO	e.g. Australia	ICAO Country Indicator or ATSO registered private domain with ICAO.
Organization-name	ATSO	<b>AFTN</b>	AFTN name
Organization-Unit Name (OUI)	ATSO	e.g. YBBBYFYX	AFTN indicator address

### 2.5 General Use of X.400 O/R Addresses

*Note: The address format of X.400 O/R address attributes for sending general nonoperational AMHS traffic is a local matter for States to implement if they wish to do so and no further advice is given in this plan.*

### 3. Conclusions

The MID Region ATN AMHS Naming Plan aligns itself with the global AMHS naming scheme as proposed by the ATN Panel working groups. Also to maintain compatibility with in the region it is proposed that the MF-Address format should be adopted where a State has not yet started its AMHS implementation program. This will ensure compatibility with the proposed global AMHS naming scheme.

#### 4. MID AHMS Implementation

Com Center	Installation	Operation	MTA Name	AFTN /AMHS Gateway	ATS Message UA	ATS service level	Protocol (IPS, ATN)	Remarks
Bahrain		-	MTA-OB-1	Y	Y	Extended	Dual Stack	Support IPv4 only
Egypt	2008	-	MTA-HE-1	Y	N	Extended	Dual Stack	Support IPv4 only
Iran	-	-	-	-	-	-	-	-
Iraq	-	-	-	-	-	-	-	-
Israel	-	-	-	-	-	-	-	-
Jordan	2008	2010	MTA-OJ-1	Y	Y	Extended	Dual Stack	Support IPv4 only
Kuwait		-	MTA-OK-1	Y	Y	Extended		Support IPv4 only
Lebanon	-	-	-	-	-	-	-	-
Oman	2008	2009	MTA-OO-1	Y	Y	Extended		Support IPv4 only
Qatar		-	MTA-OT-1	Y	Y			Support IPv4 only
Saudi	2008	-	MTA-OE-1	Y	Y	Extended	Dual Stack	Support IPv4 only
Syria	-	-	-	-	-	-	-	-
UAE	2006	2009	MTA-OM-1	Y	Y	Basic		Support IPv4 only
Yemen	-	-	-	-	-	-	-	-

The MID Region shall use the Europe EUR AMHS Manual EUR Doc 020 and all its Appendices for the implementation of AMHS



# CHAPTER FOUR

## NSAP Addressing Plan

DRAFT



## 1. NSAP Addressing Plan

### Introduction

The MID Regional ATN Addressing Plan provides guidance to the States within the Region in assigning NSAP addresses to their ATN systems. The Plan addresses the need for consistency within the Region for address assignment.

To find a suitable ATN addressing convention that would be acceptable for use in the MID region requires a routing architecture that minimizes routing updates and overheads within the ground ATN infrastructure for both ground-ground and air-ground services and applications.

The ATN addressing convention must allow for an addressing scheme that is:

- Practical - to provide autonomous administration of ATN addresses for States and Organizations, and
- Flexible - to allow for future expansion and/or routing re-configuration of the ground ATN infrastructure with minimal re-assigning of ATN addresses.

The recommendations proposed in the MID Regional ATN Addressing Plan take advantage of the work performed by the European ACCESS1 Project (Reference 3).

1 ACCESS (ATN Compliant Communications European Strategy Study) is a project funded by the European Commission and jointly produced by the following companies and administrations: National Air Traffic Services (NATS), Deutsche Flugsicherung (DFS) and Service Technique de la Navigation Aérienne (STNA).

## 2. NSAP Address Format

The NSAP address format is defined in ICAO Doc. 9705 (Reference 1), Sub-Volume 5. The format is based upon the requirements specified in the base standard (ISO/IEC 8348) and incorporates the specific ATN requirements for addressing both ground and mobile systems.

The structure of the Network Service Access Point (NSAP) address is depicted in Figure 5.

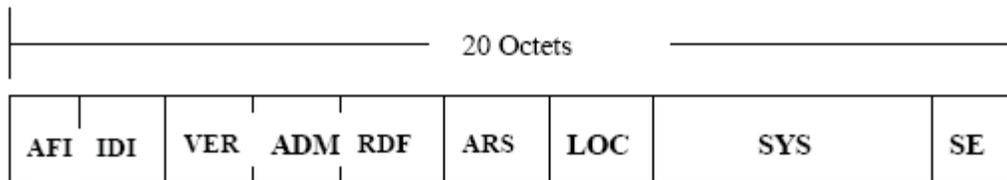


Figure 5 NSAP Address Format

The NSAP address structure contains 9 fields, which are described in Table 4.2-1.

Field Name	Field Description	Size	Syntax	Number of Characters/Digits	Field Encoding
AFI	Authority and format Identifier	1 Octet	Decimal	2 Digits	BDC
IDI	Initial domain Identifier	2 Octets	Decimal	4 Digits	BCD
VER	Version	1 Octet	Hex	2 Digits	Binary
ADM	Administration Identifier	3 Octets	Alpha or Hex/Alpha	3 Characters 2 Digits/ 2 Characters	IA-5 Binary/ IA-5
RDF	Routing Domain Format	1 Octet	Hex	2 Digits	Binary
ARS	Administration Region Selector	3 Octets	Hex	6 Digits	Binary
LOC	Location	2 Octets	Hex	4 Digits	Binary
SYS	System Identifier	6 Octets	Hex	12 Digits	Binary
SEL	NSAP Selector	1 Octet	Hex	2 Digits	Binary

**Table 4.2-1 - Encoding Rules for the ATN NSAP**

### 3 Recommendations For NSAP Address Fields Assignments

#### 3.1 The AFI and IDI Fields

The ATN Internet SARPs (Reference 1) require allocation of the following values:

- Decimal for the AFI field to indicate the type of NSAP being used. This value has been assigned the character sequence "47".
- Decimal for the IDI field to designate ICAO. This value has been assigned the character sequence "0027".

As recommended in Reference 1, ATN NSAP addresses and NETs will be written as the character sequence "470027+" where the "+" is used to separate the Binary Coded Decimal (BCD) fields from subsequent Hexadecimal fields.

Hence the AFI and IDI fields will be set to 470027 for fixed ATSC systems/domains and for mobile ATSC systems/domains.

#### 3.2 The VER Field

The VER field is used to partition the ATN Network Addressing domain into a number of subordinate Addressing Domains.

The values currently specified in Reference 1 for the VER field are summarized in Table 3.2-1.

VER Field Value	Network Addressing Domain	Common NSAP Address Prefix for Domain	Value to be used by States of MID region
[0000 0001]	Fixed AINSC	470027+01	
[0100 0001]	Mobile AINSC	470027+41	
[1000 0001]	Fixed ATSC	470027+81	470027+81 (ATSO Iss and Ess)
[1100 0001]	Mobile ATSC	470027+C1	470027+C1 (General Aviation)

**Table 3.2-1 - Defined Values for the VER Field**

### 3.3 The ADM Field

The ADM field is used to further partition the ATN Network Addressing Domain. The field designates a single State or Organization. Depending on what the VER field is set to will determine what values should be used in the ADM field.

When the VER field is set to “81” (Fixed ATSC), the ATN SARPs permits two possible ways for encoding the ADM field.

The first method recommends that the State’s three character alphanumeric ISO country code is used, as defined in ISO 3166. States may choose this method, however it will provide less flexibility than the second method for the addressing of regional entities (e.g. regional RDCs or regional organizations that are not country specific).

The second method that is recommended for use in the MID region is to use the first octet of the field to define the ICAO region. This would permit the reduction of the routing information that would otherwise be generated. It is recommended that the remaining two octets of the field will further identify the country, RDCs and the regional organizations that are not country specific as follows:

- For the identification of a country, it is recommended that States use the ICAO two letter location indicator (Reference 4) instead of the two character alphanumeric ISO 3166 country code. The structure of the ICAO two letter location indicator allows for a more efficient identification of a location. For example, indicators starting with the same letter “V” designate several countries in the same local region (e.g. Thailand, Sri Lanka, India, Cambodia etc.). The second letter will actually define the specific country within this local region (e.g. “VT” for Thailand, “VC” for Sri Lanka etc.). Where a country has several ICAO two letter location indicators allocated to it, the assigning authority of the ADM field will be responsible in determining the preferred location indicator to represent that country. For example, the indicators “VA”, “VI”, “VO”, “VE” are assigned to India and one of these indicators will be selected to represent India. The encoding of the ICAO two letter location indicators will be upper case alphanumeric values.

- For regional organizations that are not country specific, it is recommended to allocate a lower case alphanumeric value so as there will be no conflict with the ICAO two letter location indicators.
- For the addressing of RDCs (e.g. Island RDCs, Backbone RDCs), in particular for those that are not country specific, it is recommended to allocate codes with the most significant bit set to 1 in the second octet. Valid values would be in the hexadecimal range [8000 – FFFF].

ICAO MID Regional group would be the allocation authority of the ADM field.

In summary, the values allocated for the ADM field is indicated in Table 3.3-1.

<b>VER Field Network Addressing Domain</b>	<b>ADM Field Values</b>
Fixed AINSC	Derived from the set of three-character alphanumeric characters representing an IATA airline or an Aeronautical Stakeholder Designator.
Mobile AINSC	Derived from the set of three-character alphanumeric characters representing an IATA airline or an Aeronautical Stakeholder Designator.
Fixed ATSC	<p>To allow for efficient routing information to be exchanged, it is proposed that the ICAO Regional code be used in the first octet of the ADM field followed by the ICAO two-letter location indicator for countries.</p> <p>The Regional codes are shown below.</p> <p>Regional Codes:                      [1000 0000] Africa                      [1000 0001] Asia                      [1000 0010] Caribbean                      [1000 0011] Europe                      [1000 0100] Middle East                      [1000 0101] North America                      [1000 0110] North Atlantic                      [1000 0111] Pacific                      [1000 1000] South America</p> <p>For example Thailand would be represented by the following hexadecimal sequence: 815654. Table 4.3.3-2 provides further examples for a selected number of countries.</p> <p>Where a two letter country code is not applicable, the following rules would apply:</p> <p>ICAO would assign lower case alphanumeric characters using a two letter value to organizations that wish to be based in a particular region. For example, if an organization is to be based in the Pacific region and wanted to be represented by the characters 'sa', this would be represented by the following hexadecimal sequence: 877361</p> <p>ICAO would assign regional codes for RDCs where a country</p>

	code or organization code is not applicable. Values would be assigned with the most significant bit set to 1 in the second octet. For example a RDC established in the Pacific region would be represented by the following hexadecimal sequence: 878100.
Mobile ATSC	As for Fixed ATSC

**Table 3.3-1 - Defined Values for the ADM Field**

<b>Fixed or Mobile MID ATSC Addressing Domain</b>	<b>Hexadecimal Code of the ADM Field</b>	<b>Comment</b>
Australia	875942	Pacific Region + 'YB'
China	815A42	Asia Region + 'ZB'
India	815649	Asia region + 'VI'
Fiji	874E46	Pacific Region + 'NF'
Japan	81524A	Asia Region + 'RJ'
New Zealand	874E5A	Pacific Region + 'NZ'
Singapore	815753	Asia Region + 'WS'
Thailand	815654	Asia Region + 'VT'
Viet Nam	815656	Asia Region + 'VV'

**Table 3.3-2 – Example of Proposed ADM Value Assignment for Selected Asia/Pacific Entities**

**3.4 The RDF Field**

The RDF field is historical and is not used. Therefore the RDF field shall be set to [0000 0000].

**3.5 The ARS Field**

The ARS field is used to:


- Distinguish Routing Domains operated by the same State or Organization (in Fixed Network Addressing domains); and
- Identify the aircraft on which the addressed system is located (in Mobile Network Addressing Domains).

Each State or Organization identified in the ADM field will be responsible for assigning the values for the ARS field.

In accordance with the SARPs, for a Mobile Network Addressing Domain, the 24-bit ICAO Aircraft Identifier is inserted in the ARS field. However, no specific values have been specified for Fixed Network Addressing Domains.

The ARS field shall be assigned in a manner that simplifies the routing of data and makes provision for any potential lower level organizational units that could, in the future, operate an ATN Routing Domain.

The MID Regional ATN Addressing Plan recommends the ARS field be decomposed into three subfields as shown in Figure 4.3.5-1: Network ID, Network Group ID and Domain ID.

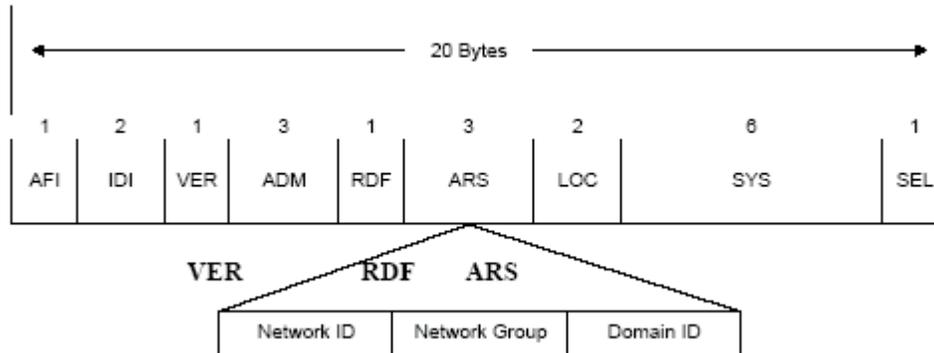

**Figure 4.3.5-1 Proposed ARS Field Format**

### 3.5.1 Network ID

Potential future operators of an ATN Routing Domain could be:

- A national Air Traffic Service Organization(s) (ATSO);
- A national military organization;
- A national meteorological organization; and
- An airport operator.

At present it is assumed that military organizations and meteorological organizations will not start up their own ATN Routing Domains and will be located within a national ATSO ATN Routing Domain. The same may apply to airport operators.

However in planning for the long term it is deemed necessary that provision is made available for these future possibilities.

In allowing for this possible expansion, it is recommended that the different ranges of values for the Network ID subfield be allocated to the different national organizations as follows:

- Hexadecimal values [00 – 1F] of the first octet of the ARS field be reserved for the addressing of domains and systems operated by the national ATSO.
- Hexadecimal values [20 – 3F] of the first octet of the ARS field be reserved for the addressing of domains and systems operated by the national military organization.
- Hexadecimal values [40 – 5F] of the first octet of the ARS field be reserved for the addressing of domains and systems operated by the national airport operators. (Note: this range matches the ASCII range of alphabetical upper case characters).
- Hexadecimal values [60 – 7F] of the first octet of the ARS field is reserved for the addressing of domains and systems operated by the national meteorological organization.
- Hexadecimal values [80 – FF] are reserved.

A national organization would then be able to register one or several values for the Network ID subfield within the range that has been reserved for its organization category.

In addition to the Network ID subfield being used for distinguishing the different national organizations, it is proposed that this subfield also be used for the identification of the particular role of the addressed domain. For example, setting the Network ID subfield to the hexadecimal value "01" would represent the set of operational Routing Domains of the national ATSO. Setting

the Network ID subfield to hexadecimal “11” would represent the set of non-operational Routing Domains of the national ATSO. In using the Network ID subfield in this manner, allows national ATSOs to provide for a duplicate non-operational network to be used for trials and pre-operational testing. Similar arrangements could be used for the other national organizations.

**3.5.2 Network Group ID**

This subfield can be used to subdivide a ground ATN network into smaller groups. This field is unique within a particular network. This may be useful for future expansion by allowing regions to be formed within a particular network as defined by the Network ID. The formation of regions may be useful in helping contain the routing traffic exchanged within the network.

This subfield is also used to designate an RDC. RDCs can also be used to assist in the formation of regions within an Administrative Domain and they offer an additional level of flexibility when used to combine RDs into a confederation. RDCs are designated by setting the uppermost bit of this subfield to “1”.

**3.5.3 Domain ID**

This subfield is a unique identifier assigned to each Routing Domain in the Network Group.

Table 3.5.3-1 shows possible examples on how the ARS field could be used. In the table two Network Groups “01” and “02” are defined. These two Network Groups can for example represent two FIRs in a country. One of the two Network Group contains two RDs and the other one contains three RDs. These two Network Groups can also address the initial RDs in a country (i.e. two RDs) with a planned expansion towards five RDs.

Network ID	Network Group ID	Domain ID	Comment
01	01	01	Network ID “01” indicates an ATSO operational network that contain two Network Groups “01” and “02”. Network Group “01” contains two RDs “01” and “02”. Network Group “02” contains three RDs “01”, “02” and “03”.
		02	
	02	01	
		02	
		03	

**Table 3.5.3-1 – Example of ARS Value Assignment**

**3.5.4 Addressing RDCs in the ARS field**

The Network Group ID subfield is used to segregate the addressing space of actual RDs and RDCs. When the uppermost bit of the Network Group ID subfield is set to “1” the second and third octets of the ARS field are assigned from the RDC addressing space (i.e., 8000-FFFF) and must be unique within that addressing domain. Otherwise, the subfields are assigned from the NSAP Address Space as described above for the Network Group ID and Domain ID subfields.

Similar principles as explained in sections 3.5.2 and 3.5.3 for the addressing of RDs can be applied to the addressing of RDCs, as required:

- The second octet of the ARD field may identify a group of RDCs.
- The third octet of the ARS field identifies RDCs.

### 3.6 The LOC Field

The LOC field is used to:

- Distinguish Routing Areas within Fixed Routing Domains, identified by the ARS field; and
- Distinguish Routing Areas and Routing domains within aircraft identified by the ARS field.

The assignment of the LOC field value is the responsibility of the State or organization that is the addressing authority for the routing domain in which the identified routing area is contained.

To assist States or organizations, it is recommended that the LOC field be decomposed into two subfields as shown in Figure 3.6-1: Subdomain Group ID and Subdomain ID.

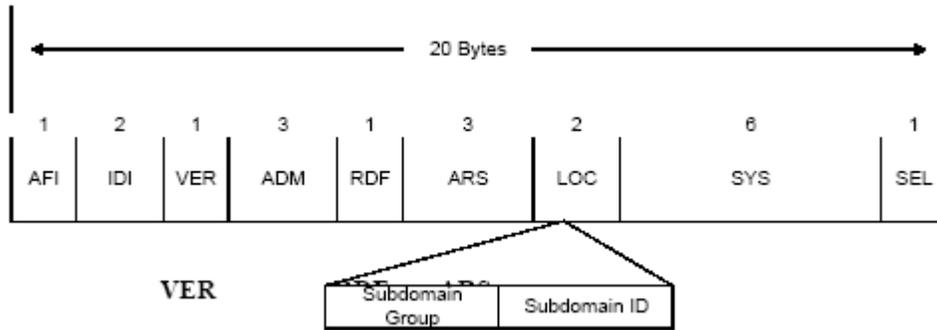


Figure 3.6-1 Proposed LOC Field Format

#### 3.6.1 Subdomain Group ID

This subfield can be used to subdivide a domain into separate groups. For example, each control centre could be defined as a routing domain. A control centre may contain an EnRoute facility, Terminal facilities, and Tower facilities. Each of these facilities can be classified as a different Subdomain Group allowing addressing to be delegated to each facility, if desired. For this example, this subfield can be assigned as shown in the Table 3.6.1-1.

Value (hex)	Description
00	Reserved
01	No specific group. Used for RDs that do not require subdivision
02	EnRoute Subdomain
03 - FF	Assigned as required

Table 3.6.1-1 – Example of Subdomain Group ID Value Assignment

### 3.6.2 Subdomain ID

This subfield is a unique identifier assigned to each routing area within a Subdomain Group. This subfield allows multiple areas to exist within a subdomain group and must be unique within the subdomain. This subfield could be assigned as shown in the Table 4.3.6.2-1.

Value (hex)	Description
00	Reserved
01	No specific area. Used for Subdomains that do not require subdivision
02 - FF	Assigned as required by the Subdomain Group Addressing Authority

**Table 3.6.2-1 – Example of Subdomain ID Value Assignment**

### 3.7 The SYS Field

The SYS field is used to uniquely identify an End-System or Intermediate-System. The allocation of the SYS field value is the responsibility of the organization that is the addressing authority for the routing area that contains the identified ATN End-System or Intermediate-System.

The type of values or structure for the SYS field is for individual authorities to choose, as appropriate.

It has been suggested that the 48-bit LAN address of a device attached to an IEEE 802 local area network that is being used as an ATN ES or IS, could be used in this field. However, this may have ramification if the SYS field is tied to a subnetwork dependent information such as the physical network address (e.g. 48-bit LAN address) that is associated with a particular device. The problem will occur when the device is replaced by another device which will use a different 48-bit LAN address, requiring the NSAP address of the ATN ES or IS to be changed.

It is therefore recommended that the SYS field be used to identify the system without any dependency on physical information. Possible examples of this is to define whether the system is an IS or an ES, the type of function or role the system is used for (e.g. primary system, hot standby system, cold standby system, etc.), or the type of applications that are running on the system (e.g. AMHS, AIDC, ADS, CPDLC, Network Management, etc.). A requirement found in Section 7.1.4.b.1 of ISO 10589 IS-IS states that all Level 2 ISs within a Routing Domain must have a unique SYS field value. In order to enforce this requirement related to IS-IS Level 2 addressing, it is recommended that the values assigned to the LOC subfields also be assigned to the upper two octets of the SYS field. Using this approach enables the addressing authority for each Subdomain Group the flexibility to assign addresses without conflicting with addresses of other groups within the same Routing Domain.

**3.8 The SEL Field**

The SEL field is used to identify the End-System or Intermediate-System network entity or network service user process responsible for originating or receiving Network Service Data Units (NSDUs).

Table 3.8-1 identifies the defined values that shall be used in this field in accordance with Reference 1.

SEL Field Value	Used
[0000 0000]	Used for an IS network entity except in the case of an airborne IS implementing the procedures for the optional non-use of IDRP.
[0000 0001]	Used for the ISO 8073 COTP protocol in the Ground or Airborne End-Systems.
[0000 0010]	Used for the ISO 8602 CLTP protocol in the Ground or Airborne End-Systems.
[1111 1110]	Used for an IS network entity belonging to an airborne IS implementing the procedures for the optional non-use of IDRP.
[1111 1111]	Reserved

**Table 3.8-1 - Defined Values for the SEL Field**

**4. Conclusions**

The MID Regional ATN Addressing Plan consists of a set of recommendations for each State to assign regional NSAP addresses in a consistent manner. Using these recommendations, it should be possible to develop efficient routing policies that limit the amount of information exchange while providing comprehensive ATN services. Further, the application of this plan will permit simplified ATN service growth with a minimum of router re-configuration.

**5. Recommendations**

The members of the IPS Working group to review and comment on the MID Regional ATN Addressing Plan as presented above.

-----

# CHAPTER FIVE

## ATN using IPS standard:

### ATN using IPS standard:

The Internet Protocol suite (IPS) is made of four layers: media access,

network, transport and application. There are three major physical components of the ATN/IPS: IPS host, IPS router and interconnecting sub networks.

### **IPV6 internetworking**

The Internet Protocol (IP) is an unreliable and connectionless protocol that is performed across various technologies of subnetworks. ATN/IPS makes use of IP version 6 (IPv6) (RFC 2640). In comparison with the preceding IPv4, the IP address space has been expanded and more flexibility is provided with additional features.

Mobile (airborne) nodes in the ATN/IPS shall implement Mobile IPv6 (RFC 3775) that allows IPS host to move in the internet from one network to another. Mobile host has two IP addresses , its original address, called home address and a temporary address, called the care-of address.

### **Interior and exterior routing**

To provide sufficient flexibility for the establishment of routing policy in large TCP/IP environment, the Internet is divided into autonomous systems (AS), AS are uniquely identified by AS numbers in Doc 9896, Table 1-1 show the AS number of countries in MID region:

Country	AS Number	Country	AS Number
Bahrain	64590	Lebanon	64596
Egypt	64559	Oman	65256
Iran, Islamic Republic of	64582	Qatar	65269
Iraq	64583	Saudi Arabia	65278
Israel	64584	Syria	65290
Jordan	64588	United Arab Emirates	65299
Kuwait	64593	Yemen	65309


Table 1-1

Mid Region Main centers shall use dual stack IPS router which support IPv6 and IPv4 , IPS routers which support inter-domain dynamic routing shall implement the Border Gateway Protocol (BGP-4), and Static routes can be used with point-to-point Intra-domain connection or RIP routing protocol.

### **Border Gateway Protocol (BGP)**

The border Gateway protocol is the de facto standard exterior routing protocol in Internet, which allows routers in different Ass to cooperate in the exchange of routing information by means of message which are sent over TCP connections.

The BGP-4 algorithm has been expanded to solve the "multi-homing" issue of an AS, that means an AS can have multiple network interfaces so that the connectivity between Ass becomes fault-tolerant incase of network failure.

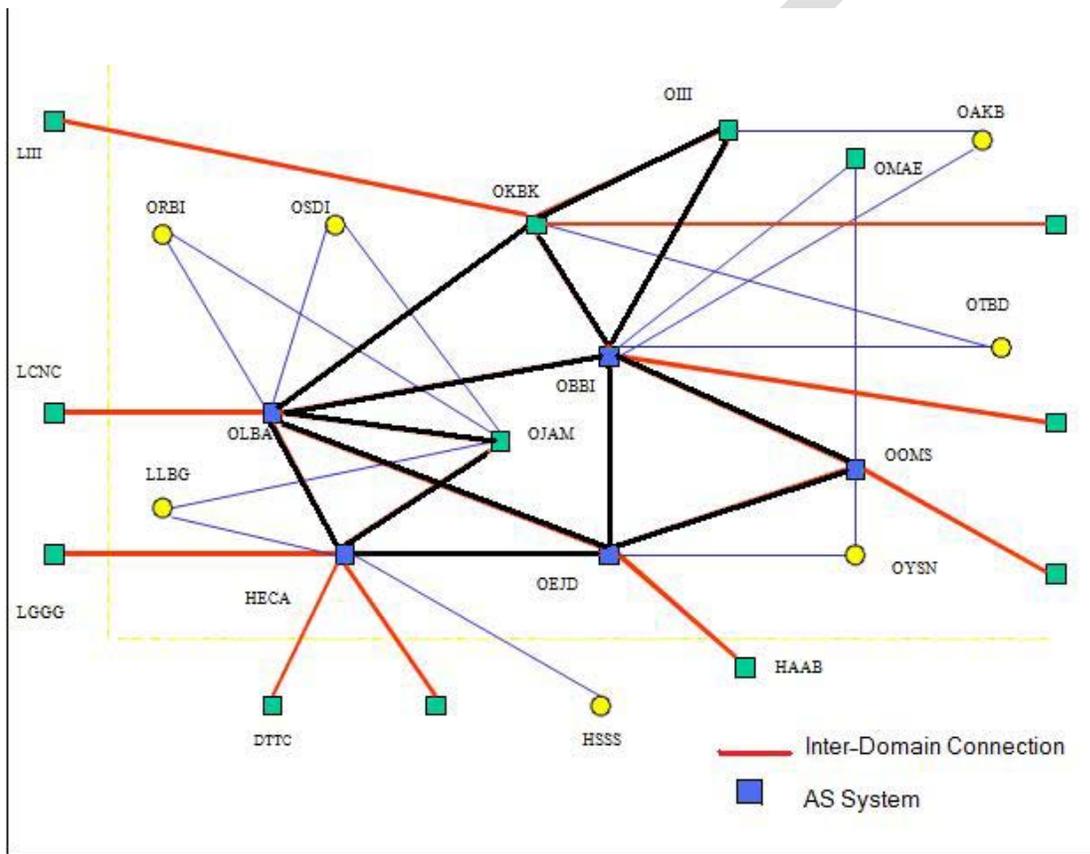

## Transport Protocols

IPS host shall implement the Transmission Control Protocol (TCP) and the User Datagram Protocol (UDP), Furthermore ATN/IPS hosts are required to supporting the following registered port numbers:

- ✚ tcp 102 for ATSMHS
- ✚ tcp 8500 for FMTP
- ✚ tcp/udp 5910 for CM
- ✚ tcp/udp 5911 for CPDLC
- ✚ tcp/udp 5912 for FIS
- ✚ tcp/udp 5913 for ADS

### **Transition Activities:**

*In addition to what is mentioned in 1.8*

- ✚ Implementation of IPS Router that support IPv4 and IPv6 .
- ✚ Upgrade all systems to support IPv6.
- ✚ Implementation of Network Transition Mechanism.

### **Network Transition Mechanism**

Three transitions mechanisms can assist countries to deploy the ATN IPS in a heterogeneous environment:

o Tunnelling: IPv6 has been specified to operate over a variety of lower layer interfaces such as Frame Relay, ATM, HDLC, PPP and LAN technologies. Tunnelling implies that a given protocol is encapsulated into another, meaning that IPv6 would be encapsulated into another functionally equivalent network protocol.

o Dual stack: The dual stack mechanism implies that an implementation handles more than one communications protocol for a given application or function by supporting both IPv4 and IPv6 protocols.

o Translation: Translation mechanisms imply the conversion from one protocol to another. Network Address Translation Protocol Translation (NAT-PT), have been developed in the context of the transition from IPv4 to IPv6 as both versions share a number of common features.

IPS WG/2  
Appendix 3B to the Report on Agenda Item 3

**Table CNS 1A – AFTN Plan**

**BAHRAIN OBBI**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks		
		Type	Bandwidth/ Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code				
1	2	3	4	5	6	7	8	9	10	11	12		
ABU DHABI	T		64 - 96	CIDIN	IA-5	SAT/d	64 Kbps 64 Kbps	AMHS	CBI	1 <sup>st</sup> QTR 2010	Bahrain ready		
BEIRUT	M		9600 bps	CIDIN	IA-5								
DOHA	T		64 – 96	None	IA-5								
JEDDAH	M		64 - 96	None	IA-5					AMHS		CBI	1 <sup>st</sup> QTR 2010
KABUL	T		--										
KUWAIT	M		64- 96	None	IA-5								
MUSCAT	M		300 Baud	None	IA-5								1 <sup>st</sup> QTR 2010
SINGAPORE	M		9600 bps	None	IA-5					AMHS		CBI	1 <sup>st</sup> QTR 2010
TEHRAN	M		64 96	None	IA-5								

**TEHRAN OIII**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks					
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code							
1	2	3	4	5	6	7	8	9	10	11	12					
BAHRAIN	M		64 Kbps	None	IA-5	SAT/d					Bahrain ready					
KABUL	T		-													
KUWAIT	M		64 Kbps	None	IA-5											

**JEDDAH OEJN**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
ADDIS-ABABA	M		9600	None	IA-5						
BAHRAIN	M		64 /9.6	CIDIN	IA-5						
BEIRUT	M		9600	CIDIN	IA-5						
CAIRO	M		128/9.6	CIDIN	IA-5						
MUSCAT/SEEB	M		300	None	ITA-2		9600			2010	
SANA'A	T		9600	None	IA-5						

**DAMASCUS OYSN**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
ATHENS	M		2 X 50	None	ITA-2		9600 bps			2010	
AMMAN	T		64/9.6	None	ITA-2		9600 bps			2009	
BEIRUT	M		2 X 50	None	ITA-2		9600 bps			2010	
CAIRO	M		50 BD	None	ITA-2		9600 bps			2009	
KUWAIT	M		50BD	None	ITA-2		9600 bps			2009	
TEHRAN	M		50BD	None	ITA-2		9600 bps			2010	

## AMMAN OJAN

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
BAGHDAD	T		-	-	-		-			2010	Circuit not operational
BEIRUT	M		-	-	-		-			2010	
BEN GURION	T		1200	None	IA-5						
CAIRO	M		64/9.6	None	IA-5						
DAMASCUS	T		64/9.2	None	IA-5						
JEDDAH	M		64/19.2	None	IA-5						

**CAIRO HECA**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
AMMAN	M		64/9.6	None	IT-5					2010	
ATHENS	M		64/9.6	CIDIN	IA-5					2010	
BEN GURION	T		64/9.6	None	IA-5					2010	
BEIRUT	M		9600	CIDIN	IA-5					2010	
JEDDAH	M		128/9.6	CIDIN	IA-5		128 K			2010	
KHARTOUM	T		9600	None	IA-5					2010	
NAIRUBI	M		9600	None	IA-5					2010	
TUNIS	M		64/9.6	None	IA-5					2010	
TRIPOLI	M		64/19.2	None	IA-5						
TRIPOLI	M										

**KUWAIT OKBK**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
BAHRAIN	M		64/9.6	None	IT-5						
DAMASCUS	T		50 BD	None	ITA-2						
BEIRUT	M		100 BD	None	ITA-2						
TEHRAN	M		64/9.6	None	IT-5						
KARACHI	M		2.4	None	IA-5						
BAGHDAD	M		9.6	None	IA-5						
DOHA	T		100 BD	None	ITA-2						

3B-5

## LEBANON OLBA

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
AMMAN	M		-	-	-					2010	
BAGHDAD	T		-	None	-						
BAHRAIN	M		9600	CIDIN	IA-5						
CAIRO	M		9600	CIDIN	IA-5						
DAMASCUS	T		2 x 50 bd	None	ITA-2						
JEDDAH	M		9600	CIDIN	ITA-2						
KUWAIT	M		100 BD	None	ITA-2						
NICOSIA	M		9600	CIDIN	IA-5						

## MUSCAT OOMS

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
ABDU DHABI	T		50 BD	None	ITA-2						
BAHRAIN	M		300 BD	None	ITA-2						
MUMBAI	M		300 BD	None	ITA-2						
JEDDAH	M		300 BD	None	ITA-2						
SANA'A	T		100 BD	None	ITA-2						

**SANA'A OYSA**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
JADDAH MUSCAT	M M		9600 9600	None None	IA-5 IA-5						

**DOHA OTBD**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
BAHRAIN KUWAIT	M M		9600 100 BD	None None	IA-5 ITA-2						

**BAGHDAD ORBS**

State/Station	Cat	Current				Planned				Target date of implementation	Remarks
		Type	Signaling Speed	Protocol	Code	Type	Signaling Speed	Protocol	Code		
1	2	3	4	5	6	7	8	9	10	11	12
AMMAN BEIRUT	M M		- -	None None	IA-5 IA-5						

-----

**Modified REGISTRATION PROCEDURE for MID Region to access AMC**

(Based on IPS Working Group agreement)

The following procedure is to be used by MID States for registering users to access the European ATS Message Management center (AMC)

1. In order to carry out the procedures described in Attachment A, of State letter AN 7/49.1-09/34 each MID State/ANSP should designate three AMC Users associated to its COM Centre. One engineer, one operator and Manager of the Com Center.
2. The MID State/ANSP send the details of the above three designated users to ICAO MID Regional Office.
3. The MID State/ANSP send the above three designated users to attend the AMC training as soon as possible.
4. ICAO MID Regional Office to send the details of MID States/ANSP designated users to AMC focal point.
5. The EUROCONTROL AMC Support Team create AMC accounts for all MID users as per the ICAO MID regional Office request.
6. The EUROCONTROL AMC Support Team send account details to designated users.
7. Users start accessing start accessing the AMC using <http://www.eurocontrol.int/amc/>.
8. If any designated user of the MID State/ANSP change his post and no longer requires access to AMC the concerned States send details to cease this particular account to ICAO MID Regional office who in turn notify Eurocontrol to stop the account.
9. Creation of new account should follow step 1-7

-----

IPS WG/2

Appendix 3D to the Report on Agenda Item 3

**MID REGION AMC REGISTRATION STATUS**

STATE	NAME	ADDRESS	EMAIL	TELEPHONE	ATTENDED TRAINING	ADDRESSING STATUS	PLAN STATUS
Bahrain	Mohammed Ali	Bahrain CAA	<a href="mailto:masaleh@caa.gov.bh">masaleh@caa.gov.bh</a>	+97317321187	Y	Done	Y
	Hussain	Bahrain CAA		+97317321183			
Jordan	Muna AlNaddaf	Jordan CARC	aftn_ais@carc.gov.jo	+9626 891473	Y	Done	Y
	Majdalin Altrad				N	Done	Y
Iran	Gholam Ali Barzegari-Naeini	Iran IAC	barzegari@airport.ir	982166046645	Y	N	N
	Mohammad Esmaeili Avval	Iran IAC	amhsir@airport.ir	982166046645	Y	N	N
Saudi Arabia	Fahd Alsubhi	Saudi Arabia GACA	fahadms@gmail.com	+9662 6855611	Y	Done	Y
	Ibrahim Basheikh	Saudi Arabia GACA			N	Done	
	Modhish Algarni	Saudi Arabia GACA	modgarni@yahoo.com	(966-2) 640 5584	Y	Done	
UAE	Abdulla Alhashimi	UAE GCAA	ahashimi@szc.gcaa.ae		N	Done	Y
	Jack Watson	UAE GCAA	jwatson@szc.gcaa.ae		N	Done	Y
		UAE GCAA				Done	

-----

IPS WG/2  
Appendix 3E to the Report on Agenda Item 3

---

**AMC USER REGISTRATION FORM**

**State:** -----

**Designated AMC User Name:** -----

**Title:** -----

**Email Address:**

**Office address:** -----

**Telephone number:** -----

**Assignment Letter:** -----

**User AMC Training Status: (Attended / Required / Not Needed) -----**

-----

IPS WG/2  
Appendix 3F to the Report on Agenda Item 3

**Introduction**

This survey has been developed for the purpose of collecting information about the existing IP infrastructure between the states in-order to come with a unified IP scheme plan for the MID-Region ATN.

**General Information:**

State:	.....
Does IP network existing in place?	
<input type="checkbox"/> Yes <input type="checkbox"/> No	
Is Aviation systems connected together over IP?	
<input type="checkbox"/> Yes <input type="checkbox"/> No	
Who to contact if more details or clarification is required?	
Name:	.....
Title:	.....
Email:	.....
Telephone:	.....
Fax:	.....

**Link Specific Information:**

Please fill the following form **for each link** between you state and neighboring state within MID-Region:

1	Connection From:	State: .....	Location: .....
2	Connection To:	State: .....	Location: .....
3	Service Provider:		
4	Link Speed:	..... Kbps	
5	Link Type:	<input type="checkbox"/> Leased Circuit <input type="checkbox"/> Frame-relay <input type="checkbox"/> V-SAT <input type="checkbox"/> MPLS <input type="checkbox"/> Other .....	
6	IP version:	<input type="checkbox"/> IPv4 <input type="checkbox"/> IPv6	
7	IP Subnet:	<input type="checkbox"/> 10.____.____.____      Netmask: _____.____.____.____ <input type="checkbox"/> 172.____.____.____      Netmask: _____.____.____.____ <input type="checkbox"/> 192.168.____.____      Netmask: _____.____.____.____ <input type="checkbox"/> Other: .....      Netmask: _____.____.____.____	
8	Router	Manufacturer: ..... Model: .....	
9	Router Interfaces Supported*:	<input type="checkbox"/> Async Serial <input type="checkbox"/> Sync Serial <input type="checkbox"/> Ethernet <input type="checkbox"/> Other: .....	
10	Supported Routing Protocols*:	<input type="checkbox"/> RIP <input type="checkbox"/> OSPF <input type="checkbox"/> BGP <input type="checkbox"/> IS-IS <input type="checkbox"/> Other: .....	
11	Supported Voice Signaling on router*:	<input type="checkbox"/> SIP <input type="checkbox"/> H.323 <input type="checkbox"/> Other: .....	
12	Data Applications in	<input type="checkbox"/> AFTN <input type="checkbox"/> AMHS <input type="checkbox"/> OLDI	

	use*:	<input type="checkbox"/> Other: .....
13	Voice Applications in use*:	<input type="checkbox"/> ATC Voice <input type="checkbox"/> VHF Voice <input type="checkbox"/> Other Voice: .....
14	Data end user interface:	<input type="checkbox"/> Serial <input type="checkbox"/> IP based (Answer Below) <input type="checkbox"/> Other: .....
15	Security measures between LAN and WAN*:	<input type="checkbox"/> Single-firewall (Type: .....) <input type="checkbox"/> IPS (Type: .....) <input type="checkbox"/> Dual-firewall (Types: .....
16	Voice end user interface*:	<input type="checkbox"/> FXS/FXO <input type="checkbox"/> ISDN <input type="checkbox"/> VoIP <input type="checkbox"/> Other: .....

\* Choose all that apply

-----

IPS WG/2  
Report on Agenda Item 4

---

**REPORT ON AGENDA ITEM 4: PUBLIC INTERNET USAGE ISSUES**

4.1 The meeting noted that, IPS WG/1 meeting developed the first draft MID Region Public Internet usage strategy and guidance document furthermore IPS WG/1 agreed that the Strategy developed by IPS WG/1 to be reviewed by IPS WG/2 meeting

4.2 In this regards the meeting recalled that ICAO published Doc 9855 entitled “Guidelines on the use of Public Internet for Aeronautical Applications”, after initiating studies on the use of the public Internet for all categories of aeronautical applications (though only in the context of ground-ground communications) with due consideration to reliability, integrity, accessibility and security concerns.

4.3 The meeting recalled that IPS WG/1 concluded that:

- using the public internet should be limited for low Traffic and remote location within the State.
- No public Internet usage between International COM Centre.
- Proper security measures to be taken for the use of public internet.
- inventory on the usage of public internet in MID States is required for documentation and further research and development.
- Based on the research/studies and trails other uses could be added for the public internet usage in the MID region.

4.4 The meeting also noted that IPS WG/1 meeting was of the view that all MID States have to provide the necessary information on the inventory of the public internet usage in their State being a considerable information for the common agreement on the Public Internet usage and that a survey to be circulate to all MID States and request for urgent replies Consequently, IPS WG/1 meeting agreed the following Draft Conclusion:

*DRAFT CONCLUSION 1/6: USE OF PUBLIC INTERNET IN MID REGION*

*That MID States,*

- a) are encouraged to follow the guidance **Appendix 4D** to the Report on Agenda Item 4, when using the public internet for critical aeronautical communication; and*
- b) urgently provide the inventory on the public internet usage in their States to the ICAO MID Regional Office.*

4.5 The meeting reviewed the Strategy developed by the IPS WG/2 and produced an enhanced version which is at **Appendix 4A** to the Report on Agenda Item 4, furthermore the meeting noted that no survey was circulated and hence no single replies were received as called by the above conclusion, the meeting reiterated that survey is necessary in order to further develop the Strategy and accordingly agreed to the survey form as at **Appendix 4B** to the report on agenda item 4, and agreed to the following draft conclusion to replace and supersede IPS WG/1 Draft Conclusion 1/6.

IPS WG/2  
Report on Agenda Item 4

---

***DRAFT CONCLUSION 2/6: USE OF PUBLIC INTERNET IN MID REGION***

*That MID States,*

- a) are encouraged to follow the guidance **Appendix 4A** to the report on Agenda Item 4, when using the public internet for critical aeronautical communication; and*
- b) provide to the ICAO MID Regional Office, the inventory on the public internet usage as per **appendix 4B** to the report on Agenda item4 by date 30 April 2010.*

4.6 The meeting noted that Iran is using Public Internet via implementing its FTP server as a back up in AFTN centre on low traffic exchanging messages. The summary of actions which have been taken to fulfill this achievement and related diagrams may be itemized as follows:

- Installation of FTP server software in Tehran AFTN center.
- Installation of FTP client & TAU (exchanging messages) software for Switching Systems simultaneously.

4.7 The meeting also noted Iran expressing their readiness to assist and conduct further study/testing on the public internet usages in the MID Region so as to comply with ICAO Document 9855 in this regard the meeting again reiterated that security issues need to be very carefully studied and all required as per ICAO Doc 9855 is to be fulfilled for secure operation.

4.8 The meeting noted that in order to provide efficient service to our users, Jordan employs VPN technology to facilitate Flight Plan submission and automated collection over the public internet, where the use of the internet for Flight Plan filing reduced the manual workload of air traffic services reporting offices. Furthermore, other users at remote locations are enabled to subscribe with the AFTN/AMHS network. To achieve this service, the following actions have been taken by Jordan:

- a) Employing Risk mitigation strategy by using VPN Technology (Tunneling techniques and Encryption), Firewall device, Credential based on severity level, and Backup Internet connection.
- b) Using suppliers implementations of AFTN messaging via TCP/IP and AMHS messaging via P3 protocol.
- c) Provide appropriate training to the user.

-----

## Public Internet usage strategy and guidance

### Security and Implementation Guidelines:

- Any state willing to implement a service on the public internet must comply with ICAO document 9855.
- Internet based services must be used for low traffic, non-time critical applications where leased lines are not justifiable.
- The user of the application should expect service outages due to the nature and reliability of the public internet environment and should have a fallback procedure during the internet based service outage.
- Services to be provided via public internet can be categorized into two groups:
  - **CAT1: View only service**  
User can view only the data via internet such as AFTN messages or MET charts.
  - **CAT2: View and modify service**  
User can view and send data via the internet such as sending AFTN messages or uploading AIS documents.
- Authentication Requirements:
  - CAT1: A minimum authentication mechanism of username/password unique for each user must be provided for accessing the service over the public internet with strong password policy.
  - CAT2: A two-factor authentication must be implemented for services in this category, beside the username/password another mechanism must be used to verify the identity of the user such as certificates or smartcards.
- Authenticity and Privacy:
  - CAT1: The user must be able to verify the authenticity and integrity of the data received over the public internet by implementing industry standard protocols for message signing or secure transfer protocol (HTTPS). Encryption of the data is not mandatory.
  - CAT2: mutual authentication is required where both ends the user and the server must be able to authenticate each other using public key infrastructure (PKI) and the data must be encrypted using a minimum 128-bit.
  - Users upon registration with the internet based service must be verified by some mean.

- Network Security

- All internal systems must be protected by a dual layer enterprise class firewalls from two different vendors from the external internet environment, no direct traffic allowed from the internet into the internal systems. All traffic must be forwarded via a proxy system placed in a DMZ with strong policy (such as system update and patching, minimum running services on systems ... etc)
- Preferably systems exposed to the internet in the DMZ should have host-based intrusion prevention or a dedicated intrusion prevention system appliance.

- Logging and Auditing

- Systems exposed to the internet must be keeping a log of all transactions with the user on the public internet side and the systems in the internal network.
- Logs must be kept for a minimum period of 30 days.
- The log must contain the original message received by the server with server time-stamp and user ID if available

-----

IPS WG/2  
 Appendix 4B to the Report on Agenda Item 4

**Introduction:**

The purpose of this survey is documenting the internet use in the field of aviation in MID-region. Please fill the following survey accordingly for each aviation application that is served over the public internet

**General Information:**

<b>State:</b>	.....
<b>Does IP network existing in place?</b>	
<input type="checkbox"/> Yes <input type="checkbox"/> No	
<b>Is Aviation systems connected together over IP?</b>	
<input type="checkbox"/> Yes <input type="checkbox"/> No	
<b>Is the Aviation systems connected on a separate network from other general systems (such as email, internet)?</b>	
<input type="checkbox"/> Yes <input type="checkbox"/> No	
<b>Who to contact if more details or clarification is required?</b>	
Name:	.....
Title:	.....
Email:	.....
Telephone:	.....
Fax:	.....

**Internet for Aviation Systems Information:**

<b>Aviation Application:</b>	..... (e.g. AFTN, MET messages, Flight plans)		
<b>Type of Internet Protocol:</b>	<input type="checkbox"/> HTTP	<input type="checkbox"/> FTP	<input type="checkbox"/> SMTP
	<input type="checkbox"/> Other: .....		
<b>Who is accessing the service over the internet?</b>			
	(e.g. Remote airport, backup for conventional leased circuit) ..... .....		
<b>Internet user privileges:</b>	<input type="checkbox"/> Receive data only	<input type="checkbox"/> Send data only	
	<input type="checkbox"/> Send/Receive data	<input type="checkbox"/> Full control of service	
<b>How can you describe the class of service?</b>			
	<input type="checkbox"/> Users and operation rely on the service <input type="checkbox"/> Low traffic application with no high importance <input type="checkbox"/> Backup method in case of main system failure <input type="checkbox"/> Non-operation traffic and data only		
<b>What types of network defense measure are in use?</b>			
	<input type="checkbox"/> Single Firewall (Type: .....) <input type="checkbox"/> IPS (Type: .....) <input type="checkbox"/> Dual-layer firewall (Type: .....) 		

<input type="checkbox"/>	<input type="checkbox"/> Content-Inspection (Type:.....)
<input type="checkbox"/>	<input type="checkbox"/> Other .....
<b>Is anonymous access allowed?</b> <input type="checkbox"/> Yes <input type="checkbox"/> No	
<b>What type of user authentication is used?</b>	
<input type="checkbox"/>	<input type="checkbox"/> Username/password <input type="checkbox"/> Certificates
<input type="checkbox"/>	<input type="checkbox"/> Other: .....
<b>Is data integrity is verified?</b> <input type="checkbox"/> Yes <input type="checkbox"/> No	
<b>If yes, what type of message digest used?</b>	
<input type="checkbox"/>	<input type="checkbox"/> MD5 <input type="checkbox"/> SHA <input type="checkbox"/> Other:.....
<b>What data encryption is used if any?</b>	
<input type="checkbox"/>	<input type="checkbox"/> DES <input type="checkbox"/> 3DES <input type="checkbox"/> AES128 <input type="checkbox"/> AES256
<input type="checkbox"/>	<input type="checkbox"/> None <input type="checkbox"/> Other: .....
<b>Are the Internet links redundant?</b>	
<input type="checkbox"/>	<input type="checkbox"/> Yes <input type="checkbox"/> No
<b>Is the internet service provider accredited as mention in ICAO Doc XXXX?</b>	
<input type="checkbox"/>	<input type="checkbox"/> Yes <input type="checkbox"/> No
<b>How the Internet users connect to the aviation systems?</b>	
<input type="checkbox"/>	<input type="checkbox"/> Traffic directly routed to the aviation system (via firewall or gateway)
<input type="checkbox"/>	<input type="checkbox"/> Traffic is sent to an intermediate proxy
<input type="checkbox"/>	<input type="checkbox"/> User has to go via VPN tunnel first to reach system

-----

IPS WG/2  
Report on Agenda Item 5

---

**REPORT ON AGENDA ITEM 5: FUTURE WORK PROGRAMME**

5.1 The meeting reviewed the terms of reference (TOR) and work programme of the Working Group, taking into consideration the accomplishment of the first IPS WG meeting, the Working Group was of the view that major tasks assigned were partially completed and therefore updated its TOR and work programme as at **Appendix 5A** to the report on Agenda Item 5, to reflect the actual task and the additional tasks, that need to be completed by the IPS WG and agreed to the following Draft Decision:

***DRAFT DECISION 2/9: TERMS OF REFERENCE OF THE IPS WORKING GROUP***

*That, the Terms of Reference and Work Programme of the IPS Working Group be updated as at **Appendix 5A** to the Report on Agenda Item 5.*

5.2 The meeting was of the view that the current TOR and work programme of the IPS Working Group, focuses to the selected networking technologies in support of ATM applications for ground-to-ground communications based on the Internet Protocol suite (IPS). The meeting was of the view that the Working Group could be tasked in future to consider air-to-ground communications.

5.3 With regard to the date of the next Working Group meeting, it was agreed that, in accordance with the MIDANPIRG Procedural Handbook, and based on Terms of Reference and Action Plan of the Work Group, the IPS WG/3 meeting could be tentatively scheduled after CNS SG/3 meeting planned for may 2010, so that feedback on the work of the two meeting is received. However, the actual dates would depend on MID Regional Office workload/activities and would thus be confirmed in due course. The duration would be three (03) working days unless otherwise agreed. The venue would be Cairo, unless a State indicates an interest in hosting the meeting.

5.4 The meeting recalled that performance-based approach to planning stems from requirements associated with the results based environment that ICAO, industry and States have been steadily moving toward. The ICAO Global ATM Operational Concept (Doc 9854) provides a clear statement of the expectations of the Air Traffic Management (ATM) Community. In this regard, it was noted that eleven Key Performance Areas (KPA) have been identified in the operational concept. The meeting further noted that the Manual on Global Performance of the Air Navigation System (Doc 9883) was developed to support this approach. Doc 9883 provides a step by step approach to performance-based planning on the basis of the KPA identified in the operational concept.

5.5 In addition to the above, the meeting recalled that ICAO is transitioning to a results based approach and it is therefore, important to trace all activities and work programmes to the Business Plan (and the outputs contained therein) to ensure consistency of strategy and traceability to previously agreed global results. In this regard, the work of the Planning and Implementation Regional Groups (PIRGs) has to be justified and based on clearly established performance objectives in support of the ICAO Strategic Objectives. The methods of monitoring progress are also being revised to ensure that progress can be measured against timelines and to ensure that performance objectives are being met.

5.6 Based on the above, the meeting reviewed and updated the IPS WG Performance Framework Forms (PFF) as at **Appendix 5B** to the Report on Agenda Item 5.

5.7 The meeting agreed to the Provisional Agenda for the IPS WG/3 meeting, as at **Appendix 5C** to the Report on Agenda Item 5.

5.8 In accordance with the ICAO Business Plan and the requirements for performance monitoring, the meeting developed a follow-up action plan on the conclusions and decisions resulted from the meeting as at **Appendix 5D** to the Report on Agenda Item 5.

IPS WG/2  
Report on Agenda Item 5

---

-----

IPS WG/2  
Appendix 5A to the Report on Agenda Item 5

**TERMS OF REFERENCE**

**IPS WORKING GROUP**

**TERMS OF REFERENCE (TOR)**

To promote a globally harmonized and agreed approach to transition planning in order for MID States to work collaboratively in developing their future transition arrangements towards the ATM system envisioned in the Global ATM Operational Concept.

In accordance with the MID Region Performance, taking into consideration that the evolution from a systems-based approach to a performance-based approach should be evolutionary and consistent with the Global plan, and the MID Region activity for the usage of the public Internet and the implementation of the ATN the IPS Working Group should:

No.	Strategic Objectives	Tasks
1	D/E	Develop MID Region public Internet usage guidance and document all Internet usage with particular attention to the safety/security of the data exchanged over the public internet.
2	A/D	Complete the development of the ATN planning and implementation document to be single source material
3	D/E	Review and analyze the MID Region rationalized AFTN plan and make suggestion for the improvement in accordance with the new development in the MID Region and coordinate the AMHS implementation
4	D	Provide the necessary support for the implementation of the IPS in the MID Region (MID IPNET)

**WORK PROGRAMME**

- 1) Finalize the MID region Strategy for the usage of the public internet as per ICAO guidance and start the implementations where needed
- 2) Document public internet usage for aeronautical purpose in the MID Region.
- 3) Analyze the public internet usage for safety and security of the data exchanged.
- 4) Suggest the public internet uses in the MID Region.
- 5) Review and complete the ATN planning and implementation document for the MID Region,
- 6) Develop AMHS implementation plan for the MID
- 7) Develop AMHS and AMC implementation related materials.
- 8) Develop common specification for the MID IP Network
- 9) Review and develop if necessary the rationalized AFTN plan to be in line with the MID Region. move towards the implementations of IPS based ATN network.

**COMPOSITION**

The Group will be composed of experts nominated by MIDANPIRG Provider States

Other representatives, who could contribute to the activity of the Group, could be invited to participate as observers.

-----

IPS WG/2  
Appendix 5B to the Report on Agenda Item 5

<b>IMPROVEMENT OF COMMUNICATION INFRASTRUCTURE</b>				
<b>MID-RCI-02 - Implement communication infrastructure to support ground-to-ground voice and data communication</b>				
<b>Benefits</b>				
<b>Efficiency</b>	<ul style="list-style-type: none"> <li>Improvement in operational efficiency</li> <li>Better coordination</li> <li>Support the migration to ground-ground ATN applications</li> </ul>			
<b>Safety</b>	<ul style="list-style-type: none"> <li>Improved safety</li> </ul>			
<b>KPA</b>	<ul style="list-style-type: none"> <li>% ACHHIVED</li> </ul>			
<i>Strategy</i>				
<i>Short term (2008-2012)</i>				
<i>Medium term ( 2016)</i>				
<b>ATM OC COMPONENTS</b>	<b>TASKS</b>	<b>TIMEFRAME START-END</b>	<b>RESPONSIBILITY</b>	<b>STATUS</b>
AO, TS, CM, AUO AOM, ATMSDM	<ul style="list-style-type: none"> <li>Follow up on the implementation of the Aeronautical Fixed Services (AFS)</li> </ul>	2008-2010	ICAO, States	
	<ul style="list-style-type: none"> <li>Follow up the implementation on voice communications</li> </ul>	2008		
	<ul style="list-style-type: none"> <li>Migrate from AFTN/CIDIN to AMHS</li> </ul>	2008-		
	<ul style="list-style-type: none"> <li>Implement high speed digital circuits between main centres</li> </ul>	2008-2012	STATES	High speed digital circuits implemented at some centers
	<ul style="list-style-type: none"> <li>Monitor the implementations</li> </ul>		CNS SG	
	<ul style="list-style-type: none"> <li>Follow up the developments in the Panels</li> </ul>		CNS SG	
	<ul style="list-style-type: none"> <li>Implement the appropriate developments</li> </ul>		STATES	
	<ul style="list-style-type: none"> <li></li> </ul>			
<b>Linkage to GPIs</b>	GPI-22: Communications Infrastructure;			

IMPROVEMENT OF COMMUNICATION INFRASTRUCTURE MID-RCI-03 -Implementation of ATN in the MID region				
Benefits				
Efficiency	<ul style="list-style-type: none"> <li>Improvement in operational efficiency</li> </ul>			
	<ul style="list-style-type: none"> <li>Better coordination</li> </ul>			
Safety	<ul style="list-style-type: none"> <li>Improved safety</li> </ul>			
	<ul style="list-style-type: none"> <li></li> </ul>			
<p style="text-align: center;"><i>Strategy</i> Short term (2008-2012) Medium term (2016)</p>				
ATM OC COMPONENTS	TASKS	TIMEFRAME START-END	RESPONSIBILITY	STATUS
AO, TS, CM, AUO	<ul style="list-style-type: none"> <li>Develop Regional ATN Planning and implementation Document</li> </ul>	2008-2012	ICAO, States, IPS Working Group	
	<ul style="list-style-type: none"> <li>Review of ATN implementation problems and develop coordinated solutions</li> </ul>	2009-	IPS WG/ CNS SG	Not Started
	<ul style="list-style-type: none"> <li>Develop ATN Operation procedures</li> </ul>	2008-2010	IPS WG/ CNS SG	
	<ul style="list-style-type: none"> <li>Develop conformance procedures and check list for AMHS and ATN routers</li> </ul>		IPS WG/ CNS SG	Completed
	<ul style="list-style-type: none"> <li>Develop Information Security policy and guidance</li> </ul>	2009-		
	<ul style="list-style-type: none"> <li>Coordinate and monitor implementation to be harmonized and interoperable globally</li> </ul>			
	<ul style="list-style-type: none"> <li>Follow-up activities of panels and other regions</li> </ul>			
	<ul style="list-style-type: none"> <li></li> </ul>			
Linkage to GPIs	GPI-22: Communications Infrastructure;			

-----

IPS WG/2  
Appendix 5C to the Report on Agenda Item 5

---

**THIRD MEETING OF THE INTERNET PROTOCOL SUITE WORKING GROUP**

(IPS WG/3)

**PROVISIONAL AGENDA**

<b>STRATEGIC OBJECTIVES</b>	<b>AGENDA ITEM #</b>	<b>SUBJECTS</b>
D	1	Adoption of the Provisional Agenda
A&D	2	Follow-up on MIDANPIRG/12 and other meetings Conclusions and Decisions relevant to IPS WG TOR
A&D	3	Review of MID ATN plans and Implementation issues
A and D	4	Future Work programme
D	5	Any other business

-----

IPS WG/2  
Appendix 5D to the Report on Agenda Item 5

**FOLLOW-UP ACTION PLAN ON IPS WG/2 CONCLUSIONS AND DECISIONS**

CONCLUSIONS AND DECISIONS	FOLLOW-UP	TO BE INITIATED BY	DELIVERABLE	TARGET DATE	REMARKS
<p><b>DRAFT CONC. 2/1: MID ATN COMPATIBILITIES</b></p> <p>That,</p> <p>a) MID ATN will be IPS based and will maintain compatibility with AFTN, CIDIN and ISO/OSI based implementation and in close coordination with adjacent Region;</p> <p>b) phase out of any protocol will be based in close coordination within MID Region and with the adjacent Region; and</p> <p>c) MID States to provide periodic update to the ICAO MID Regional Office every six month.</p>	<p>CNS SG to follow-up the progress</p>	<p>IPS WG CNS SG States</p>	<p>Compatible network Updates on development in ATN from States</p>	<p>May 2010</p>	
<p><b>DRAFT DEC. 2/2: MID REGION ATN PLANNING AND IMPLEMENTATION DOCUMENT</b></p> <p>That, MID ATN Planning document be amended as at Appendix 3A to the report on Agenda Item 3 and renamed "MID Region ATN planning and Implementation Document, and that it is the IPS WG complete its development.</p>	<p>Review of the document</p>	<p>States ICAO</p>	<p>Updated ATN Planning and implementation document</p>	<p>May 2010</p>	

CONCLUSIONS AND DECISIONS	FOLLOW-UP	TO BE INITIATED BY	DELIVERABLE	TARGET DATE	REMARKS
<p><b>DRAFT CONC. 2/3: PROPOSAL FOR AMENDMENT TO CNS PART OF MID FASID</b></p> <p>That, a proposal for Amendment as contained in Appendices 3B, be issued according to established procedures to reflect updates to part IV of MID FASID DOC 9708.</p>	Amendment proposal circulation	ICAO State	Amendment proposal Updated FASID	June 2010	
<p><b>DRAFT CONC. 2/4: DIGITAL HIGH SPEED LINKS</b></p> <p>That, in support of ATN implementation, MID States are urged to continue with the implementation of digital high speed links.</p>	Implement conclusion	States	Increased no of digital links and CNS SG/3 report	May 2010	
<p><b>DRAFT CONC. 2/5: REGISTRATION TO AMC</b></p> <p>MID States designate three users to AMC and send their details to ICAO MID Regional Office as soon as possible using the format as at Appendix 3E to the report on Agenda Item 3.</p>	Concerned States to register	States	All MID States registered	May 2010	
<p><b>DRAFT CONC. 2/6: USE OF PUBLIC INTERNET IN MID REGION</b></p> <p>That MID States,</p> <p>a) are encouraged to follow the guidance <b>Appendix 4A</b> to the report on Agenda Item 4, when using the public internet for critical aeronautical communication; and</p> <p>b) provide to the ICAO MID Regional Office, the inventory on the public internet usage as per <b>Appendix 4B</b> to the report on Agenda item4 by date 30 April 2010.</p>	Implement conclusion and provide feed back	ICAO States  IPS WG	State Letter States	May 2010	
<p><b>DRAFT DEC. 2/7: TERMS OF REFERENCE OF THE IPS WORKING GROUP</b></p> <p>That, the Terms of Reference and Work Programme of the IPS Working Group be updated as at <b>Appendix 5A</b> to the Report on Agenda Item 5</p>	Follow-up work programme	IPS WG	IPS WG/3 report	May 2010	

IPS WG/2  
Report on Agenda Item 6

---

**REPORT ON AGENDA ITEM 6: ANY OTHER BUSINESS**

6.1 The meeting agreed to conduct future meeting and discussion possibly using the available net meeting technologies, in this regard the meeting agreed that the following members are able to participate in net meeting, (Bahrain, Egypt, Jordan, Saudi Arabia, Libya, Iran, Iraq) and the following members advised that they could not participate in net meeting (Syria), but the delegate indicated that they would check and revert back, within next week.

6.2 The meeting agreed to utilize the MID forum for posting issues and receiving replies in order to foster healthy discussion and get the involvement from more participants from States.

6.3 Jordan will check the possibility of hosting the AMC / and some common database on secured, website and same will be discussed during the AMC training next week with the Eurocontrol delegates and finally will be checked with all MID States if they agree.

-----

IPS WG/2  
Attachment A to the Report

**LIST OF PARTICIPANTS**

NAME	TITLE & ADDRESS
<p><b>STATES</b></p> <p><b>BAHRAIN</b></p> <p>Mr. Mohamed Ali Saleh</p>	<p>Head Aeronautical Communication Civil Aviation Affairs P.O.Box 586 KINGDOM OF BAHRAIN Fax: (973) 17 321 992 Tel: (973) 17 321 187 Mobile: (973) 3962 2202 Email: masaleh@caa.gov.bh</p>
<p>Mr. Hussain Hassan Ebrahim</p>	<p>Senior Network Engineer Civil Aviation Affairs P.O.Box 586 KINGDOM OF BAHRAIN Fax: (973) 17 321 992 Tel: (973) 17 321 183 Mobile: (973) 396 53 659 Email: hebrahim@caa.gov.bh</p>
<p><b>EGYPT</b></p> <p>Mr. Mahmoud Aly Ramadan</p>	<p>Director of AFTN/AIS/AIP/MAP Computers Ministry of Civil Aviation National Air Navigation Services Company Cairo Airport Road Cairo - EGYPT Fax: (202) 2268 5293 Tel: (202) 2265 7959 Mobile: (2010) 654 1506 Email: mahmoud.ramadan53@gmail.com</p>
<p>Mr. Mahmoud M. El Ashmawy</p>	<p>General Manager of Safety &amp; Standards of Air Navigation Facilities - ECAA Ministry of Civil Aviation Cairo Airport Road Cairo - EGYPT Fax: (202) 22268 332 Tel: (202) 2268 1347 Mobile: (2010) 332 4210 Email: engmahd@hotmail.com mahdspd@yahoo.com</p>

NAME	TITLE & ADDRESS
Mr. Ahmed Diaa Abdel Hady	Administrator Network Ministry of Civil Aviation Cairo Airport Road Cairo - EGYPT Fax: (202) 2266 437 Tel: (202) 2266 3437 Mobile: (2012) 293 0639 E-mail : ahmeddiaa23@hotmail.com
Mr. Haytham Mohamed A. El Dosouky	AFTN/AIS Engineer Ministry of Civil Aviation - NANSC Cairo Airport Road Cairo - EGYPT Fax: (202) 2268 5293 Tel: (202) 2265 7824 Mobile: (2010) 781 0781 Email: haitham.eldosoki@gmail.com
Ms. Heba Mostafa Mohamed	Supervisor AIS Ministry of Civil Aviation Cairo Airport Road Cairo - EGYPT Fax: (202) 2268 5420 Tel: (202) 2267 8882 Mobile: (2014) 147 2362 E-mail : heba.mostafal@hotmail.com
<b>ISLAMIC REPUBLIC OF IRAN</b> Mr. Gholam Ali Barzegari-Naeini	Aeronautical Messages Network Manager Iranian Airport Company (IAC) Mehrabad International Airport P.O. Box 13445 – 1558 Tehran - ISLAMIC REPUBLIC OF IRAN Fax: (9821) 6602 5101 Tel: (9821) 6604 6645 Mobile: (98912) 390 6063 Email: barzegari@airport.ir
Mr. Mohammad Esmaeili Avval	Chief of International Affairs of AFTN Iranian Airport Company (IAC) Mehrabad International Airport P.O. Box 13445 – 1558 Tehran - ISLAMIC REPUBLIC OF IRAN Fax: (9821) 6602 5101 Tel: (9821) 6604 6645 Mobile: (98912) 685 6609 Email: amhsir@airport.ir

NAME	TITLE & ADDRESS
Mr. Bahman Bagheri	Manager of Aeronautical Communication Dept Iranian Airport Company (IAC) Mehrabad International Airport P.O. Box 13445 – 1558 Tehran - ISLAMIC REPUBLIC OF IRAN Fax: (9821) 4466 5478 Tel: (9821) 6602 5408 Mobile: (98912) 243 9459 Email: bagheri_com@yahoo.com
<b>IRAQ</b> Ms. Thanaa Abdell Razek	Manager Information Technology Dept Establishment of Civil Aviation Baghdad International Airport Baghdad – IRAQ Tel: (964) 8132 471 Mobile: (964-770) 269 8245 Email: thanaa_sh@yahoo.com
Mr. Mohamed Hameed Basha	Engineer Telecommunication Department Establishment of Civil Aviation Baghdad International Airport Baghdad – IRAQ Tel: (964) 813 6000 / 200 / 100 Mobile: (964-770) 399 4951
<b>JORDAN</b> Ms. Muna Ribhi Naddaf	Head of AFTN/AIS/AMHS Maintenance Section Civil Aviation Regulatory Commission P.O. Box 7547 Postal 11110 Amman - JORDAN Fax: (962-6) 489 1653 Tel: (962-6) 489 1473 Mobile: (962-77) 939 5224 Email : aftn_ais@carc.gov.jo
Mr. Yasir Ziad	AFTN/AMHS Engineer Civil Aviation Regulatory Commission P.O. Box 7547 Postal 11110 Amman - JORDAN Fax: (962-6) 489 1653 Tel: (962-6) 489 1473 Mobile: (962-79) 578 1882 Email : aftn_sup@carc.gov.jo

NAME	TITLE & ADDRESS
<b>LIBYA</b> Mr. Abdurrazag Indeir	Chief of AFTN Maintenance Unit Civil Aviation Authority P.O. Box 14399 Tripoli - LIBYA Fax: (218-21) 563 2338 Tel: (218-21) 5630 414 Mobile: (218-91) 320 3247 Email : amindeir@yahoo.com
<b>SAUDI ARABIA</b> Mr. Abdullah Ahmed Bin Saleh	Computer Networking Engineer General Authority of Civil Aviation Air Navigation Services P.O.Box 15441 Jeddah 21444 KINGDOM OF SAUDI ARABIA Fax: (966-2) 671 9041 Ext 1550 Tel: (966-2) 671 7717 Mobile: (966-50) 484 3757 Email: abs2000@maktoob.com
Mr. Hani Abdullah Gari	Software Engineer General Authority of Civil Aviation Air Navigation Services P.O.Box 15441 Jeddah 21444 KINGDOM OF SAUDI ARABIA Fax: (966-2) 671 9041 Tel: (966-2) 671 7717 Ext 1226 Mobile: (966-50) 370 3772 Email: garihani@hotmail.com
Mr. Mohammed Al-Zahrani	Communication General Authority of Civil Aviation Air Navigation Services P.O.Box 15441 Jeddah 21444 KINGDOM OF SAUDI ARABIA Fax: (966-2) 671 9041 Tel: (966-2) 671 7717 Ext 1226 Mobile: (966-50) 664 8318 Email: al_7areri@hotmail.com

NAME	TITLE & ADDRESS
<p><b>SYRIA</b> Mr. Bassam Mahmoud</p>	<p>Chief of AFTN Center Syrian Civil Aviation Authority Al Najma Square P.O.Box 6257 Damascus - SYRIA Fax: (963-11) 540 0571 Tel: (963-11) 5400 172 Mobile: (963) 933498142 E-mail: bassammahmoud@gmail.com</p>
<p>Eng. Ola Sameer Faraj</p>	<p>Computer Engineer Syrian Civil Aviation Authority Al Najma Square P.O.Box 6257 Damascus - SYRIA Fax: (963-11) 540 0571 Tel: (963-11) 540 0172 Mobile: (963) 955 721 379 Email: ola_faraj@hotmail.com</p>
<p>Mr. Samir Hamdi Abou Chameh</p>	<p>Chief of AFTN/AIS Maintenance Syrian Civil Aviation Authority Al Najma Square P.O.Box 6257 Damascus - SYRIA Fax: (963-11) 540 0571 Tel: (963-11) 540 0344 Mobile: (963) 9448 35356 Email: samirsham@yahoo.com</p>
<p><b>SITA</b> Dr. Atif Sharaf</p>	<p>ATM Business Development Manager Middle East and North Africa P.O. Box 8360 Jeddah 21482 KINGDOM OF SAUDI ARABIA Fax: (966-2) 644 9338 Tel: (966-2) 642 1861 Mobile: (966-50) 220 0773 Email: atif.sharaf@sita.aero</p>