



International Civil Aviation Organization

Annual Safety Report Team (ASRT)

Third Meeting (ASRT/3)
(Cairo, Egypt, 20-22 November 2018)

Agenda Item 1: Adoption of the Provisional Agenda and Election of the Rapporteur

PROVISIONAL AGENDA AND ELECTION OF THE RAPPORTEUR

(Presented by the Secretariat)

SUMMARY

This paper presents the Provisional Agenda for the Third meeting of the Annual Safety Report Team (MID-ASRT/3) for adoption and calls for the election of the ASRT/3 Rapporteur.

Action by the meeting is at paragraph 3.

REFERENCES

- State Letter Ref.: ME 4/1.1–18/302 of 19 September 2018
- RASG-MID Procedural Handbook

1. INTRODUCTION

1.1 The Provisional Agenda for the Third meeting of the Annual Safety Report Team (MID-ASRT/3) was circulated to States and concerned International Organizations as an attachment to the MID Regional Office Invitation Letter Ref.: ME 4/1.1–18/302 dated 19 September 2018, as shown in **Appendix A**.

1.2 In accordance with the RASG-MID Procedural Handbook, the Annual Safety Report Team (ASRT) Rapporteur should be elected from Member States or from an ASRT International Organization/Industry (Partners).

2. DISCUSSION

2.1 The meeting may wish to note that Ms. Rose Al Osta, Manager, Safety & Flight Operations Africa & Middle East, IATA indicated that she is no longer able to assume the function of ASRT.

3. ACTION BY THE MEETING

3.1 The meeting is invited to:

- a) elect a Rapporteur for the ASRT/3; and
- b) review and adopt the Provisional Agenda at **Appendix A**.

APPENDIX A

THIRD MEETING OF THE MID ANNUAL SAFETY REPORT TEAM

(MID-ASRT/3)

(Cairo, Egypt, 20 – 22 November 2018)

PROVISIONAL AGENDA

Agenda Item 1: Adoption of the Provisional Agenda and Election of Rapporteur

Agenda Item 2: Work Programme

- State's presentation on the Safety Data Collection and Analysis
- Seventh MID Annual Safety Report
 - Review and analysis of data
 - Identification of Focus Areas and Emerging Risks
 - Identification of root causes and contributing factors

Agenda Item 3: Future Work Programme

Agenda Item 4: Any other Business

-END-



International Civil Aviation Organization

MID Annual Safety Report Team

Second Meeting (MID-ASRT/3)
(Cairo, Egypt, 20 – 22 November 2018)

Agenda Item 2: Work Programme

FOLLOW-UP ON THE RSC-MID/6 CONCLUSIONS AND DECISIONS

(Presented by the Secretariat)

<p>SUMMARY</p> <p>This paper presents the status of the RSC-MID/6 Conclusions and Decisions and the follow-up actions taken by the concerned parties.</p> <p>Action by the meeting is at paragraph 3.</p>
<p>REFERENCES</p> <p>- RSC-MID/6 Report</p>

1. INTRODUCTION

1.1 The RSC-MID/6 meeting was held at the ICAO Middle East Regional Office in Cairo, Egypt, 25 – 27 June 2018. The meeting adopted 6 Conclusions and 4 Decisions.

2. DISCUSSION

2.1 An updated follow-up action plan on RSC-MID/6 Conclusions and Decisions is at **Appendix A**.

3. ACTION BY THE MEETING

3.1 The meeting is invited to note the status and follow-up actions on the outcome of RSC-MID/6 meeting and take actions, as appropriate.

APPENDIX A

FOLLOW-UP ON RSC/6 CONCLUSIONS AND DECISIONS

CONCLUSIONS AND DECISIONS	CONCERNS/ CHALLENGES (RATIONALE)	DELIVERABLE/ TO BE INITIATED BY		TARGET DATE	STATUS/REMARKS
<p>RSC DECISION 6/1: MID-ASRT TERMS OF REFERENCE (TORS)</p> <p>That, the Terms of Reference (TORs) of the MID Annual Safety Report Team (MID-ASRT) be revised as at Appendix 3B.</p>	<p>Revised terms of Reference for ASRT</p>	<p>Reviewed and endorsed by the RSC/6</p>		<p>April 2019</p>	<p>Completed</p>
<p>RSC DECISION 6/2: SIXTH MID ANNUAL SAFETY REPORT</p> <p>That, the Final version of the Sixth Edition of the MID Annual Safety Report (ASR) be published on the ICAO MID website.</p>	<p>Sharing the final 6th MID-ASR for the period 2012-2016</p>	<p>MID-ASR 6th Ed published on the ICAO website</p>		<p>June 2018</p>	<p>Completed</p>
<p>RSC CONCLUSION 6/3: REVISED RASG-MID SAFETY ADVISORY (RSA-11) SAFEGUARDING OF AERODROMES .</p> <p>That, the revised RASG-MID Safety Advisory on Aerodrome Safeguarding (RSA-11) at Appendix 3N, which includes Aerodrome Safeguarding Toolkit is endorsed</p>	<p>Obstacles control on the aerodrome and in its vicinity</p>	<p>RSA on Aerodrome safeguarding</p>	<p>Egypt</p>	<p>June 2018</p>	<p>Completed</p> <p>Posted on the ICAO MID website in June 2018.</p>

CONCLUSIONS AND DECISIONS	CONCERNS/ CHALLENGES (RATIONALE)	DELIVERABLE/ TO BE INITIATED BY		TARGET DATE	STATUS/REMARKS
<p>RSC CONCLUSION 6/4: SURVEY ON AEP/ARFF LEVEL OF IMPLEMENTATION</p> <p><i>That,</i></p> <p>a) <i>a survey on ARFF/AEP level of implementation be carried out; and</i></p> <p>b) <i>the results of the survey be presented to the RGS WG/5 meeting for further course of actions</i></p>	<p>- Effectiveness of Aerodrome Emergency Planning and the operability of the ARFF services at International Aerodromes</p>	<p>Questionnaire on AEP/ARFF Level of Implementation</p>	<p>Egypt supported by Saudi Arabia and UAE</p>	<p>Dec. 2017</p>	<p>Ongoing</p>
<p>RSC CONCLUSION 6/5 : AERODROME APRON MANAGEMENT AND GROUND HANDLING SERVICES</p> <p><i>That,</i></p> <p>a) <i>an Advisory Circular be developed on Aerodrome Apron Management; and</i></p> <p>b) <i>a Seminar on Ground Handling be organized and hosted by UAE and supported by ICAO, IATA and Ground Handlers in 2019.</i></p>	<p>- Ground Handling operations are a source of significant personnel safety and aircraft/equipment damage concerns</p>	<p>Advisory Circular on Aerodrome Apron Management Safety</p>	<p>UAE supported by Egypt and Saudi Arabia</p>	<p>June 2018</p>	<p>Ongoing</p>

CONCLUSIONS AND DECISIONS	CONCERNS/ CHALLENGES (RATIONALE)	DELIVERABLE/ TO BE INITIATED BY		TARGET DATE	STATUS/REMARKS
<p>RSC CONCLUSION 6/8: REVISED RASG-MID SAFETY ADVISORY ON WILDLIFE HAZARDS MANAGEMENT AND CONTROL (RSA-13)</p> <p><i>That, the revised RASG-MID Safety Advisory on WHMC (RSA-13) at Appendix 3Q, which includes the WHMC Plan Template is endorsed.</i></p>	<p>Effectiveness of Wildlife Hazards Management and Control</p>	<p>RSA on Wildlife Hazards Management and Control</p>	<p>Sudan supported by UAE and Egypt</p>	<p>Sep 2017</p>	<p>Completed</p> <p>Posted on the ICAO MID website in June 2018.</p>
<p>RSC DECISION 6/9: ESTABLISHMENT OF THE AIG CORE TEAM</p> <p><i>That, the AIG Core Team composed of the following experts, is established to develop the Roadmap and to monitor the implementation of the Strategy for the enhancement of Regional Cooperation in the provision of AIG function for the MENA States:</i></p> <p><i>Eng. Ismaeil Mohamed Al Hosani (Chairman)</i> <i>Mr. Ibrahim Addasi from UAE</i> <i>Mr. Abdulelah O. Felemban from Saudi Arabia</i> <i>Mr. Kamil Ahmed Mohammed from Sudan</i> <i>Mr. Theeb Abdullah Al Otaibi from Saudi Arabia</i> <i>Mr. Seyed Mohammad Hosein Mousavi Sajad from Iran</i> <i>Mr. M'barek Lfakir, from Morocco</i> <i>Mr. Mohamed Chakib from ICAO</i> <i>Mr. Mohamed Rejeb from ACAO</i></p>	<p>Develop road map and to monitor the implementation</p>				<p>Completed</p>

CONCLUSIONS AND DECISIONS	CONCERNS/ CHALLENGES (RATIONALE)	DELIVERABLE/ TO BE INITIATED BY		TARGET DATE	STATUS/REMARKS
<p>RSC CONCLUSION 6/10: RSA ON GNSS VULNERABILITIES</p> <p><i>That, States and stakeholders be invited to review the Draft Safety Advisory at Appendix 4E; and provide comments/inputs to the ICAO MID Office before 15 September 2018, in order to consolidate the final version for endorsement by the RASG-MID/7 meeting.</i></p>		State Letter	ICAO	July 18	<p>Ongoing</p> <p>SL ME4/1-18-230 dated 19 July 2018 <i>(Replies: Bahrain & IATA)</i></p>
<p>DRAFT CONCLUSION 6/1: ROADMAP FOR AIG REGIONAL COOPERATION</p> <p><i>That, the Roadmap for AIG Regional Cooperation at Appendix 3U is endorsed.</i></p>	States level 1 of implementation	State Letter	ICAO	30 Sep 2018	<p>Completed</p> <p>SL Ref.: ME 4/1.3-18/074 dated 4 March 2018 <i>(Replies: Bahrain, Egypt, Iran, Morocco, Saudi Arabia, Sudan, UAE and Yemen)</i></p>



International Civil Aviation Organization

MID Annual Safety Report Team

Second Meeting (MID-ASRT/3)
(Cairo, Egypt, 20 – 22 November 2018)

Agenda Item 2: Work Programme

REVIEW OF THE SEVEN MID ANNUAL SAFETY REPORT

(Presented by the Secretariat)

SUMMARY

This paper presents the Seventh Draft Edition of MID Annual Safety Report with the analysis of the accidents and incidents data, and identification of the key Focus Areas and related contributing factors in the MID Region, for review by the ASRT 3 meeting.

Action by the meeting is at paragraph 3.

REFERENCES

- Draft Edition of 7th Annual Safety Report

1. INTRODUCTION

1.1 The MID Annual Safety Report Team (MID-ASRT) was established through Decision 1/3 of the Regional Aviation Safety Group (RASG-MID/1) meeting, which was held in Cairo, Egypt, 18-19 September 2011.

1.2 The objective of the RASG-MID Annual Safety Report is to gather safety information from different stakeholders and to identify the main aviation safety risks in the Middle East Region in order to deploy mitigation actions for enhancing aviation safety in a coordinated manner.

2. DISCUSSION

2.1 The safety information presented in the Seventh Edition of the Annual Safety Report is based on the compilation and analysis of data provided by: the International Air Transport Association (IATA) and the International Civil Aviation Organization (ICAO), airline operators, and States.

2.2 The Annual Safety Report will be covered in the **PPT/1**.

3. ACTION BY THE MEETING

3.1 The meeting is invited to:

- a) review and update as deemed necessary, the Draft version of the 7th MID-ASR at **Appendix A**, in order to be presented to the RASG-MID/7 meeting for endorsement; and
- b) urge States and all Stakeholders to provide necessary safety data to the MID-ASRT for the development of the next Edition of the Annual Safety Report.



ICAO

Regional Aviation Safety Group – Middle East (RASG-MID)
Seventh Edition, xxx 2019

This document is disseminated under the sponsorship of the Regional Aviation Safety Group – Middle East (RASG-MID) in the interest of information exchange. The RASG-MID assumes no liability for its contents or use thereof.



Contents

1.	Foreword	- 3 -
2.	Executive Summary	- 3 -
3.	Traffic Volumes	- 4 -
4.	Reactive Safety Information.....	- 5 -
4.1	Safety Risk Assessment Methodology	- 5 -
4.2	ICAO Data	- 7 -
4.2.1	MID State of Occurrence.....	- 8 -
4.2.2	MID State of Registry and Operator.....	- 13 -
4.2.3	ICAO In-depth Analysis of Accidents	- 20 -
4.3	IATA Data.....	- 23 -
4.3.1	Regional Accidents Rates (Per million departures)	- 23 -
4.4	MID Region Safety Performance - Safety Indicators-Reactive.....	- 29 -
5.	Proactive Safety Information	- 30 -
5.1	ICAO USOAP-CMA	- 30 -
	<i>Incident data provided by the MID States for the period (2015-2017)</i>	- 31 -
5.2	IATA IOSA and ISAGO	- 31 -
5.2.1	IATA Operational Safety Audit (IOSA)	- 31 -
5.2.2	IATA Safety Audit for Ground Operations (ISAGO)	- 34 -
5.3	Incidents Reported by Airlines - STEADES Data	- 34 -
5.4	Region Safety Performance - Safety Indicators-Proactive.....	- 37 -
6.	Predictive Safety Information	- 38 -
6.1	State Safety Programme (SSP)	- 38 -
6.2	IATA Safety Data.....	- 38 -
6.3	MID Region Safety Performance – Safety Indicators – Predictive	- 39 -
7.1	Identification of Focus Areas for MID Region.....	- 40 -
7.2	Identification of emerging risks for MID Region	- 42 -

8. Final Conclusions - 43 -

Appendix A: List of Acronyms - 44 -

Appendix B: Go- Around..... - 45 -

1. Foreword

The Regional Aviation Safety Group-Middle East (RASG-MID) was established in September 2011 to develop an integrated, data driven strategy and implement a work program that supports a regional performance framework for the management of safety.

RASG-MID supports the implementation of the ICAO Global Aviation Safety Plan (GASP) and the achievement of the Safety Targets in the MID Region Safety Strategy. The RASG-MID membership includes representatives from ICAO, MID States, and international organizations.

RASG-MID consists of three main teams; the Annual Safety Report Team (ASRT), the Regional Aviation Safety Team (RAST), and the Safety Support Team (SST). The Annual Safety Report Team (ASRT) is in charge of collecting and analysing safety information. The Team is also responsible for the identification of the safety focus areas and the production of the RASG-MID Annual Safety Report (ASR).

The RASG-MID Annual Safety Report is a timely, unbiased and transparent source of safety related information essential for all aviation stakeholders interested in having a tool to enable sound decision-making on safety related matters.

2. Executive Summary

Over the last five years, the global scheduled commercial international operations accounted for approximately 36.3 million departures in 2017, compared to 31.3 million departures in 2013. The MID Region showed a stable growth in traffic volumes. Total scheduled commercial departures in 2017 accounted approximately for 1.37 million departures compared to 1.08 million departures in 2013. In terms of aircraft accident, the MID Region had an accident rate of 1.45 accidents per million departures in 2017, which decreased compared to 2.3 in 2016. The MID Region accident rate in 2017 is decreased compared to the global accident rate (2.4 accidents per million departures).

However, the 5-year average accident rate for 2013-2017 is 2.67, which is equal to the global average rate for the same period. The average rate of fatal accidents in the MID Region for the period (2013-2017) is 0.64 accident per million departures, compared to 0.44 for the globe. The MID Region had no fatal accidents in 2013, and 2017. However, three fatal accidents occurred in 2014, 2015 and 2016. The 2014 accident caused 38 fatalities, 224 fatalities were registered in 2015 and 1 fatality in 2016.

Based on the analyses of all accidents, serious incidents, and incidents data, it is concluded that the Focus Areas for the MID Region are:

1. Runway Safety (RS)- (mainly RE and ARC during landing);
2. Loss of Control Inflight- (LOC-I);
3. Controlled Flight Into Terrain- (CFIT); and
4. Mid Air Collision- (MAC)

New emerging risks have been identified, as follows:

1. Security risks with impact on safety-SEC;
2. Fire/Smoke-non impact- (F-NI);
3. Runway Incursion- (RI);
4. Birdstrike- (BIRD); and
5. Wake Turbulence (Vortex).

The regional average overall Effective Implementation (EI) in the MID Region (13 out of 15 States have been audited) is 73.24 %, which is above the world average 66.27% (as of 10 October 2018). Three (3) States are currently below EI 60%.

The EI by Area (e.g. Operations, Airworthiness) shows that all areas are above 60% EI, which reflect the improvement in the oversight capabilities particularly in the area of ANS and AGA. With respect to the Critical Elements (CEs), CE4 (Qualified technical personnel) still represents the lowest with 56.89% EI, whereas CE8 (resolution of safety issues) is also below EI 60% (56.84).


Implementation of SSP is one of the main challenges faced by States in the MID Region. The RASG-MID addresses the improvement of SSP implementation in the MID Region as one of the top Safety Enhancement Initiatives (SEIs). Currently, States in the MID Region could not reach to full implementation of the SSP framework. Common challenges/difficulties have been identified based on the States feedback and recommendations for the way forward were provided in this regard.

Several activities took place to support the implementation of SSP/SMS, including the new ICAO Safety Management Training Programme (SMTP), Workshops, Safety Summits and meetings in order to address the challenges and difficulties, as well as sharing of experiences and best practices.

3. Traffic Volumes

Global Traffic


The global scheduled commercial international operations accounted for approximately 36.3 million departures in 2017, compared to 31.3 million departures in 2013.

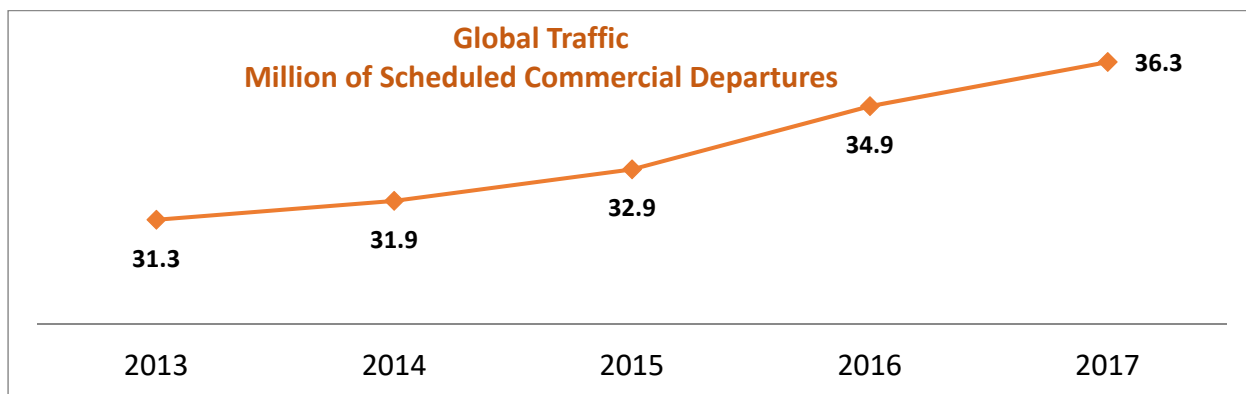

Graph 1: Global Traffic Volume (Source iSTARSA of 8 Oct 218)

MID Traffic

The MID Region shows a stable growth in traffic volumes. Total scheduled commercial departures in 2017 accounted approximately for 1.37 million departures compared to 1.08 million departures in 2013.

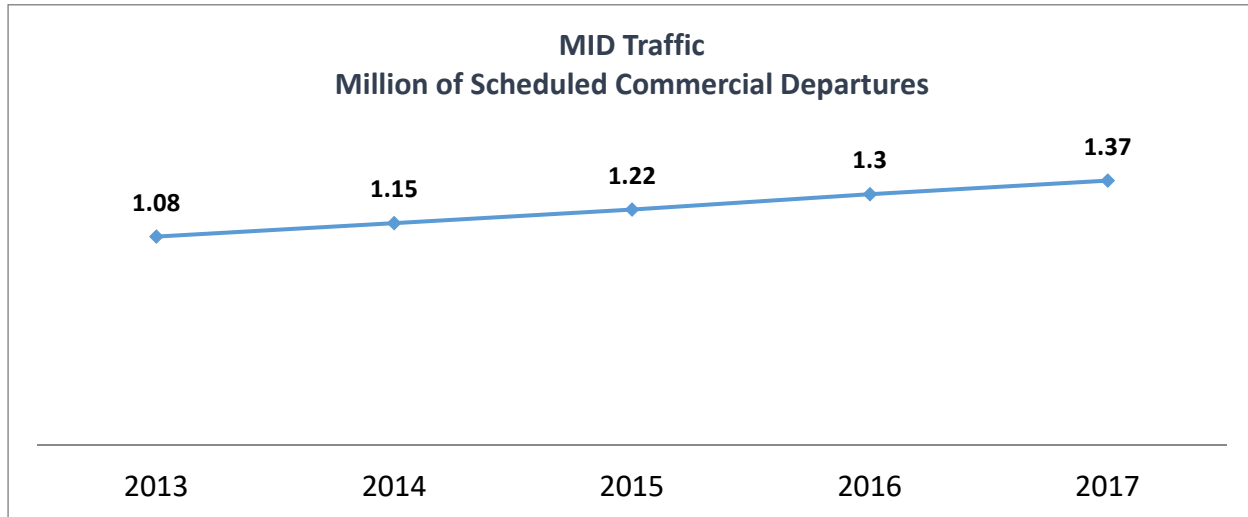

Graph 2: MID Traffic Growth (Source iSTARSA of 8 Oct 218)

4. Reactive Safety Information

4.1 Safety Risk Assessment Methodology

In order to facilitate the identification and prioritization of the main Regional Risk Category Focus Areas (FAs), accidents and serious incidents are categorized in terms of frequency and severity. The severity assessment is based on the fatalities, injuries and damage to aircraft, property and equipment. (For Frequency rating: 1 is the most frequent and 6 is the least frequent. For Severity: 1 is the most severe and 4 is the least severe)

The MID ASRT/2 meeting (Cairo, Egypt, 4-5 February 2018) agreed to the following improvements to the methodology used for risk assessment:

- a) *improvement of the current risk matrix used for the identification of focus areas (four (4) levels of severity instead of three (3)), as follows:*

improvement of the current risk matrix used for the identification of focus areas (four (4) levels of severity instead of three (3)), The level of severity is categorized as follows:

- 1) Catastrophic: multiple deaths; serious damage to aircraft/equipment (destroyed)
- 2) Major: serious injury/fatalities; major aircraft/equipment damage
- 3) Minor: little consequences (minor injuries, minor damage to aircraft);
- 4) No potential damage or injury

Frequency \ Severity	1	2	3	4	5	6
1	1	2	3	4	5	6
2	2	4	6	8	10	12
3	3	6	9	12	15	18
4	4	8	12	16	20	24

b) Adoption of the “feared consequences” of the risk portfolio of DGAC France:

The Table below shows that each identified Undesirable event/safety issue is linked to the potential accident outcome.

Nb	Identification of Undesirable Event	Potential Accident outcome						
		CFIT	LOC-I	MAC	Ground Collision	RE	Damage to aircraft or injury inflight	Damage to aircraft or /injury on ground
UE1	Unstabilised or non-compliant approach	X	X			X		X
UE2	Abnormal airplane attitude (Roll, pitch, speed...)		X				X	
UE3	Events relating to aerodrome conditions (Runway surface condition and aerological parameters)		X			X	X	X
UE4	En-route encounter of dangerous weather phenomena (Thunderstorm, turbulence, Icing)		X	#			X	X
UE5	Misuse of aircraft system (Weight and Balance, speed track, aircraft config)	X	X	X	X	X	X	X
UE6	Event pertaining to works/maintenance operations on or close to a runway		#		X	X		X
UE7	Bad coordination/execution of ground operations (deicing, loading, stowing, line maintenance, etc)	X	X		X		X	X
UE8	Runway/taxiway incursion				X	X		X
UE9	Loss of separation in flight/ and/or airspace infringement /level bust		X			X	X	X
UE10	Wildlife hazard, including bird strike		X		X	X	X	
UE11	Ground-onboard interface failure (Misunderstanding, unsuitability of transmitted information,etc)	X	X	X	X	X	X	X
UE12	Aircraft maintenance event	X	X		#	X	X	X
UE13	Fire/Smoke inflight	#	X				X	X
UE14	Aircraft system failure resulting in flight management disturbance	X	X		#	X	X	X
UE15	Loss of cabin pressure		X	#			X	
UE16	Aircraft damage due to FOD		X			X	X	X

4.2 ICAO Data

ICAO's primary indicator of safety in the global air transport sector is the accident rate based on scheduled commercial operations involving aircraft having a Maximum Take-off Weight (MTOW) above 5700 kg. Exposure data is comprised of scheduled commercial operations that involve the transportation of passengers, cargo and mail for remuneration or hire, and is a preliminary estimate solely for the calculation of the accident rates.

ICAO iSTARS (ADREP et al and API Data service.) applications contain an aggregation of different accident and incident data sources including ADREP, Aviation Safety Network and Aviation Herald to provide official ICAO accident statistics used for the development of the ICAO Safety Reports.

Note: The accident and serious incidents data presented here is the official ICAO accident statistics, used for the development of the ICAO safety reports. The data is based on scheduled commercial operations involving aircraft having a Maximum Take-off Weight (MTOW) above 5700 kg (validated or under validation by ICAO).

The main part of this Section provides analysis of the accidents that occurred in the MID Region (State of Occurrence) for the period (2013-2017), which is used for monitoring the progress of achieving the Safety Targets in the MID Region Safety Strategy.


In addition, it provides data analysis regarding accidents and serious incidents of aircraft registered in the MID Region (State of Registry) as well as for the MID air operators (State of the Operator) using the same criteria mentioned above. It is to be highlighted that the State of registry and State of operator Section focuses mainly on counts and percent distribution (no rates).

4.2.1 MID State of Occurrence


Accidents Rates and Fatalities

The Graph 3 shows that the MID Region had an accident rate of 1.45 accidents per million departures in 2017, which decreased compared to the previous year (2016). However, the 5-year average accident rate for 2013-2017 is 2.67, which is equal to the global average rate for the same period.

The Graph 4 shows that 16 accidents occurred in the MID Region during the period (2013-2017), whereas (442) accidents occurred globally.

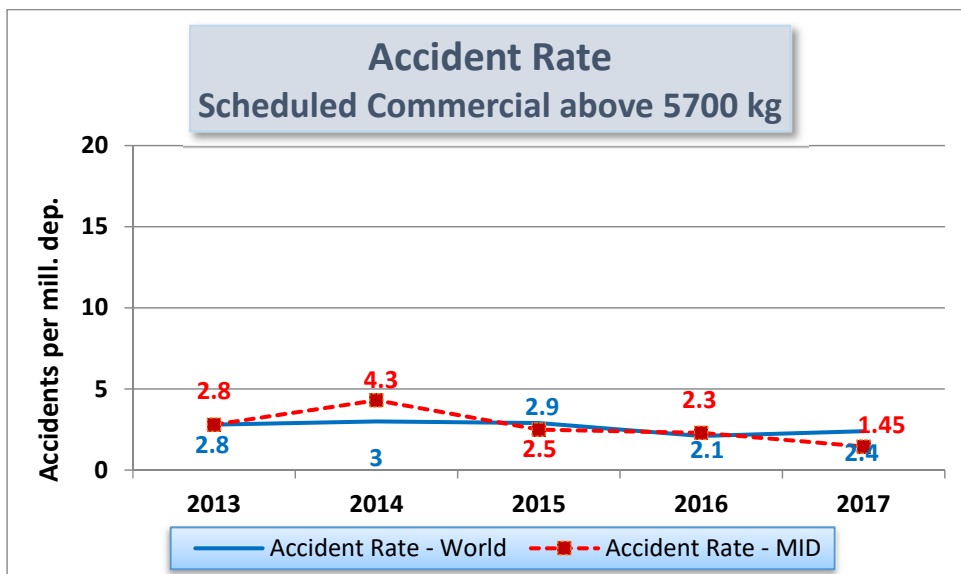


Graph 3: Global Accident Rate Vs MID Accident Rate (Source iSATRS as of 10 Oct 2018)

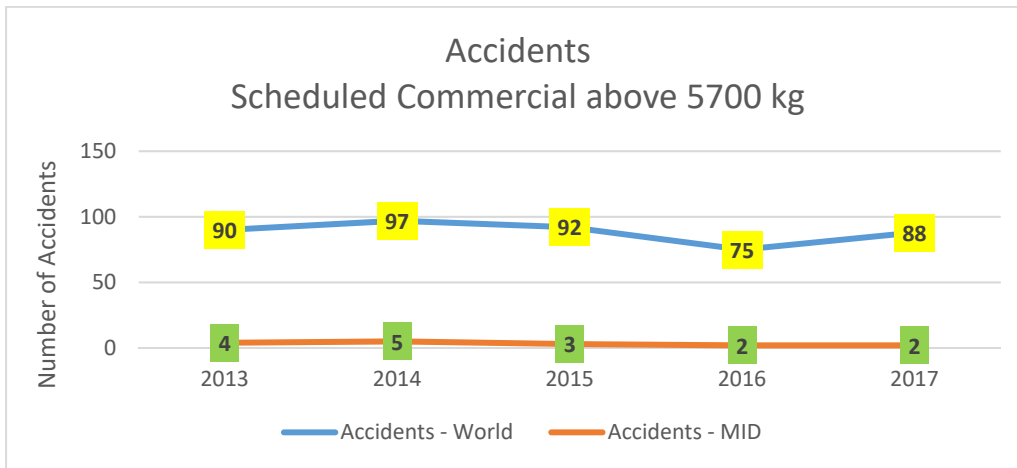


Graph 4: Number of MID Accidents Vs. Number of Global Accidents Per Year (Source: iSTARsAs of 8 Oct 2018)

The Graph 5 shows that the average rate of fatal accidents in the MID Region for the period (2013-2017) is 0.64 accident per million departures, compared to 0.44 for the globe. The MID Region had no fatal accidents in 2013 and 2017. However, three fatal accidents occurred in 2014, 2015 and 2016. The 2014 accident caused 38 fatalities, 224 fatalities were registered in 2015 and 1 fatality in 2016 as shown in Graph 6.

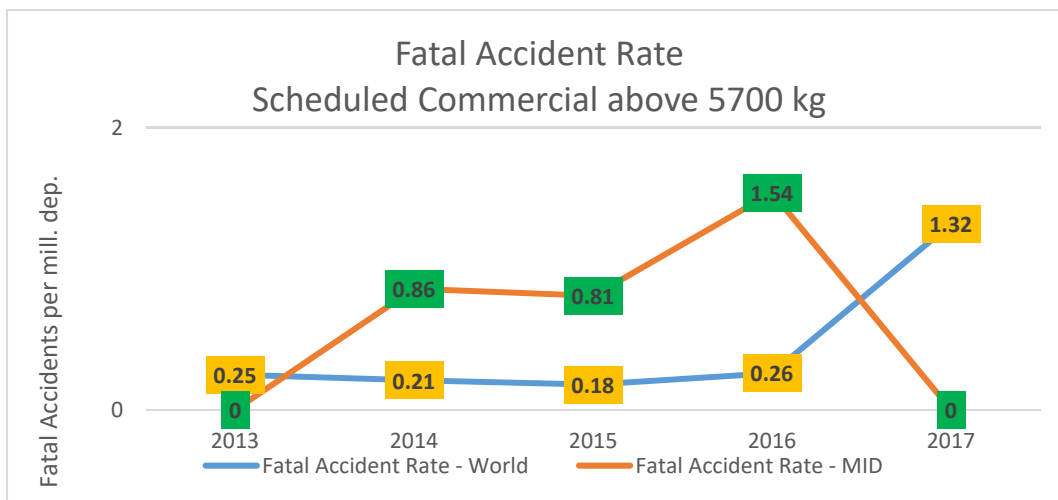


Graph 5: Global Fatal Accident Rate Vs MID Fatal Accident Rate (Source: iSTARsAs of 8 Oct 2018)

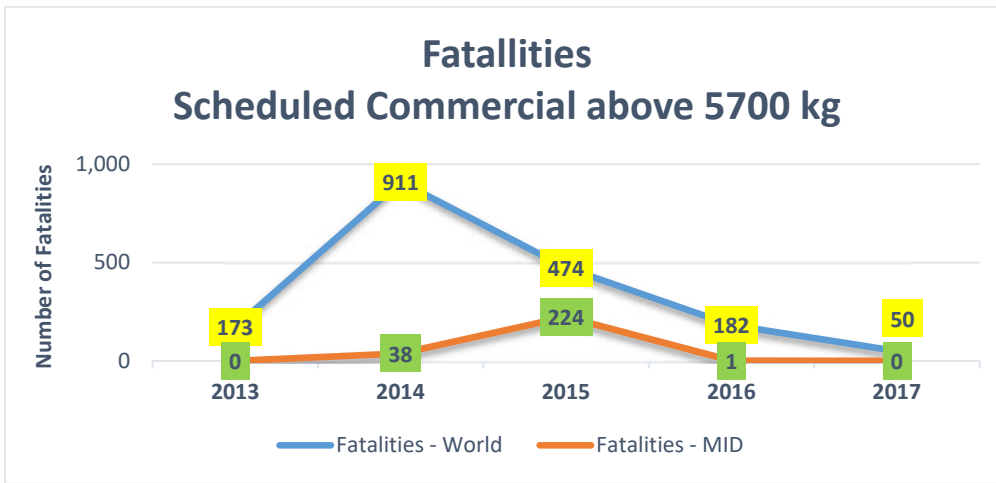

Graph 6: Number of MID Fatalities Vs. Global Fatalities (Source: iSTARS as of 8 Oct 2018)


The Graph 7 shows that 16 accidents occurred during the period of 2013-2017 and no fatal accident occurred during the year of 2017. Three fatal accidents occurred respectively during 2014, 2015, and 2016.

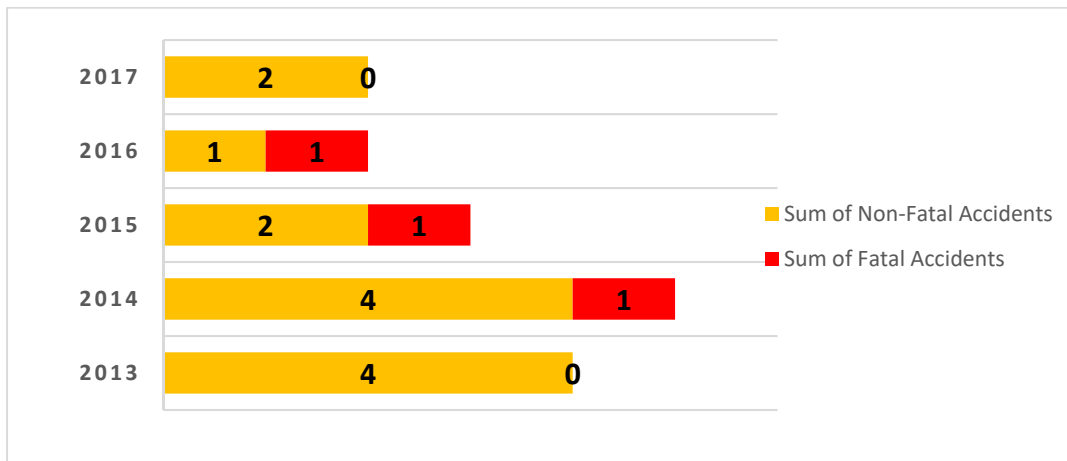

Graph 7: Number of Fatal Accidents Vs Non-Fatal Accidents Per Year (2013-2017) (Source: iSTARS as of 8 Oct 2018)

Occurrence Category


The Graph 8 indicates that during the period (2013-2017), the LOC-I and CFIT accidents have not been reported. However, the engine failure/malfunction (SCF-PP), Non-Power plan (SCF-NP), runway excursion (RE), abnormal runway contact (ARC), and security (SEC) events represent the main areas of concern.

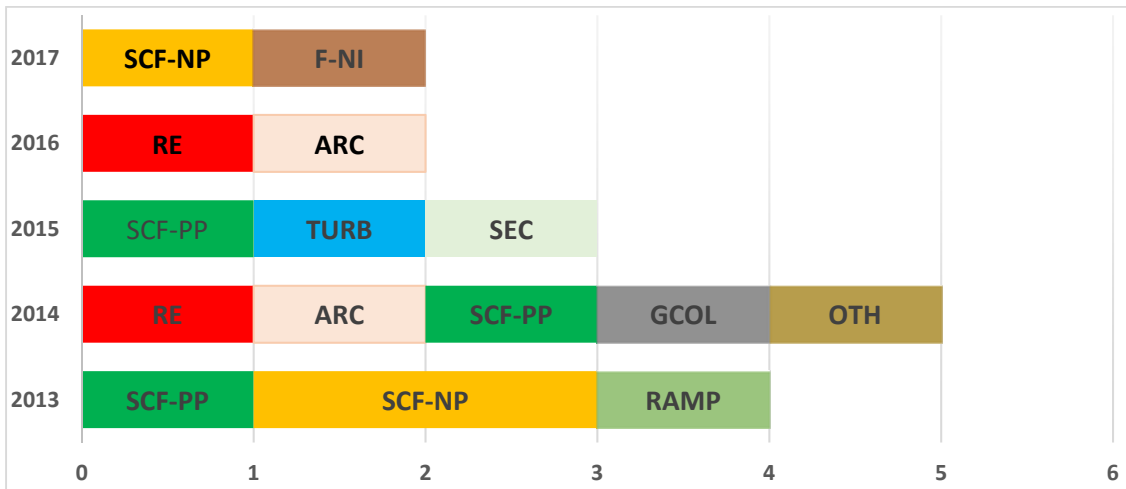

Graph 8: Distribution of Occurrence Category Per Year (2013-2017) (Source: iSTARS as of 8 Oct 2018)


Phase of Flight

The Graph 9 shows that the majority of accidents occurred during landing phase of flight. The majority of Abnormal Runway Contact (ARC) and Runway Excursion (RE) events took place during landing flight phase. However, one abnormal runway contact accident took place during landing (Go-around) flight phase. The engine failure/malfunction events occurred during take-off and En-route flight phases.

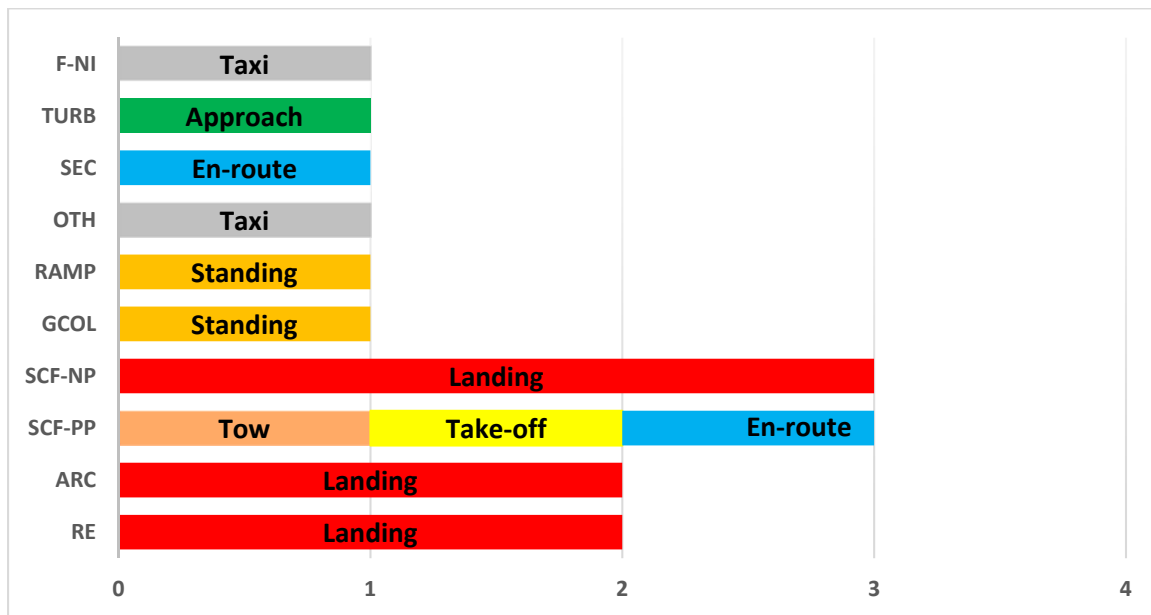


Graph 9: Distribution of Occurrence Category Per Phase of Flight (2013-2017) (Source: iSTARs as of 8 Oct 2018)

The Graph 10 shows that most of the accidents categories experienced during the 2013-2017 were the system component failures, followed by Runway Excursion and abnormal runway contact.

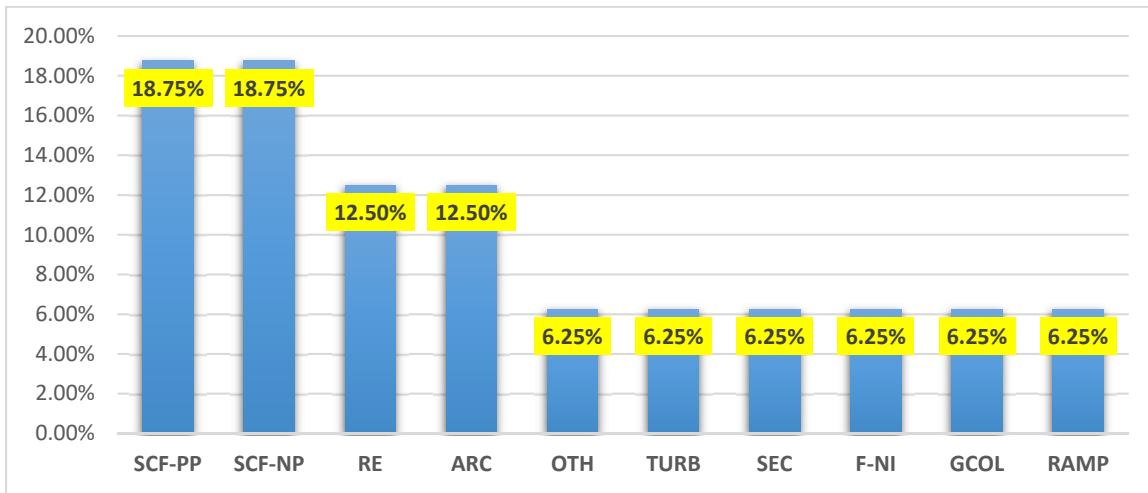

Graph 10: Occurrence Category Distribution as Percentage Per Accident (Source: iSTARs as of 8 Oct 2018)

The Graph 11 shows that the fatalities for the period 2013-2017 were associated to the following Occurrence Categories: Security (SEC), engine failure/malfunction (SCF-PP) and Abnormal Runway Contact (ARC).

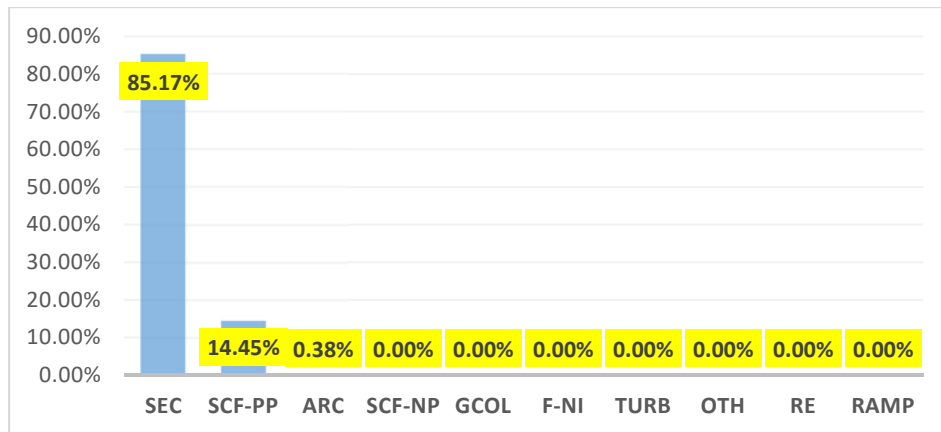

Graph 11: Fatalities Distribution as Percentage by Occurrence Category (2013-2017) (Source: Istars as of 8 Oct 2018)

Taking a more in-depth look at the fatal accidents and accidents for the MID Region (State of occurrence) for the period 2013-2017, the following observations are made:

- a) In terms of fatality, the top three fatal accidents categories in the MID Region are:
1. Security – SEC;
 2. System Component Failure- Power Plant - (SCF-PP); and
 3. Runway Safety-Abnormal Runway Contact – (RS/ARC).

b) In terms of frequency, the most frequent accidents categories in the MID Region (State of occurrence) are:

1. Runway Safety (RS) – including (RE, ARC, GCOL, and RAMP);
2. System Component Failure – Power Plant (SCF-PP);
3. System Component Failure– Non-Power Plant (SCF-NP);
4. Fire/Smoke (F-NI); and
5. Turbulence Encounter (TURB)

Identification of the main Risk Areas based on the analysis of accident data related to the State of Occurrence (2013-2017)

To facilitate the identification of the safety priority areas; the safety risk assessment methodology is applied. Applying the “feared consequences” of the risk portfolio of DGAC France, the system component failure- Power Plant fatal accident has led to the potential outcome of Loss of control inflight, consequently, the SCF-PP was considered under the risk of loss of control-inflight.

Main Risk Area	Frequency	Severity	Risk Level
Runway Safety (RS)	1	3	3
Loss of Control-Inflight (LOC-I)	3	1	3
Security (SEC)	3	1	3


Therefore, the safety risk areas according to the State of occurrence’s accidents data are

- a) Loss Of Control -Inflight – (LOC-I);
- b) Security related-(SEC); and
- c) Runway Safety (RS): Runway Excursion (RE) and Abnormal Runway Contact (ARC) during landing


4.2.2 MID State of Registry and Operator

Accident Data Analysis

The Graph 12 shows the change in the number of Fatal Accidents and non-Fatal Accidents over the last five years involving MID State of registry and State of operator airplanes. The Graph 12 also indicates that no fatal accident was recorded during 2017, which indicated a decreased number of fatal accidents in 2017 compared to the previous years. Three fatal accidents occurred in 2016 involving MID Operators. In terms of fatalities, the Graph 13 shows that the four fatal accidents, which occurred in 2014 and 2016, resulted in 167 fatalities.

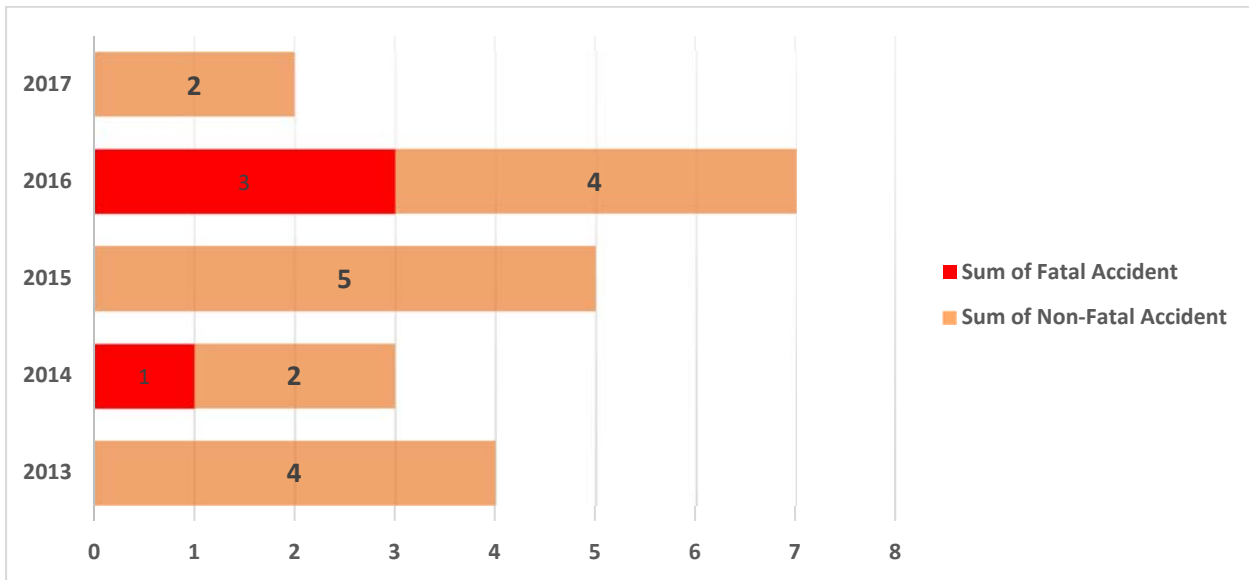


Graph 12: Number of Fatal and Non-Fatal Accidents per Year (2013-2017) (Source: iSTARsAs of 8 Oct 2018)

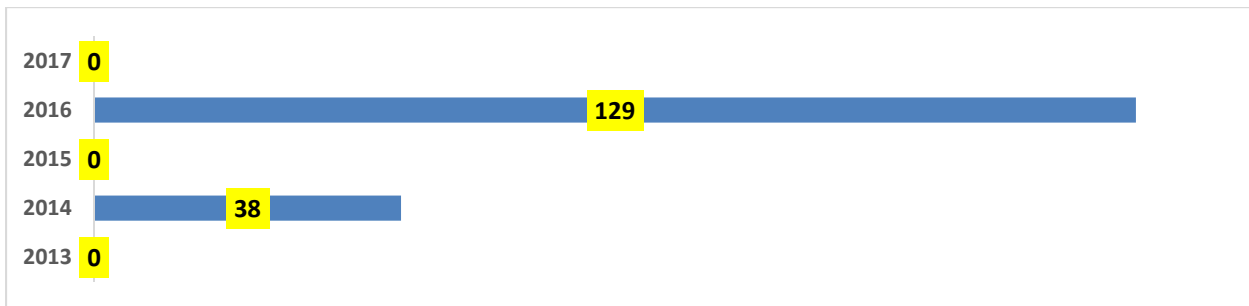

Graph 13: Number of Fatalities per Year (2013-2017) (Source: iSTARsAs of 8 Oct 2018)

Phase of Flight

The Graph 14 shows that the majority of accidents related to Runway Excursion, Abnormal Runway Contact, and system component failure- Non-power plant (mainly landing gears technical problems) occurrence categories took place during landing flight phase. It was also noted that the engine failure/malfunction-related accident occurred during take-off (initial climb) phase of flight. Regarding, Loss of Control Inflight (LOC-I), it took place during approach (Go-around) flight phase.

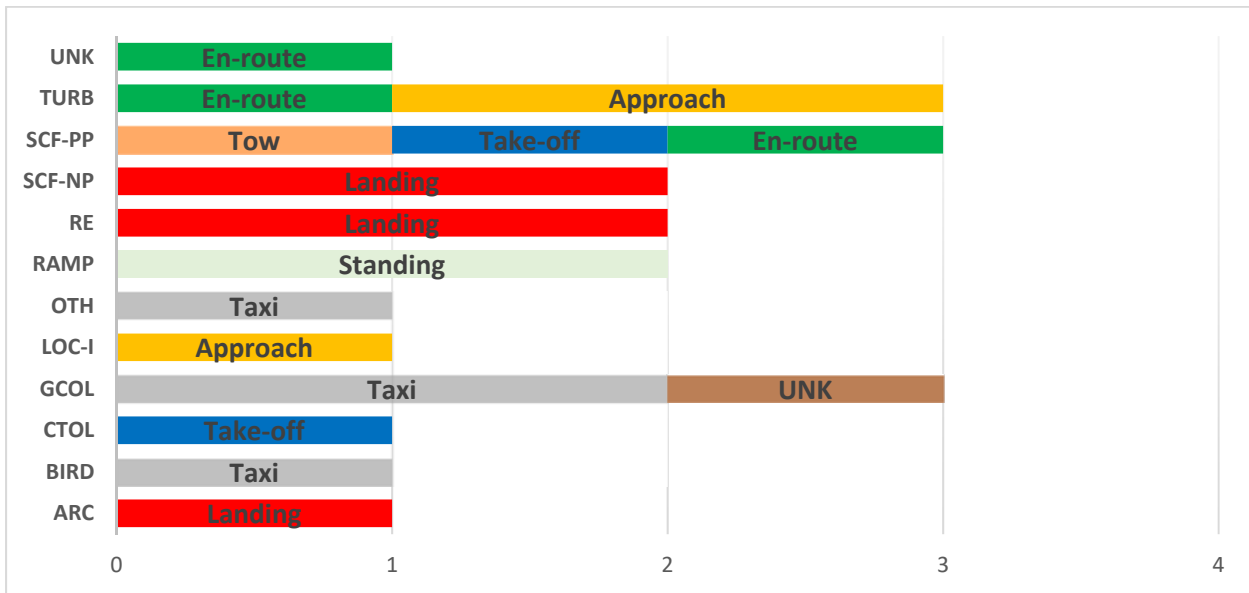


Graph 14: Distribution of the Number of Accidents Category per Phase of Flight (2013-2017) (Source: iSTARsAs of 8 Oct 2018)

During 2013-2017, two fatal accidents took place during approach (go-around-GOA) phase of flight (For further analysis on the Go-Around procedures see the **Appendix B**). Therefore, En-route, Go-around (GOA), and Initial Climb (ICL) represent the most critical flight phases in the MID Region.


Occurrence Category

The Graph 15 shows the percentage of fatalities associated with the accident Categories for the period 2013-2017: Unknown (UKN), Loss of Control in flight (LOC-I), engine failure/malfunction (SCF-PP) and Abnormal Runway Contact (ARC).

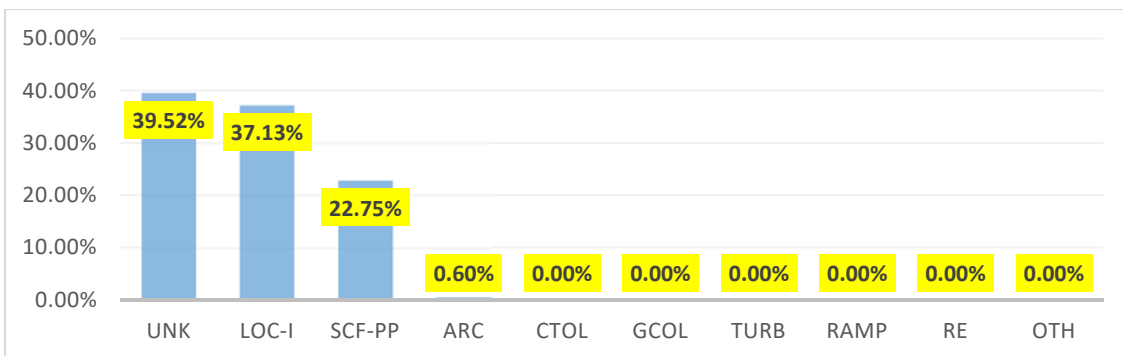


Graph 15: Fatalities Distribution as Percentage by Occurrence Category (2013-2017) (Source: iSTARsAs of 8 Oct 2018)

The Graph 16 shows that most of the accidents categories experienced during the period 2013 - 2017 were the engine failure/malfunction (SCF-PP), followed by Turbulence and Ramp. However, considering that RE, GCOL, RAMP, BIRD, CTOL and ARC are all considered part of the Runway Safety (RS) Risk Category, RS is still the most frequent. One LOC-I occurrence had resulted in fatalities. Regarding “Unknown” occurrence category, the causal factors of the accident are still under investigation and thus the occurrence category could not be defined at this stage.

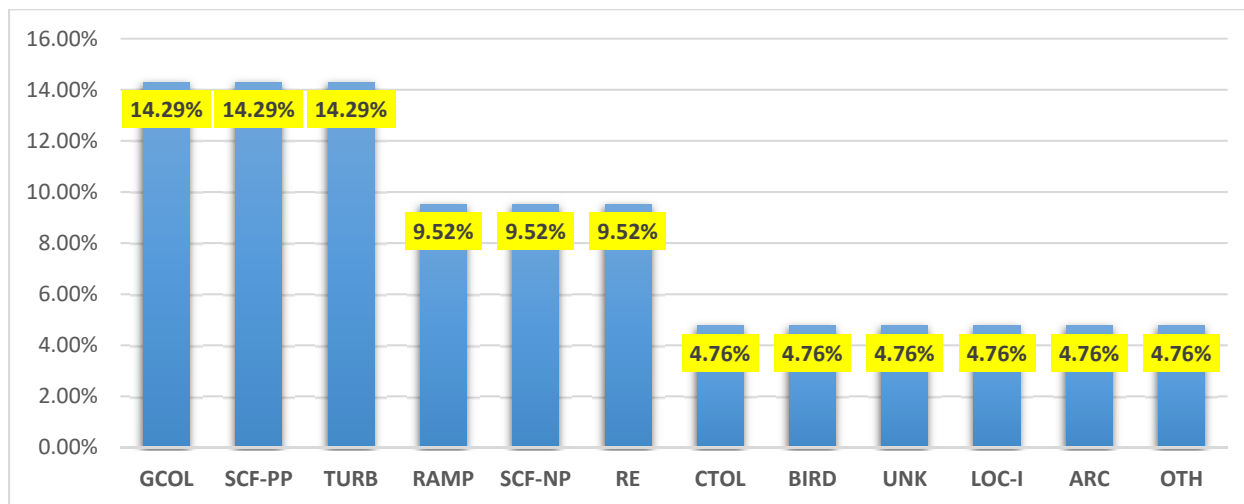

Graph 16: Accident Distribution as Percentage per Occurrence Category (2013-2017) (Source: iSTARsAs of 8 Oct 2018)

During 2013-2017, no CFIT accident occurred. However, one LOC-I accident had taken place during 2016. Engine failure/malfunction (SCF-PP), Runway Excursion (RE), Abnormal Runway Contact (ARC), and Turbulence (TURB) events were registered and are still prevailing.

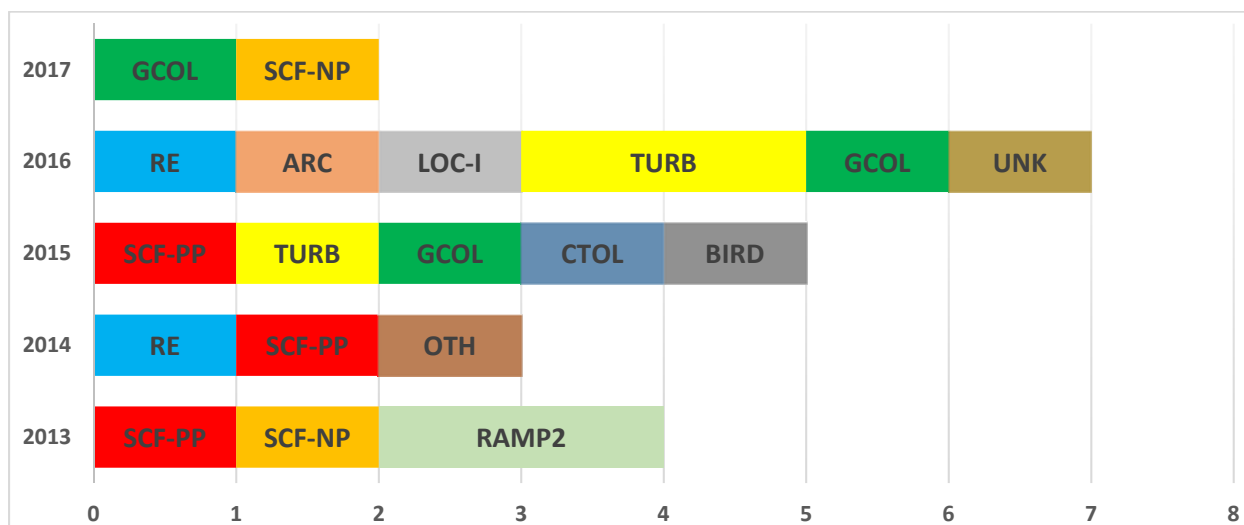

Graph 17: Accident Category Distribution per Year(Source: iSTARsAs of 8 Oct 2018)

Taking a more in-depth look at the fatal and non-fatal accidents for the MID Region (State of registry and State of operator) for the period 2013-2017, the following is to be highlighted:

- a) In terms of fatality, the fatal accidents categories in the MID Region for the period 2013 – 2017 are:
 - 1. Unknown (UNK);
 - 2. Loss Of Control- In-flight (LOC-I);
 - 3. System Component Failure – Power Plant (SCF-PP); and
 - 4. Runway Safety – Abnormal Runway Contact (ARC).

- b) In terms of frequency, the most frequent accidents categories in the MID Region (State of registry and State of occurrence) for the period 2013 – 2017 are:
 - 1. Runway Safety (RS) – (RE, ARC, GCOL, RAMP, CTOL, BIRD);
 - 2. System Component Failure-Power Plant (SCF-PP);
 - 3. Turbulence encounter – (TURB); and
 - 4. System Component Failure- non-power plan (SCF-NP).

Identification of the main Risk Areas based on the analysis of safety data related to the State of registry and State of operator (2013-2017)


To facilitate the identification of the safety priority areas; the safety risk assessment methodology is applied. Applying of the “feared consequences” of the risk portfolio of DGAC France, the system component failure- Power Plant fatal accident has led to the potential outcome of Loss of control inflight, consequently, the SCF-PP was considered under the risk of loss of control-inflight. Therefore, the safety risk areas according to the State of registry and operator accidents data are:

Main Risk Area	Frequency	Severity	Risk Level
Runway Safety (RS)	1	3	3
Loss of Control-Inflight (LOC-I)	2	1	2
System Component Failure- non power plan (SCF-NP)	2	5	10
Turbulence (TURB)	3	4	12

- a) Runway Safety (RS): Runway Excursion (RE) and Abnormal Runway Contact (ARC) during landing;
- b) Loss of Control-Inflight (LOC-I).

Serious Incidents Data Analysis


The Graph 18 shows that there was no reported serious incidents during the year of 2017 compared to the previous years.

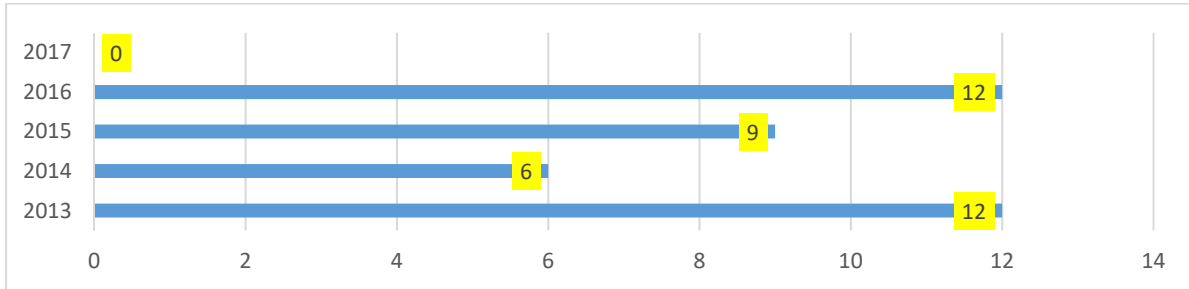

Graph 18: Number of Serious Incidents per Year (2013-2017)

Phase of Flight


The Graph 20 shows that the majority of Runway Excursion and Abnormal Runway Contact occurrence categories took place during landing flight phase. It was also noted that the engine failure/malfunction events occurred during take-off flight phase.

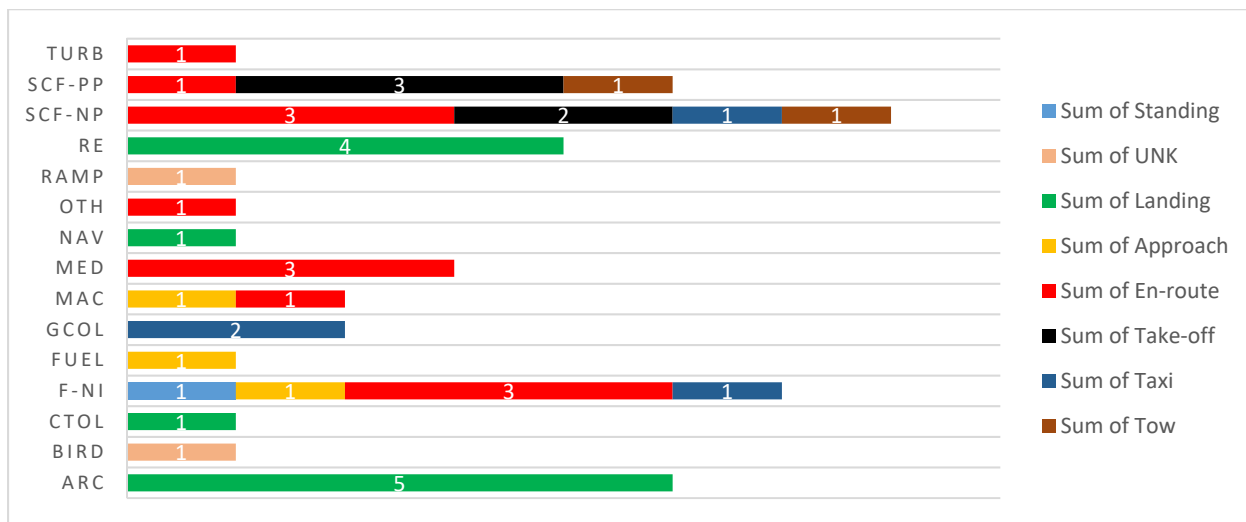

Graph 19: Distribution the Number of Serious Incidents Category per Phase of Flight (2013-2017)

Occurrence Category

The Graph 20 shows that most of the serious incident categories experienced during the period 2013 - 2017 were the system component failures (PP and NP combined), followed by Runway Excursion and abnormal runway Contact, and the fire/smoke categories. The near midair collision events have been recorded, but took place outside the MID Region airspace.

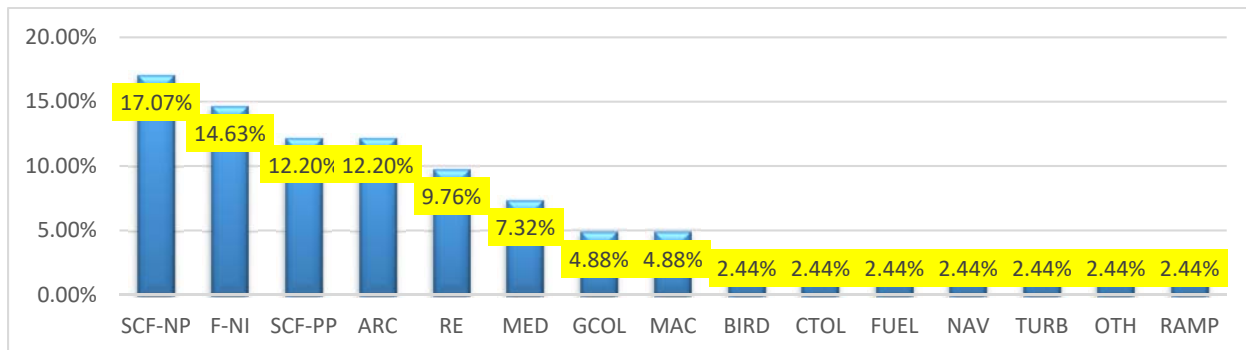


Graph 20: Serious Incidents Distribution as Percentage per Occurrence Category (2013-2017)

Taking a more in-depth look at the serious incidents for the MID Region (State of registry and State of operator) for the period 2013-2017, the following is to be highlighted:

- a) In terms of frequency, the most frequent serious incidents categories in the MID Region are:
1. Runway Safety (RS) – (RE, ARC, GCOL, RAMP, BIRD) ;
 2. System Component Failure (SCF)- (SCF-PP and SCF-NP);
 3. Fire/smoke- (FN-I);
 4. Medical (MED);
 5. Near Mid Air Collision (NMAC);
 6. Turbulence (TURB); and
 7. Fuel.

Total number of serious incidents provided by the MID States for the period 2015-2017.

The data shows that there was a significant increase on the number of NMAC Occurrences. The number of serious incidents data shared by the MID States have been considered and included in the analysis to shed light and identify the potential safety concerns in the MID region. However further data analysis should be provided by the MID States for an in-depth analysis.

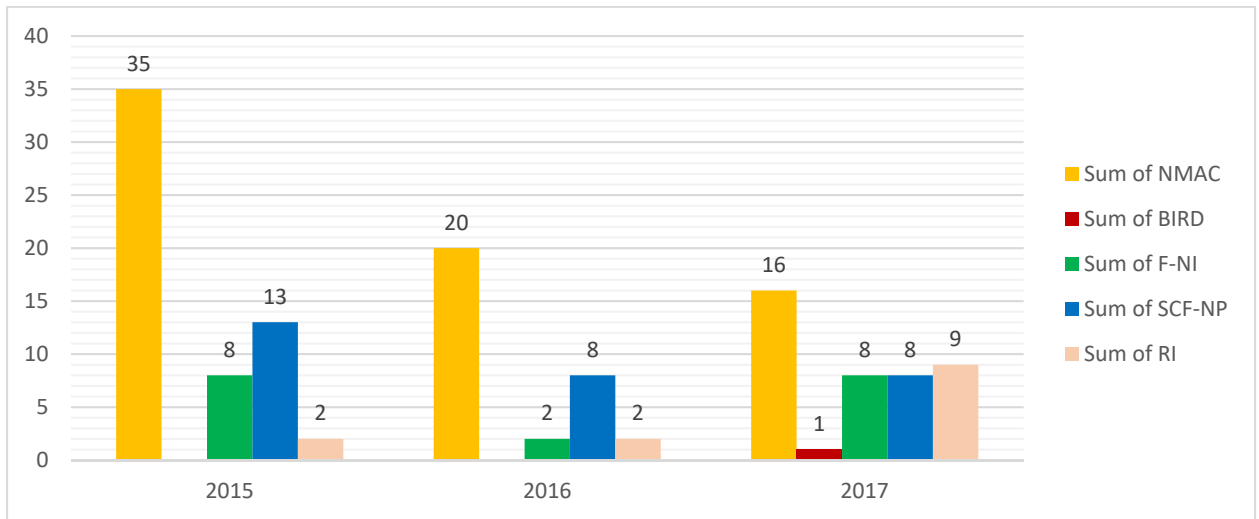

Graph 21: Number of Serious Incidents Distribution Per Year (2015-2017)

Taking a more in-depth look at the serious incidents reported by the MID Region for the period 2015-2017, the following is to be highlighted:

- b) In terms of frequency, the most frequent serious incidents categories in the MID Region are:
1. Near Mid Air Collision (NMAC);
 2. System Component Failure (SCF)- (SCF-NP);
 3. Runway incursion- (RI)
 4. Fire/smoke- inflight- (FN-I);
 5. Birdstrike- (BIRD)

4.2.3 ICAO In-depth Analysis of Accidents

A. Runway Excursions and Abnormal Runway Contact: During 2013-2017, Runway Excursions and abnormal runway contact accidents and serious incidents mainly occurred in the landing phase of flight and counted for approximately 1% of fatality. This focus area covers the risk of runway excursions, including the direct precursors such as hard landings, high speed landing, landings following an un-stabilized approach. The MID Region continued improvement in runway safety, which is one of the industry's principal risk areas.

Root Cause Analysis

1. Latent Conditions:
 - i. Ineffective safety management system
 - ii. Incomplete/inefficient operator SOP
 - iii. Deficient flight crew training
 - iv. Regulatory oversight

2. Threat:
 - i. Decision to make a landing on short runway with tailwind.
 - ii. Poor judgment and continued landing after an un-stabilized approach
 - iii. Improper calculating of landing speed without focusing on the tailwind component
 - iv. Technical failures Pilot information
 - v. Contaminated runways
 - vi. Airport facilities including poor runway paintings/markings
 - vii. Meteorology

3. Errors:
 - i. Timely crew decisions (very low-level go-arounds)
 - ii. Failed to go around after un-stabilized approach
 - iii. SOP Manual not updated and maximum tailwind not mentioned
 - iv. Manual handling/flight controls
 - v. Contaminated runways

4. Contributing factors:
 - i. Anti-skid failures of landing gear causing prolong landing distance.
 - ii. Instantaneous variable wind condition on aerodrome traffic pattern.
 - iii. Late activation of airbrakes and spoilers (especially airbrakes) with tailwind cause to increase the landing roll distance.

Some of the Precursors, which could Lead to Runway Excursion

1. Precursors for aircraft overrunning the end of the runway on landing (landing overrun)
Precursors could include: Long landing / high across threshold / extended flare / floating, incorrect performance calculation, ineffective use of stopping devices / time to apply reverse thrust or braking / inappropriate use of auto brake setting, weather related / runway condition / aquaplaning, unsterilized approach, tailwind landing.

2. Precursors for aircraft veering off the side of the runway during landing (landing veer-off)
Precursors could include: Crosswind and wet /contaminated runway, hard landing / inappropriate use of stopping devices / asymmetric braking or reverse thrust, inappropriate use of nose wheel steering.

B. SCF-PP: Engine Failure or malfunction of an aircraft system or component. The engine failure/malfunction contributed to the accidents and serious incidents and counted for 23% of fatalities. The majority of SCF-PP accidents and serious incidents between 2013 and 2017 occurred mainly during take-off and en-route phase of flight, with one fatal accident involving turboprop aircraft.

Root Cause Analysis

1. Latent Conditions:
 - i. Regulatory oversight
 - ii. Deficient maintenance standard operating procedures
 - iii. Ineffective safety management system
 - iv. Insufficient resource availability
 - v. Deficiencies in the evaluation to monitor changes

2. Threats:
 - i. Improper Airworthiness Directive implementation and Control
 - ii. Poor maintenance and errors related to aircraft dispatch or release
 - iii. Lack of information sharing and support from the State of manufacturer
 - iv. Embargo on aircraft equipment/Spare parts acquisition
 - v. Incorrect or incomplete aircraft performance limitations verification
 - vi. Errors related to the Aircraft Flight Maintenance adherence
 - vii. Extensive/uncontained engine failure
 - viii. Incorrect/Unclear aircraft maintenance manual

3. Errors:
 - i. Crew inadequate aircraft handling
 - ii. Crew SOP Adherence / SOP Cross-verification
 - iii. Improper weight and balance calculations

4. Contributory Factors
 - i. CAMOs' and AMO organization's responsibilities and communication issue
 - ii. Non-compliance with the regulator operational requirements
 - iii. Ineffective monitoring in operators line maintenance
 - iv. Inadequate monitoring in operations, training and technical divisions

C. Loss of Control-Inflight: During 2013-2017 Aircraft upset or loss of control only contributed to one accidents but counted for around 37% of fatalities. During the year 2016, the LOC-I occurred during go around (GOA) phase of flight.

Root Cause Types

The below root-cause analysis is based mainly on industry's analysis of the LOC-I accidents:

1. Latent Conditions:
 - i. Inadequate safety management system including the use of the FDM data
 - ii. Regulatory oversight
 - iii. Incomplete/Inefficient Flight operations
2. Threats:
 - i. Inappropriate Flight Crew Automation training
 - ii. Type-rating related issues on complex and highly automated aircraft
 - iii. Contained engine/power plant malfunction
 - iv. Severe turbulence, Thunderstorms, wind shear/Gusty wind
 - v. Poor visibility/IMC conditions
 - vi. Spatial disorientation/Somatogravic illusion
 - vii. Flt Crew misdiagnose the problem leading to the application of an incorrect recovery procedure
 - viii. Lack of exposure to the required maneuvers during normal line flying operations
 - ix. Limitations in simulator fidelity could lead to pilots not having the manual flying skills required to recover from some loss of control scenarios.
3. Errors:
 - i. Inappropriate/Incorrect use of Automation by flight crew
 - ii. Inadequate flight crew monitoring skills/awareness or communication
 - iii. Flt Crew mishandling of manual flight path and/or speed control
 - iv. Abnormal checklist
 - v. Incorrect recovery technique by flight crew when their aircraft has become fully stalled.

4. Contributory Factors:
 - i. Unnecessary weather penetration
 - ii. Operation outside aircraft limitations
 - iii. Unstable approach
 - iv. Vertical/lateral speed deviation

5. Direct Precursors to a Loss of Control Event:
 - i. Deviation from flight path
 - ii. Abnormal airspeed or triggering of stall protections


4.3 IATA Data

To calculate the regional accident rates, IATA determines the accidents based on the State of operator. Moreover, the operator’s country is specified in the operator’s Air Operator Certificate (AOC). For example, if a French-registered operator has an accident in the MID Region, this accident is counted as “European” accident as far as regional accident rates are concerned.

Moreover, the IATA accidents database captures operational accidents for aircraft with maximum take-off weight (MTOF) >5,700 KG, which happen during a commercial operation – operation including flights listed as a scheduled or unscheduled, passenger or cargo flight, or positioning flights). Non-operational accidents are excluded (military, human relief, test flights, training, etc.). The data below captures accident information for the time period 2013 – 2017 and is narrowed down to the MID States.


4.3.1 Regional Accidents Rates (Per million departures)

5 years accident rate 2.89

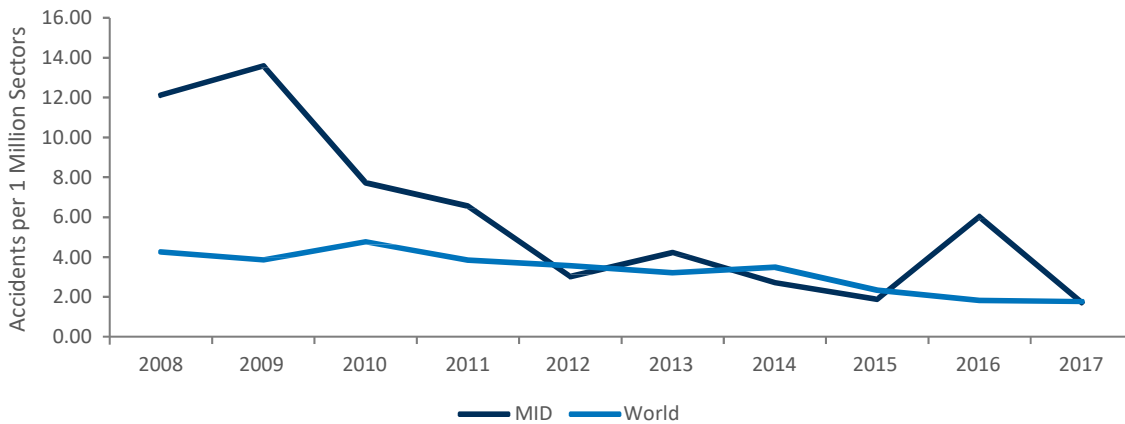

Regional Fatal Accident Rates (Per million departures)


5 years fatal accident rate??

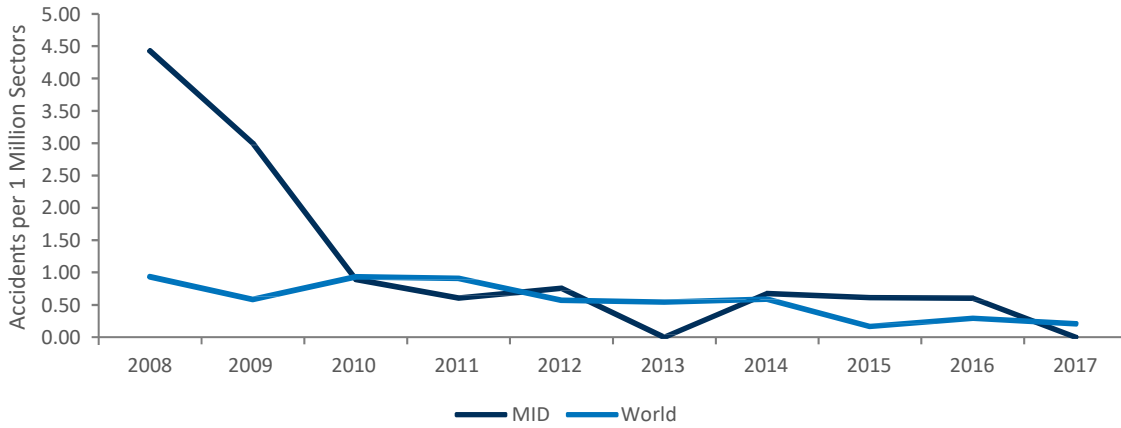

4.3.2 Analysis of MID Accidents between 2013 and 2017

This analysis provides an overview of the accidents between 01 Jan 2013 and 31 Dec 2017.

Distribution of accidents as percentage of total.

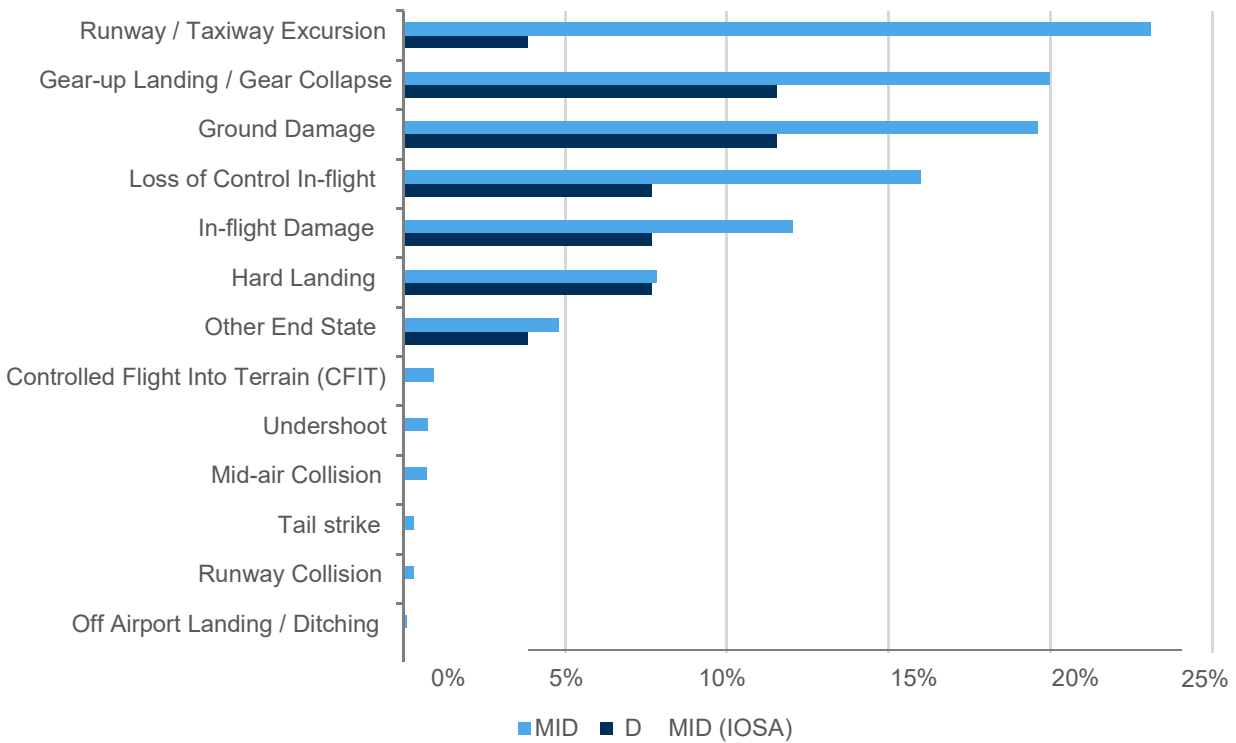


In terms of frequency, based on above figure the most frequent accidents categories in the MID Region for the period 2013 – 2017 are;

1. Runway/ Taxiway excursion
2. Gear up landing/ Gear collapse
3. Ground damage
4. Loss of control in flight
5. Inflight damage

MID Fatal Accident Categories (2013 - 2017)

Accident Category Distribution

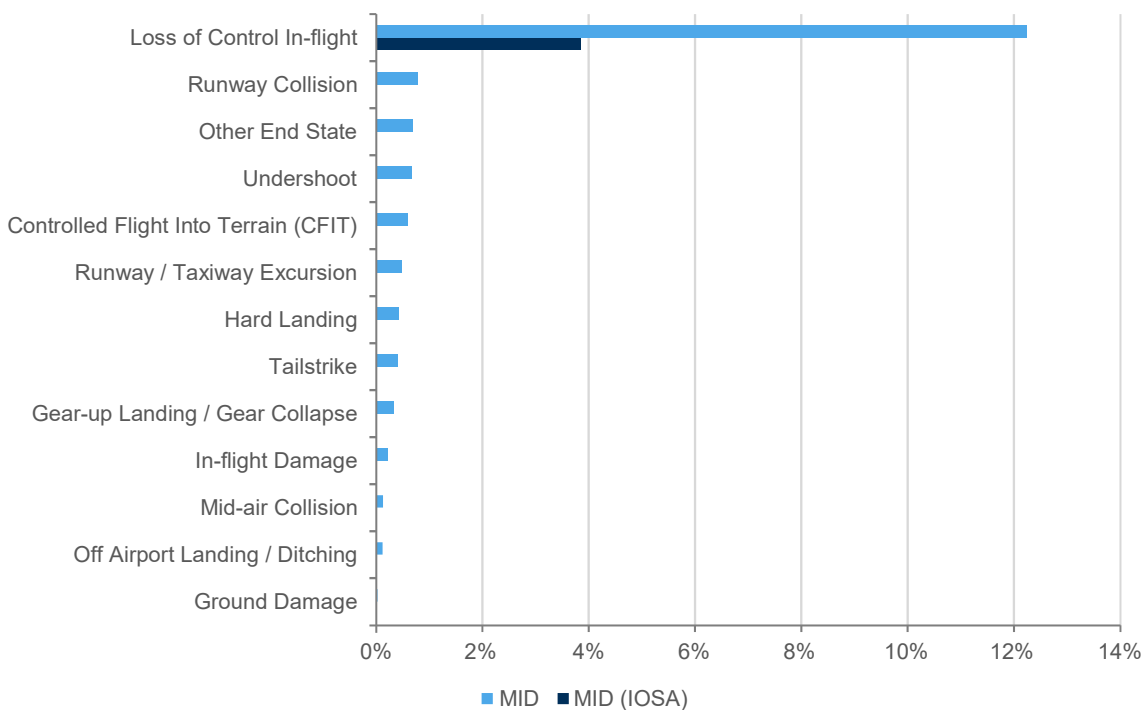

In terms of fatality, the top three fatal accidents categories in the MID Region for the period 2013 – 2017 are;

1. Loss of control inflight (LOC-I)
2. Runway collision
3. Other end state
4. Controlled flight into terrain (C-FIT)

4.3.3 Accidents Categories and Analysis

Top contributing factors (2013-2017)

Latent conditions

All

Meteorology	16%
Airport Facilities	16%
Other	11%

Environmental Threats

All

Safety Management	37%
Regulatory Oversight	32%
Design	21%

Airline Threats

All

Aircraft Malfunction	32%
Maintenance Events	21%
Gear / Tire	21%

Flight Crew Errors

All

Manual Handling / Flight Controls	32%
SOP Adherence / SOP Cross-verification	21%
Automation	11%

Countermeasures

All

Monitor / Cross-check	26%
Overall Crew Performance	21%
Workload Management	11%

Undesired Aircraft States

All

Long/floated/bounced/firm/off-center/c	21%
Loss of aircraft control while on the gro	16%
Engine	11%


A. IATA In-Depth Analysis of MID Accidents

RASG Accident Analysis

MID

High Risk Accident Categories


Runway / Taxiway Excursion

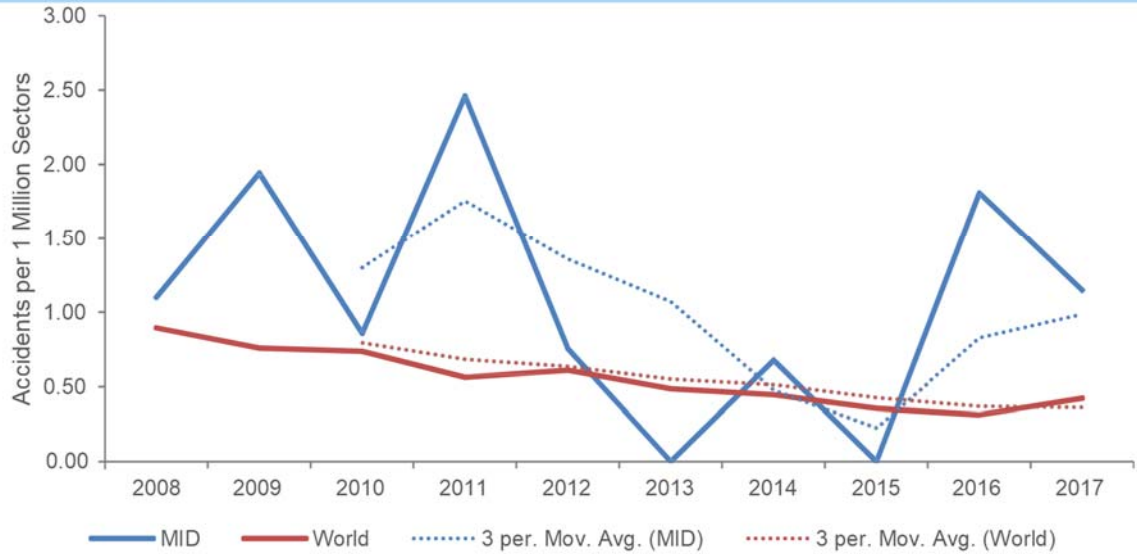

Top Contributing Factors

- Regulatory Oversight
- Safety Management
- Airport facilities
- Poor/faint marking/signs or runway/taxiway
- Contaminated runway/taxiway
- Long/floated/bounced/firm/off-center
- Loss of aircraft control while on the ground

Loss of Control In-flight Yearly Rate

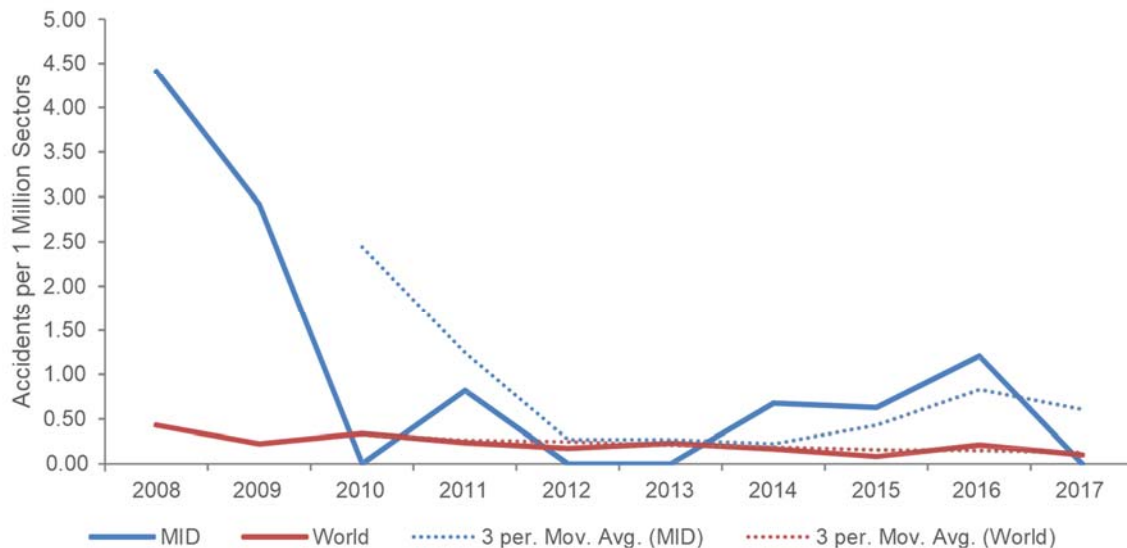

Top Contributing Factors

- Flight Ops: SOPs & Checking
- Flight Ops: Training Systems
- Wind/Windshear/Gusty wind
- Poor visibility / IMC
- Aircraft Malfunction
- Contained Engine Failure/Powerplant
- Operation Outside Aircraft Limitations
- Vertical / Lateral / Speed Deviation

4.4 MID Region Safety Performance - Safety Indicators-Reactive

		Average 2013-2017		2017	
Safety Indicator	Safety Target	MID	Global	MID	Global
Number of accidents per million departures	Reduce/Maintain the regional average rate of accidents to be in line with the global average rate by 2016	2.49	2.6	1.45	2.42
Number of fatal accidents per million departures	Reduce/Maintain the regional average rate of fatal accidents to be in line with the global average rate by 2016	0.64	0.44	0	1.32
Number of Runway Safety related accidents per million departures	Reduce/Maintain the regional average rate of Runway Safety related accidents to be below the global average rate by 2016	1.18	1.22	0	1.12
	Reduce/Maintain the Runway Safety related accidents to be less than 1 accident per million departures by 2016	1.54			
Number of LOC-I related accidents per million departures	Reduce/Maintain the regional average rate of LOC-I related accidents to be below the global rate by 2016.	0	0.08	0	0.05
Number of CFIT related accidents per million departures	Reduce/Maintain the regional average rate of CFIT related accidents to be below the global rate by 2016.	0	0.02	0	0.02


5. Proactive Safety Information

A mature safety management system requires the integration of reactive, proactive and predictive safety data. This section of the Annual Safety Report focuses on proactive safety data analysis to identify additional focus areas that form the basis for the development of SEIs and DIPs for Emerging Risks under RASG-MID.

5.1 ICAO USOAP-CMA


The regional average overall Effective Implementation (EI) in the MID Region (13 out of 15 States have been audited) is 73.24 %, which is above the world average 66.27% (as of 10 October 2018). Three (3) States are currently below EI 60%.

Currently, 77% of the audited States achieved the target of 60% EI, as suggested by the Global Aviation Safety Plan (GASP) and the MID Region Safety Strategy. It should be highlighted that some validation activities have been conducted recently such as ICVMs, which would positively affect the results.

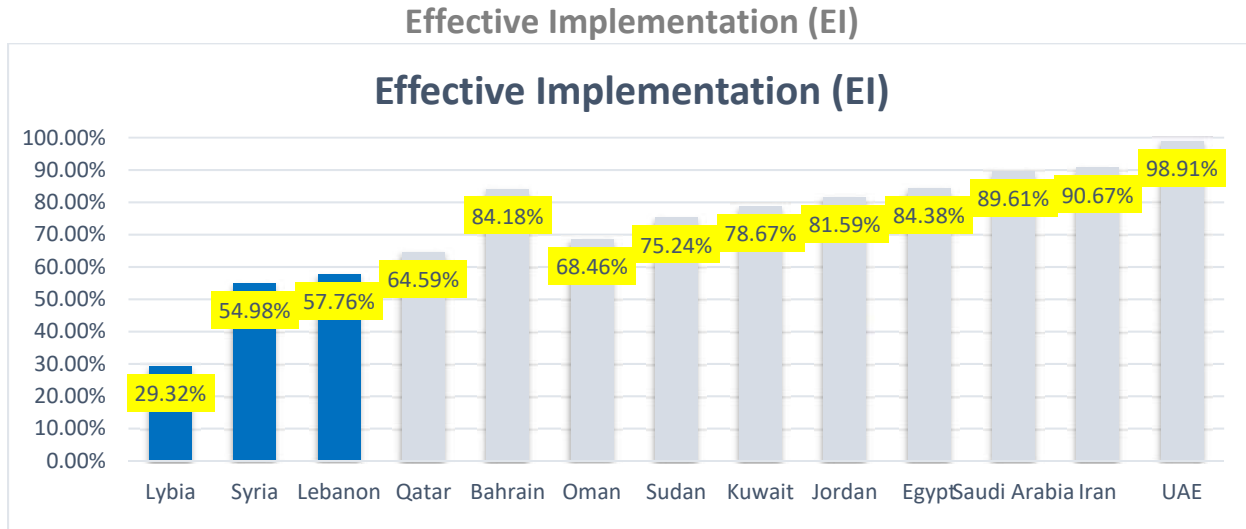

Source: ICAO USOAP CMA On Line Framework (OLF), as of 10 October 2018


The EI by Area (e.g. Operations, Airworthiness) shows that all areas are above 60% EI, which reflect the improvement in the oversight capabilities particularly in the area of ANS and AGA. With respect to the Critical Elements (CEs), CE4 (Qualified technical personnel) still represents the lowest with 56.89% EI, whereas CE8 (resolution of safety issues) is also below EI 60% (56.84%).

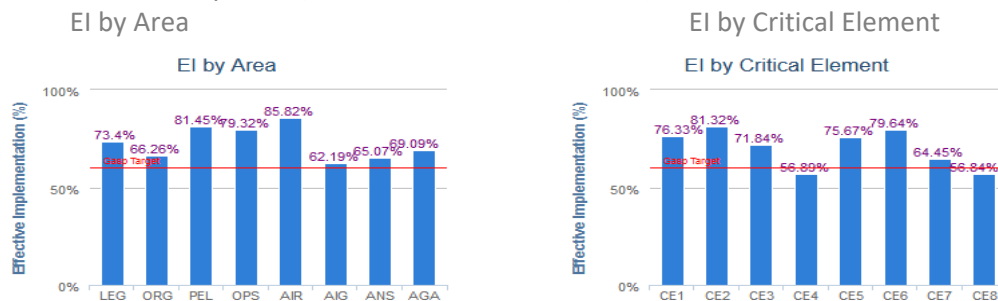

Source: ICAO iSTARS, as of 10 October 2018

Incident data provided by the MID States for the period (2015-2017)

The graph below shows that the number of bird strike incidents reported is the highest one, followed by system component system-non-power plant and airborne conflict incidents (near midair collision). For an in-depth analysis and to identify the underlying safety issues, MID States should provide further data analysis in order to come out with strategic initiatives and mitigations. In addition, the turbulence encounter category incidents needs to be broken down to wake turbulence category in order to conduct a meaning full analysis and States needs to be urged to share the occurrences related to wake Turbulence category.

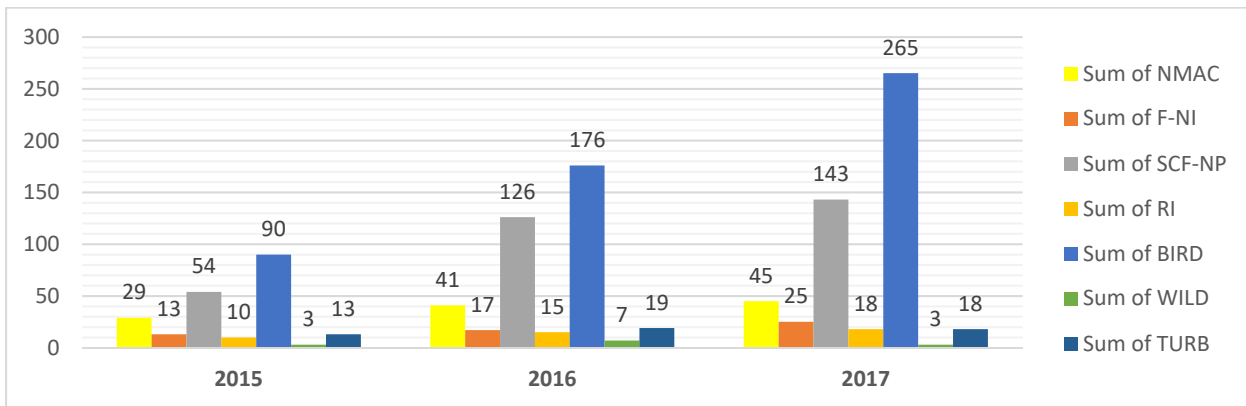

Graph 22: Total number of incidents provided by the MID States for the period 2015-2017

5.2 IATA IOSA and ISAGO


5.2.1 IATA Operational Safety Audit (IOSA)

IOSA is an internationally recognized and accepted evaluation system designed to assess the operational management and control systems of an airline. It is worth mentioning that all MID accidents rate among non-IOSA registered operators for the period 2013- 2017, was above the world average.

RASG Accident Analysis


MID

Yearly Trends (All Accidents IOSA vs. Non-IOSA Comparison)

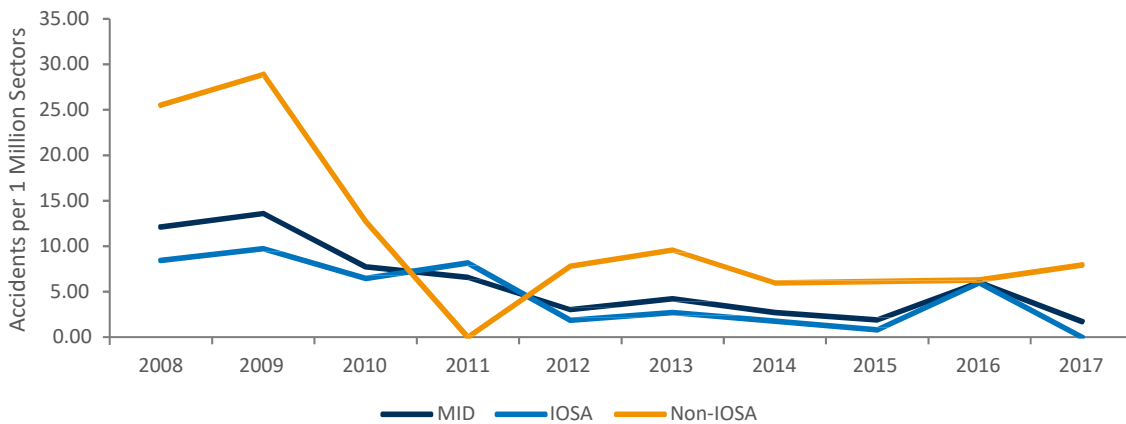


The IOSA program covers 8 areas including: Organization and Management System (ORG), Maintenance (MNT), Cargo (CGO), Security (SEC), Flight Operations (FLT), Dispatch (DSP), Cabin Safety (CAB) and Ground Handling Operations (GRH).

2017 statistics: A total of 18 closed audits from, below is the top findings/observations list.

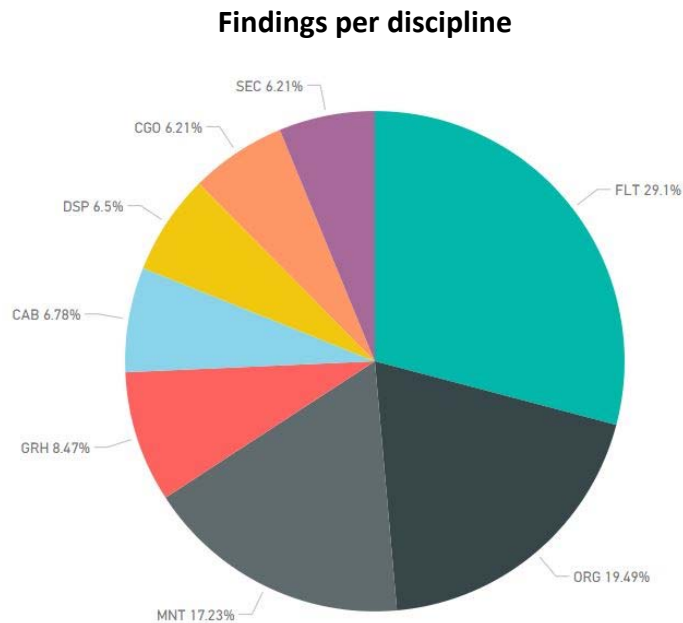

Findings were mainly in the areas of Flight Operations (FLT) (29.1%), Organization Management (ORG)(19.49 %), Maintenance (MNT) (17.23%), and Ground Handling Operations (GRH) (8.47%).

Top 10 Findings by Occurrence

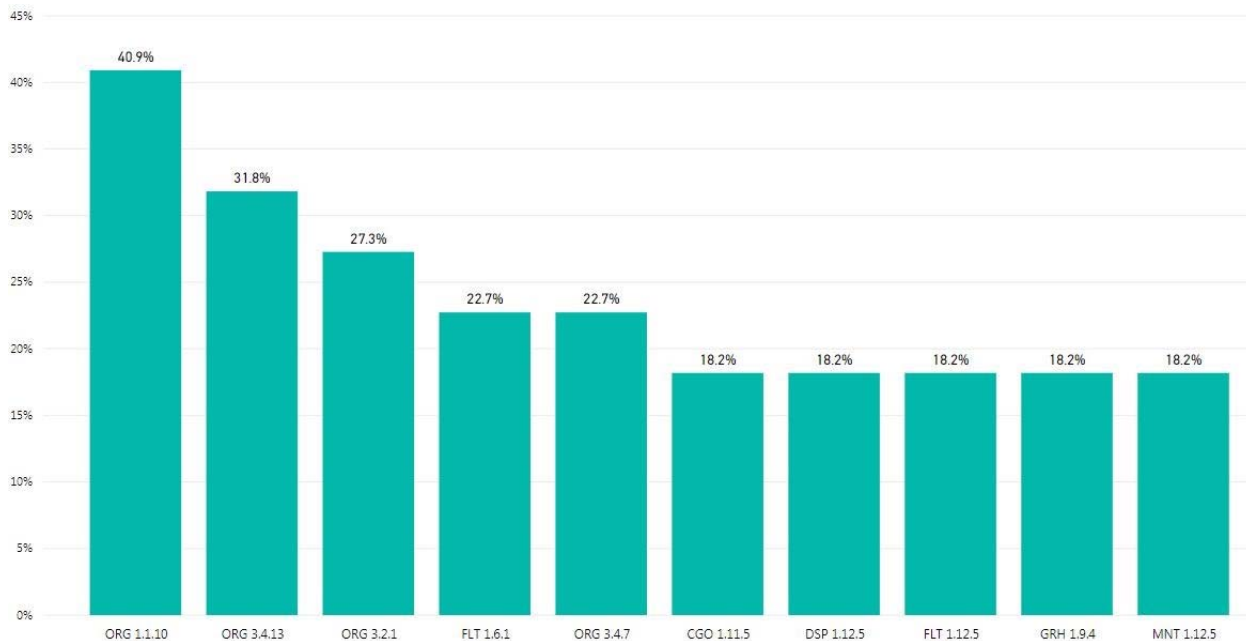

ORG 1.1.10 : SMS that is implemented and integrated throughout the organization to ensure management of the safety risks associated with aircraft operations.

ORG 3.4.13: training and qualification program for auditors that conduct auditing under the quality assurance program

ORG 3.2.1 : Processes for setting performance measures as a means to monitor the operational safety performance of the organization and to validate the effectiveness of safety risk controls (SMS).

FLT 1.6.1 : system for the management and control of flight operations documentation and/or data used directly in the conduct or support of operations

ORG 3.4.7 : process for the production of a Conformance Report (CR) that is certified by the accountable executive

CGO 1.11.5 : processes in the cargo operations organization for setting performance measures as a means to monitor the safety performance of the organization and to validate the effectiveness of risk controls.(SMS)

DSP 1.12.5 : processes in the organization responsible for the operational control of flights for setting performance measures as a means to monitor the safety performance of the organization and to validate the effectiveness of risk controls.(SMS)

FLT 1.12.5 : processes in the flight operations organization for setting performance measures as a means to monitor the safety performance of the organization and to validate the effectiveness of risk controls.(SMS)

GRH 1.9.4 : Audit planning process and sufficient resources to ensure audits of ground handling operations

MNT 1.12.5: setting performance measures as a means to verify the safety performance of maintenance operations and to validate the effectiveness of risk controls (SMS)

5.2.2 IATA Safety Audit for Ground Operations (ISAGO)


ISAGO implementation aims at improving ground safety and cutting the airlines' costs by drastically reducing the ground accidents and injuries.

The ISAGO program has 7 sections including: Load control (LOD), Passenger & Baggage handling (PAB), Aircraft Handling & Loading (HDL), Aircraft Ground Movement (AGM), Cargo & Mail Handling (CGM), Organization & Management – Corporate (ORM-H), Organization & Management – Co-located (ORM-HS) and Organization & Management – Station (ORM-S).

The ISAGO audit results analysis captured under this section cover the period between January and December 2017. A summary of the ISAGO findings is as follows:

1. A total of 34 audits took place in 2017 have been included in the analysis covering the IATA MENA Region.
2. 40 findings were recorded.
3. Findings were mainly in the areas of Aircraft Handling & Control (HDL), Passenger and Baggage Handling (BAP), and Load Control (LOD). Below is a graph that illustrates the distribution of findings per area:

DISTRIBUTION OF REPORTS PER DISCIPLINE

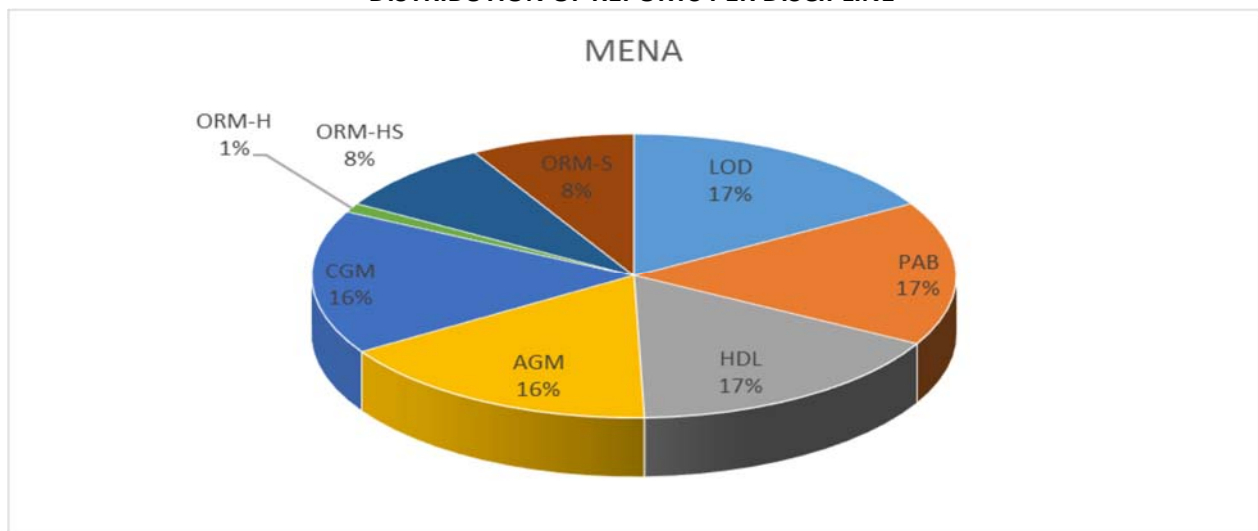


5.3 Incidents Reported by Airlines - STEADES Data

The Safety Trend Evaluation, Analysis & Data Exchange System (STEADES) is IATA's aviation safety incident data management and analysis program. It is a database of de-identified airline incident reports from over 200 participating airlines with an annual reporting rate now exceeding 200,000 reports/year. Safety trend analysis using STEADES is included in this report allows proactive safety mitigation, provides rates on key safety performance indicators, and helps to continuously assess and establish safety performance targets.


The scope of analysis captured covers quarterly trends for the period Q1 2013 to Q4 2017 inclusive. The analysis is conducted on Air Safety Reports (ASR) and Cabin Safety Reports (CSR) held in IATA's STEADES database.

Wake Turbulence

The data query resulted in a total of 1,159 reports in 2017. After quality controls were performed, 624 reports were retained for analysis, which equals to 0.01 reports per 1,000 flights or 1 encounter in every 100,000 flights. The figure below shows the number of reports and the rate per 1000 STEADES flights for the period 2013-2017.

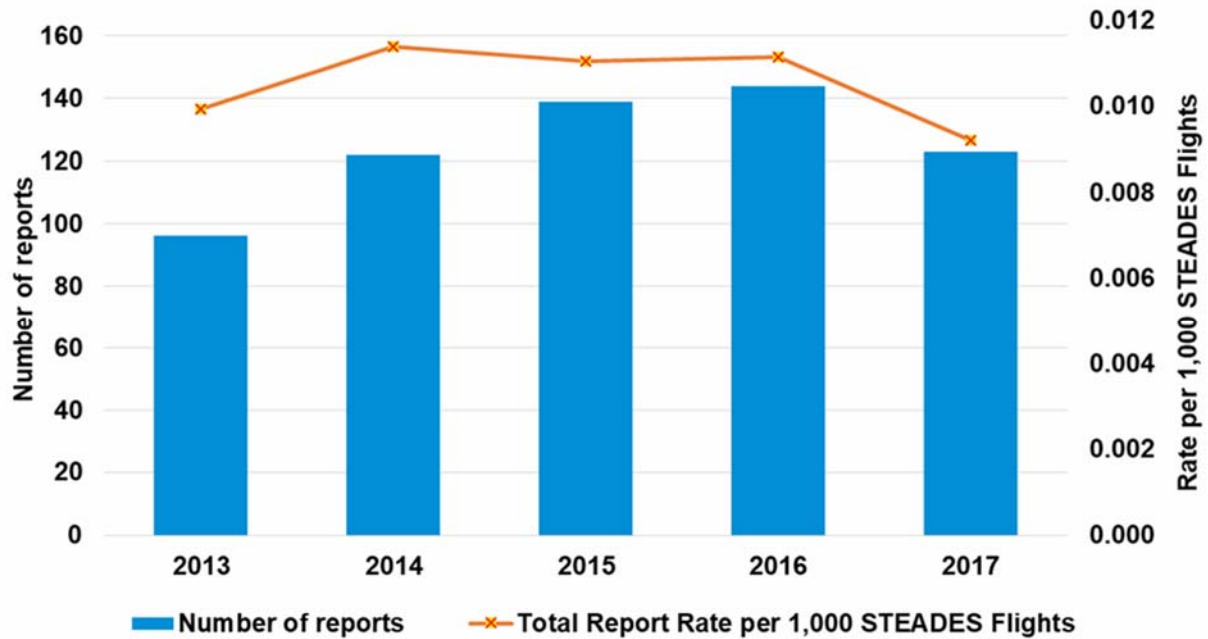


Muscat, Bahrain, Jeddah and Tehran FIRs are the top FIRs in terms of number of reports.

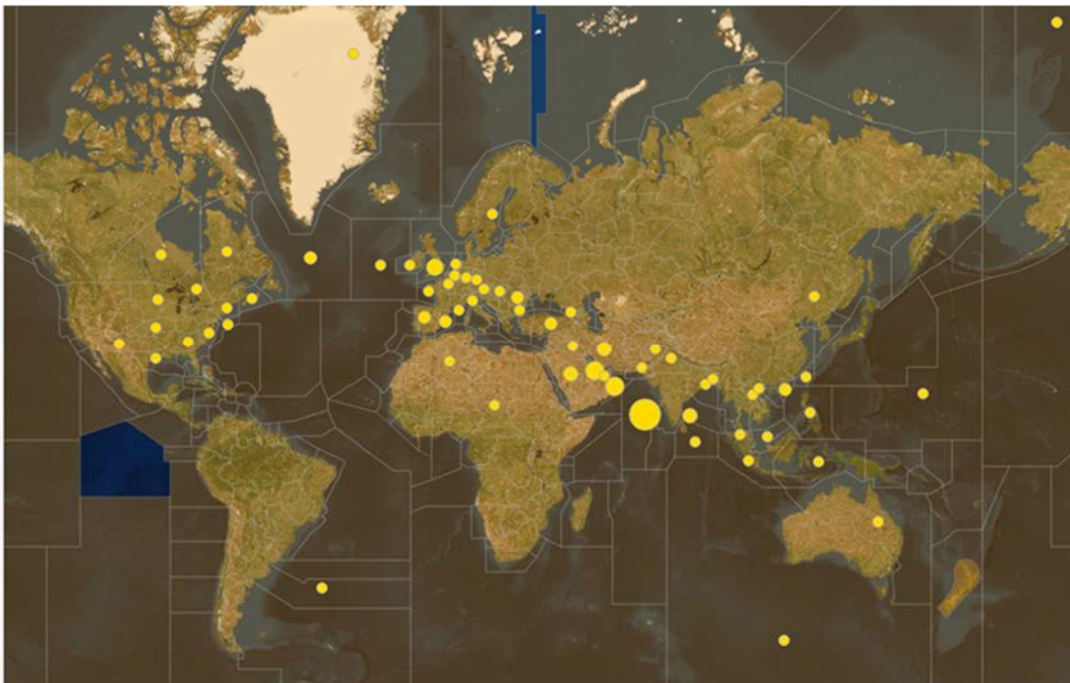

Muscat	12
Bahrain	11
Jeddah	7
Tehran	7


Upper Heavy (CAT B) and Upper Medium (CAT D) aircraft reported the highest number of events

Number of reports per Aircraft Wake Turbulence Category

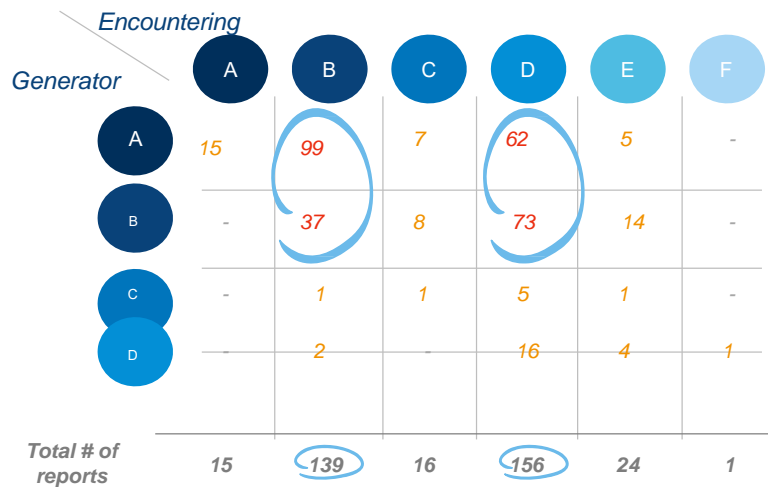

A pairing based on the Wake Turbulence RECAT, shows that CAT D and CAT B were the most frequent aircraft categories to report encountering wake turbulence, mainly generated by CAT A and CAT B aircrafts, mostly of Moderate & Severe intensity

Wake Turbulence generator: top aircraft type by category

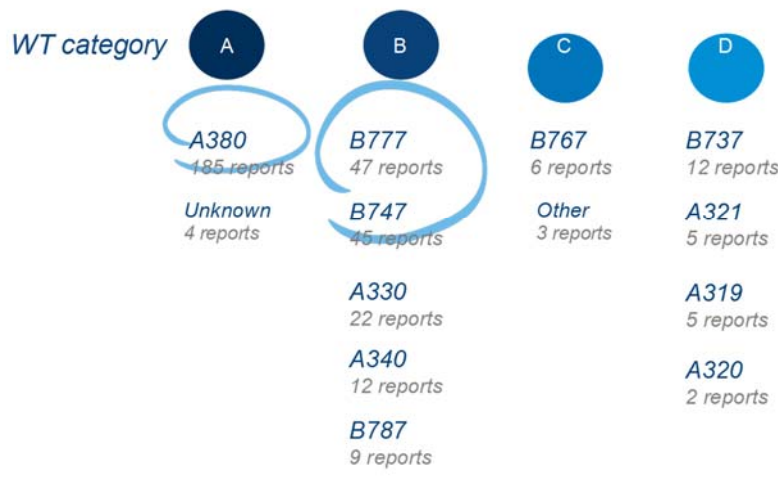

A380, B777 and B747 are the top three generator of wake turbulence in the dataset analyzed

The highest number of reports occurred when both aircraft were in level flight 186 reports.

The highest number of injuries occurred in moderate wake turbulence events

Key findings

- Mumbai, Muscat and Bahrain are the top 3 FIRs in terms of number of reports
- Upper Heavy (CAT B) and Upper Medium (CAT D) aircraft reported the highest number of events of wake turbulence encountered
- Wake Turbulence Encountered by CAT B, C and D generated from CAT A and B is mainly Moderate and Severe in intensity
- A380, B777 and B747 are the top three generator of wake turbulence in the dataset analyzed

- B777, A320, A330 and B737 are the top aircraft that encountered wake turbulence in the dataset analyzed
- The highest number of reports occurred when both aircraft were in level flight

5.4 Region Safety Performance - Safety Indicators-Proactive

Safety Indicator	Safety Target	MID	Remark
Regional average EI	Increase the regional average EI to be above 70% by 2020	70.47	Target Achieved
Number of MID States with an overall EI over 60%.	11 MID States to have at least 60% EI by 2020	10 States	
Number of MID States with an EI score less than 60% for more than 2 areas (LEG, ORG, PEL, OPS, AIR, AIG, ANS and AGA).	Max 3 MID States with an EI score less than 60% for more than 2 areas by 2017	7 States	
Number of Significant Safety Concerns	MID States resolve identified Significant Safety Concerns as a matter of urgency and in any case within 12 months from their identification. No significant Safety Concern by 2016 .	None	Target Achieved
Use of the IATA Operational Safety Audit (IOSA), to complement safety oversight activities.	a. Maintain at least 60% of eligible MID airlines to be certified IATA-IOSA at all times. b. All MID States with an EI of at least 60% use the IATA Operational Safety Audit (IOSA) to complement their safety oversight activities, by 2018.	57% (As of Sep 2017) 4 out of 10 States (40%)	
Number of certified international aerodrome as a percentage of all international aerodromes in the MID Region.	a. 50% of the international aerodromes certified by 2015. b. 75% of the international aerodromes certified by 2017.	58%	
Number of established Runway Safety Team (RST) at MID International Aerodromes.	50% of the International Aerodromes by 2020.	56%	

6. Predictive Safety Information

6.1 State Safety Programme (SSP)

Implementation of SSP is one of the main challenges faced by the State in the MID Region. The RASG-MID addresses the improvement of SSP implementation in the MID Region as one of the top Safety Enhancement Initiatives (SEIs). Common challenges/difficulties have been identified based on the States' feedback, as follows:

1. establishment of an initial Acceptable Level of Safety Performance (ALoSP), which necessitates effective reporting system to support collection/analysis of safety data;
2. allocation of resources to enable SSP implementation
3. identification of a designated entity (SSP Accountable Executive and SSP Implementation Team); and
4. lack of qualified and competent technical personnel to fulfil their duties and responsibilities regarding SSP implementation.

The following actions were recommended to support the SSP implementation:

1. continuous update of the SSP Gap Analysis available on iSTARS (13 States completed the Gap Analysis);
2. participate in the new ICAO Safety Management Training Programme (SMTP), with the CBT part and the Safety Management for Practitioners Course (the first course was conducted in the ICAO MID Regional Office, Cairo, Egypt, 14-18 January 2018);
3. work with the ICAO Regional Office to make use of available means (e.g. Technical Co-operation Bureau) to provide assistance needed for SSP implementation; and
4. identify safety management best practices in coordination with States (champion State to promote best practices among other States) including sharing of technical guidance and tools related to SSP (e.g. advisory circulars, staff instructions);
5. establishment of voluntary and mandatory safety reporting systems.

The RASG-MID also supported the establishment of the MENA RSOO, with a primary objective to assist member States to develop and implement SSP. The MENA RSOO is still in the establishment process.

Several Safety Management Workshops, training courses, Safety Summits and meetings have been organized to support the implementation of SSP/SMS and address the challenges and difficulties, as well as sharing of experiences and best practices.

6.2 IATA Safety Data

IATA's main database for collecting predictive safety information is Flight Data Exchange (FDX). It is an aggregated de-identified database of FDA/FOQA type events that allows the user to proactively identify safety hazards.

Due to the low levels of participation by the MID Region carriers in FDX program, no useful information could be extracted.

6.3 MID Region Safety Performance – Safety Indicators – Predictive

Safety Indicator	Safety Target	MID
Number of MID States, having completed the SSP gap analysis on iSTARS.	10 MID States by 2015	10 States
Number of MID States that have developed an SSP implementation plan.	10 MID States by 2015	8 States
Number of MID States with EI>60%, having completed implementation of SSP Phase 1.	All MID States with EI>60% to complete phase 1 by 2016 .	3 States (4 States-partially)
Number of MID States with EI>60%, having completed implementation of SSP Phase 2.	All MID States with EI>60% to complete phase 2 by the end of 2017 .	1 State (6 States-partially)
Number of MID States with EI>60%, having completed implementation of SSP Phase 3.	All MID States with EI> 60% to complete phase 3 by the end of 2018 .	(7 States-partially)
Number of MID States with EI>60%, having completed implementation of SSP.	All MID States with EI>60% to complete SSP implementation by 2020	None
Number of MID States with EI>60% that have established a process for acceptance of individual service providers' SMS.	a. 30% of MID States with EI>60% by 2015. b. 70% of MID States with EI>60% by 2016. c. 100% of MID States with EI>60% by 2017.	75%

7 Overall Analysis

7.1 Identification of Focus Areas for MID Region

the reactive and proactive safety information provided by ICAO and IATA and The “feared consequences” of the risk portfolio of DGAC France were considered for identifying the main risk areas for the MID Region as follow:

Undesirable/Safety Event		Potential Accident Outcome						
Safety Event	Accident Severity	CFIT	LOC-I	MAC	GCOL	RE/ARC	Injury or Damage on flight	Injury or Damage on Ground
Technical Problems with Landing Gear Collapse/Extended during landing	Major					x		x
Contained engine Failure/Power Plant Malfunctions	Catastrophic	x	x				x	
Fire/Smoke-non impact	Catastrophic		x				x	x
Un-stable or non-compliant Approach	Catastrophic	x	x			x		x
Deviation from pitch or roll attitude	Catastrophic	x	x			x		
Security Risks with impact on safety	Catastrophic		x					
Tail/Cross wind/Windshear	Major		x			x		x
Loss of separation in flight/and or airspace/TCAS RA infringement	Catastrophic		x	x			x	
Runway Incursion	Catastrophic				x	x		x
Maintenance events and technical failures	Catastrophic	x	x			x	x	x
Contaminated runway/Poor braking action	Major					x		x
Birdstrike/Engine Bird ingestion	Catastrophic		x			x	x	x
Wake Turbulence	Catastrophic			x			x	
High energy go-around			x				x	

The table shows that each identified safety issue is linked to the potential accident outcome.

First, Considering ICAO and IATA reactive safety information, the focus areas identified were runway safety (RE/ARC), the Loss of Control-in Flight (LOC-I). Considering the reactive and proactive safety information, some occurrence categories could have had led to the potential accident outcomes of Controlled Flight Into Terrain (CFIT) and Mid Air Collision (MAC) as detailed in the above table of feared consequences” of the risk portfolio of DGAC France. Therefore the CFIT and MAC were also considered as focus areas due to the potential risk of these type of accidents though the MID States did not experience those accidents during the period 2013-2017.

Based on the analyses of all ICAO and IATA data, it is concluded that the Focus Areas for the MID Region are:

1. Runway Safety (RS); mainly (RE and ARC during landing);
2. Loss of Control-In Flight (LOC-I);
3. Controlled Flight Into Terrain (CFIT); and
4. Mid-Air Collision (MAC)

Further information about the potential accident outcomes regarding the focus areas is provided below:

Loss of control-inflight (LOC-I)

Loss of control usually occurs because the aircraft enters a flight regime that is outside its normal envelope, usually, but not always, at a high rate, thereby introducing an element of surprise for the flight crew involved. Prevention of loss of control is a strategic priority.

During 2013-2017 aircraft, upset or loss of control only contributed two accidents. It includes uncontrolled collisions with terrain following engines failures after take-off, but also occurrences where the aircraft deviated from the intended flight path or aircraft flight parameters, regardless of whether the flight crew realized the deviation and whether it was possible to recover or not.

Runway Excursions (RE):

RE is a veer or overrun off the runway surface. RE events can happen during take-off or landing. During the period 2013-2017, Runway Excursions and abnormal runway contact accidents and serious incidents mainly occurred in the landing phase of flight. This includes materialized runway excursions, both high and low speed and occurrences where the flight crew had difficulties maintaining the directional control of the aircraft or of the braking action during landing, where the landing occurred long, fast, off-centred or hard, or where the aircraft had technical problems with the landing gear (not locked, not extended or collapsed) during landing.

Mid-Air Collision (MAC)

Refers to the potential collision of two aircraft in the air. It includes direct precursors such as separation minima infringements, genuine TCAS resolution advisories or airspace infringements. Although there have been no aeroplane mid-air collision accidents in recent years within the MID States, this key risk area has been raised by some MID States. This is one specific safety issue that is a main priority in this key risk area. However, additional data is needed for further analysis in order to identify the underlying safety issues.

Controlled Flight Into Terrain (CFIT)

It comprises those situations where the aircraft collides or nearly collides with terrain while the flight crew has control of the aircraft. It also includes occurrences, which are the direct precursors of a fatal outcome, such as descending below weather minima, undue clearance below radar minima, etc. There was no fatal accident involving MID States operators during this period. This key risk area has been raised by some MID States and in other parts of the world that make it an area of concern. However, additional data is needed for further analysis in order to identify the underlying safety issues.

7.2 Identification of emerging risks for MID Region

New emerging risks have been identified, as follows:

Regarding the emerging risks mainly identified from the serious incidents, IATA data and the incidents data provided by the States except the risk of security related which was included under the accident data of the State of occurrence.

1. Security Risks with impact on safety-SEC;
2. Fire/smoke- (non-impact)- (FN-I);
3. Runway incursion (RI);
4. Birdstrike-(BIRD); and
5. Wake Vortex.

Runway incursion (RI)

A Runway Incursions refers to the incorrect presence of an aircraft, vehicle or person on an active runway or in its areas of protection. Their accident outcome is runway collisions. While there were no fatal accidents or accidents involving MID States operators in the last years involving runway collision, the risk of the reported occurrence demonstrated to be very real. In addition to this, MID States should provide further data analysis regarding runway incursion in order to identify the root causes and associated safety issues.

Fire/Smoke- (non-impact) (FN-I)

Uncontrolled fire on board an aircraft, especially when in flight, represents one of the most severe hazards in aviation. In-flight fire can ultimately lead to loss of control-inflight, either because of structural or control system failure, or again because of crew incapacitation. Fire on the ground can take hold rapidly and lead to significant casualties if evacuation and emergency response are not swift enough. Smoke or fumes, whether they are associated with fire or not, can lead to passenger and crew incapacitation and will certainly raise concern and invite a response. Even when they do not give rise to a safety impact, they can give rise to concerns and need to be addressed. While there were no fatal accidents involving MID States operators in the last years involving fires, there have been incidents reported by MID States, which make it an area of concern.

Security related (SEC)

The impact of security in safety is a real concern and should be considered as a strategic priority. In addition, it should be shared with MID shared with MID States and ICAO MID Office (AVSEC) for further data collection and analysis and come out with strategic initiatives.

Birdstrike (BIRD)

Their accident outcomes could lead to runway collisions or Loss of control-inflight or runway excursions. While there were no fatal accidents involving MID States air operators in the last years involving birdstrike, there have been huge number of birdstrike occurrences reported by MID States and that make it an area of concern. Thus, MID States should provide further data analysis in order to identify the root causes and associated safety issues.

Wake Vortex

Their accident outcomes could lead to Loss of control-inflight. While there were no fatal accidents involving MID States air operators in the last years involving wake turbulence. However, there have been number of wake vortex occurrences reported by MID States and highlighted in the IATA data which make it an area of concern. Therefore, further attention should be given this safety issue.

8. Final Conclusions

Following the analysis of the reactive and proactive safety information provided by IATA and ICAO for the period 2013 - 2017, it was concluded that the main Focus Areas for the MID Region are:

1. Runway Safety (RS) - (RE and ARC during landing);
2. Loss of Control-Inflight- (LOC-I); and
3. Controlled Flight Into Terrain- (CFIT); and
4. Mid-Air Collision- (MAC).

The following are identified as Emerging Risks in the MID Region besides the old ones:

1. Security risks with impact on safety- SEC;
2. Fire/Smoke (non-impact)- F-NI;
3. Runway Incursion (RI);
4. Birdstrike- (BIRD); and
5. Wake vortex.

The regional average overall Effective Implementation (EI) in the MID Region (13 out of 15 States have been audited) is 73.24 %, which is above the world average 66.27% (as of 10 October 2018). Three (3) States are currently below EI 60%.

The EI by Area (e.g. Operations, Airworthiness) shows that all areas are above 60% EI, which reflect the improvement in the oversight capabilities particularly in the area of ANS and AGA. With respect to the Critical Elements (CEs), CE4 (Qualified technical personnel) still represents the lowest with 56.89% EI, whereas CE8 (resolution of safety issues) is also below EI 60% (56.84).

Implementation of SSP is one of the main challenges faced by the State in the MID Region. The RASG-MID addresses the improvement of SSP implementation in the MID Region as one of the top Safety Enhancement Initiatives (SEIs). Common challenges/difficulties related to SSP implementation include identification of a designated entity, establishment of an initial Acceptable Level of Safety Performance (ALoSP), allocation of resources to enable SSP implementation and lack of qualified and competent technical personnel.

It should be highlighted that reporting of incidents is still low in the MID Region (Confidentiality concerns). Moreover, mechanisms for gathering and processing predictive safety information at regional level should be established in order to collect and analyse safety data to proactively identify safety concerns before accidents and/or incidents occur, to develop timely mitigation and prevention measures.

Appendix A: List of Acronyms

ARC	Abnormal Runway Contact
ADRM	Aerodrome
ANSP	Air Navigation Service Provider
ATC	Air Traffic Control
ATS	Air Traffic Services
ASRT	Annual Safety Report Team
BIRD	Birdstrike
CTOL	Collisions with Obstacles during Take Off or Landing
CFIT	Controlled flight into terrain
DIP	Detailed Implementation Plan
F-IN	Fire/Smoke (Non-Impact)
FDA	Flight Data Analysis
FOQA	Flight Operations Quality Assurance
GCOL	Ground Collision
RAMP	Ground Handling
GASP	ICAO Global Aviation Safety Plan
IATA	International Air Transport Association
ICAO	International Civil Aviation Organization
LOC-G	Loss of Control - Ground
LOC-I	Loss of control - inflight
MAC	Mid Air Collision
MTOW	Maximum Take-off Weight
MENA	Middle East & North Africa (IATA Region)
MID	Middle East Region (ICAO Region)
RAST	Regional Aviation Safety Group
RE	Runway Excursion (departure or landing)
RI	Runway Incursion
RS	Runway Safety
SEI	Safety Enhancement Initiative
SMS	Safety Management System
SOP	Standard Operating Procedure
SSP	State Safety Programme
SCF-NP	System Component Failure-Non-Power Plant
SCF-PP	System Component Failure-Power Plant
USOS	Undershoot/Overshoot
UAS	Undesirable Aircraft State
USOAP	Universal Safety Oversight Audit Program
WILD	Wildlife

Appendix B: Go- Around

Two MID Region State registered aircraft were involved in fatal accidents in 2016 following a go around. For one accident, the Go-Around was conducted from altitudes other than the missed approach point and for the other one, the Go-around was commanded after Abnormal Runway Contact. The Go-around is a very challenging procedure and flight crew have to be sufficiently familiar with flying Go-arounds through initial and recurrent training.

To shed light on this issue, in August 2013 BEA France published the results of specific study related to the “Areophane State Awareness during Go Around”. (ASAGA). The study determined that ASAGA type events are due to the combination of the following:

- Time pressure and a hard workload
- The inadequate control of the primary flight parameters during Go-arounds, especially with startle effect
- Challenges in applying CRM principles in startle situation.
- Inadequate monitoring by the PNF
- The low number of Go-around performed by the flight crew, both in flight and simulators
- Inadequate fidelity on flight simulators
- The non-detection of the non-position of nose-up trim by the crew during go-arounds
- Mismatch between the design of procedures for Go-arounds and the performance characteristics of modern public transport aeroplanes
- Somatogravic illusions related to the excessive thrust on aeroplanes, the lack of evaluation of visual scan during the go arounds
- The channelized attention of crew members
- The difficulty of reading and understanding FMA modes
- Excessive time spent by the PNF on manipulating the FCU/MCP

Based on the study, the BEA worked out a number of safety recommendations, which are included in the report. The complete study is published at <http://www.bea.aero/etude/asaga/asaga.php>

Additionally, Flight Safety Foundation (FSF) published on March 2017 a study on “Go-around decision-making and execution project” and the study revealed that conducting a Go-around carries a number of risk including:

- Ineffective initiation of a Go-around, which can lead to LOC-I;
- Failure to maintain control during a Go-around, which can lead to LOC-I, including Abnormal Contact with the runway, or to CFIT;
- Failure to fly the required track, which can lead to CFIT or MAC;
- Failure to maintain traffic separation, which can lead to MAC; and
- Generation of wake turbulence, which may create a hazard for another aircraft that, can lead to LOC-I.

Considering the above, a focus on Go-arounds is of extreme importance and the handling of the aircraft during and after a Go-around represents a risk factor to be considered, especially on circumstances not foreseen during simulator training.

CREDITS

The RASG-MID thanks all those who contributed to the elaboration of this Annual Safety Report and provided necessary support and information to the members of the MID Annual Safety Report Team (MID-ASRT). Special thanks go to:

Mr. Jehad Faqir,

International Air Transport Association (IATA)

Mr. Mohamed Smaoui, Mashhor Alblowi and Mr. Mohamed Chakib

International Civil Aviation Organization (ICAO)

-END-



ICAO

SAFETY

ICAO, Middle East Office
Egyptian Civil Aviation Complex, Cairo Airport Road, Cairo, Egypt

Mail: P.O. Box 85, Cairo Airport Post Office Terminal One, Cairo 11776,
Arab Republic of Egypt
Tel.: +20 2 2267 4840
Fax: +20 2 2267 4843

E-mail: icaomid@icao.int





International Civil Aviation Organization
MID Annual Safety Report Team

Third Meeting (MID-ASRT/3)
(Cairo, Egypt, 20 – 22 November 2018)

Agenda Item 2: Work Programme

MID REGION PROPOSED SAFETY INDICATORS & TARGETS

(Presented by the Secretariat)

SUMMARY

This paper presents the proposed updates to the MID Region Safety Strategy concerning the safety indicators and targets.

Action by the meeting is at paragraph 3.

REFERENCES

- RASG-MID/6 Report
- RSC/6 Report

1. INTRODUCTION

1.1 The RASG-MID/6 meeting (Bahrain, 26 – 28 September 2017) endorsed the MID Region Safety Strategy (*Revision 5, September 2017*).

1.2 The Sixth meeting of the RASG-MID Steering Committee (RSC/6) was held at the ICAO Middle East Regional Office in Cairo, Egypt, 25 -27 June 2018. The RSC/6 meeting reviewed the MID Region Safety Strategy, which was endorsed by the RASG-MID/6 meeting and noted that the MID-SST/4 meeting initiated a brainstorming on the Safety Indicators and Targets related to the SSP and SMS implementation in the Region.

1.3 The RSC/6 meeting agreed that the MID Region Safety Strategy would be revisited during the Fourth MID Region Safety Summit (Riyadh, Saudi Arabia, October 2018) taking into consideration the global and regional developments, including the objectives and priorities of GASP 2020-2022, Amendment 1 to Annex 19 and Fourth Edition of the Safety Management Manual.

1.4 The RSC/6 meeting decided to include ISAGO in the revised version of the MID Region Safety Strategy. IATA will provide proposals for the associated safety indicators and targets, based on the current status of implementation and future plans.

2. DISCUSSION

MID Region Safety Indicators and Targets

2.1 The meeting may wish to note that the MID Region Safety Strategy has been revisited during the Fourth MID Region Safety Summit.

2.2 The revised version of the MID Region Safety Strategy will be presented to the RASG-MID/7 meeting for endorsement.

2.3 The proposed updates of the different Safety Indicators and Targets are presented at **Appendix A.**

3. ACTION BY THE MEETING

3.1 The meeting is invited to:

- a) review the updated MID Region Safety Indicators and Targets; and
- b) provide suggestions, as appropriate, for future consideration.

APPENDIX A



**Fourth MID Region Safety Summit
(Riyadh, Saudi Arabia, 2-3 Oct 2018)**

Revised MID Region Safety Targets

**STATUS OF THE MID REGION SAFETY INDICATORS TARGETS
(SAFETY INDICATORS TARGETS RELATED TO RGS ARE SHADED IN ORANGE)**

Aspirational Goal: Zero fatality by 2030

Goal 1: Achieve a continuous reduction of operational safety risks

Safety Indicator	Safety Target	Timeline	Status
Number of accidents per million departures	Reduce/Maintain the Regional average rate of accidents to be in line with the global average rate by 2016 and beyond.	2016	
Number of fatal accidents per million departures	Reduce/Maintain the Regional average rate of fatal accidents to be in line with the global average rate by 2016	2016	
Number of fatalities per million departures	Number of fatalities per billion passengers carried (fatality rate) to be in line with the global average rate	2018	
Number of Runway Safety Excursion accidents per million departures	Reduce/Maintain the Regional average rate of Runway Safety Excursion accidents to be below the global average rate by 2016	2016	
Number of Runway Safety Incursion accidents per million departures	Reduce/Maintain the Runway Safety related accidents to be less than 1 accident per million departures by 2016 Regional average rate of Runway Safety Incursion accidents to be below the global average rate	2018	
Number of LOC-I related accidents per million departures	Reduce/Maintain the Regional average rate of LOC-I related accidents to be below the global rate by 2016	2016	
Number of CFIT related accidents per million departures	Reduce/Maintain the Regional average rate of CFIT related accidents to be below the global rate by 2016	2016	
Number of Mid Air Collision (accidents)	Zero Mid Air Collision accident	2018	

Safety Indicator	Safety Target	Timeline	Status
Number of Near Mid Air Collision (serious incidents)	Regional average rate of Near Mid Air Collision (serious incidents per million departures) to be less than 0.1 All States to reduce the rate of Near Mid Air Collision (AIRPROX) within their airspace by 2020	2020	

Goal 2: Strengthen States' safety oversight capabilities/Progressively increase the USOAP-CMA EI scores/results:

Safety Indicator	Safety Target	Timeline	Status
USOAP-CMA Effective Implementation (EI) results: a. Regional average EI b. Number of States with an overall EI over 60% c. Regional average EI by area d. Regional average EI by CE Number of MIDStates with an EI score less than 60% for more than 2 areas (LEG, ORG, PEL, OPS, AIR, AIG, ANS and AGA).	Progressively increase the USOAP-CMA EI scores/results: a. Increase the r Regional average EI to be above 70% by 2020 b. 11 MID States to have at least 60% EI by 2020 c. Regional average EI for each area to be above 70% by 2020 d. Regional average EI for each CE to be above 70% by 2020 Max 3 MIDStates with an EI score less than 60% for more than 2 areas by 2017.	a. 2020 b. 2020 c. 2020 d. 2020	
Number of Significant Safety Concerns (SSC)	a. No Significant Safety Concern (SSC) by 2016. States resolve identified Significant Safety Concerns SSC, if identified, to be resolved as a matter of urgency, and in any case within 12 months from their its identification	2016	

Goal 3: Improve aerodrome safety:

Safety Indicator	Safety Target	Timeline	Status
Number of certified International Aerodrome as a percentage of all International Aerodromes in the MID Region	a. 50% of the International Aerodromes certified by 2015 b. 75% of the International Aerodromes certified by 2017	a. 2015 b. 2017	
Number of established Runway Safety Team (RST) at MID International Aerodromes.	50% of the International Aerodromes having established a RST by 2020 .	2020	

Goal 4: Expand the use of Industry Programmes:

Safety Indicator	Safety Target	Timeline	Status
Use of the IATA Operational Safety Audit (IOSA), to complement safety oversight activities.	a. Maintain at least 60% of eligible MID airlines to be certified IATA-IOSA at all times. b. All MID States with an EI of at least 60% use the IATA Operational Safety Audit (IOSA) to complement their safety oversight activities, by 2018 .	a. N/A b. 2018	
Use of the IATA Safety Audit for Ground Operations (ISAGO) certification, as a percentage of all Ground Handling service providers	The IATA Ground Handling Manual (IGOM) endorsed as a reference for ground handling safety standards by all MID States. Pursue at least 50% increase in ISAGO registration (baseline 2017)	2020	
Use of the ACI Airport Excellence (APEX) in Safety programme	At least 1 ACI APEX in Safety conducted in 1 Airport of the Region per year	N/A	

Goal 5: Implementation of effective SSPs and SMSs:

Safety Indicator	Safety Target	Timeline	Status
Percentage of MID States that use ECCAIRS for the reporting of accidents and serious incidents.	a. 60% 9 States by 2019 b. 80% 12 States by 2020	a. 2019 b. 2020	
Number of States that have completed the SSP Gap Analysis on iSTARS	13 States by 2020	2020	
Number of States that have developed an SSP implementation plan	13 States by 2020	2020	
Regional Average SSP Foundation (in %)	70% by 2022	2022	
Number of States that have fully implemented the SSP Foundation	10 States by 2022	2022	
Number of States that have established an ALoSP	10 States by 2025	2025	
Number of States that have implemented an effective SSP	10-7 States by 2025	2025	
Percentage—Number of States that have established a process for acceptance of individual service providers' SMS	80% 12 States by 2020	2020	
Number of States providing information on safety risks, including SSP SPIs, to the RASG-MID	7 States by 2022	2020	
Establishment of a Regional mechanism for regional data collection, sharing and analysis	Regional Mechanism established by 2018	2018	
Number of MID States with EI>60%, having completed implementation of SSP Phase 1.	All MID States with EI>60% to complete phase 1 by 2016.		

Safety Indicator	Safety Target	Timeline	Status
Number of MID States with EI>60%, having completed implementation of SSP Phase 2.	All MID States with EI>60% to complete phase 2 by 2017.		
Number of MID States with EI>60%, having completed implementation of SSP Phase 3.	All MID States with EI>60% to complete phase 3 by 2018.		
Number of MID States with EI>60%, having completed implementation of SSP.	All MID States with EI>60% to complete SSP implementation by 2020.		

Goal 6: Increase Collaboration at the Regional Level to enhance safety:

Safety Indicator	Safety Target	Timeline	Status
Number of States attending the RASG-MID meetings	At least 12 States from the MID Region	2019	
Number of States providing required data related to accidents, serious incidents and incidents to the MID-ASRT	All States from the MID Region	2020	
Number of States requiring and actively seeking assistance/support	All States having an EI below 60% to be member of the MENA RSOO	2019	
Number of States that received assistance/support through the RASG-MID, MENA RSOO and/or other NCLB mechanisms	All States having an EI below 60% to have an approved NCLB Plan of Actions for safety (agreed upon with the ICAO MID Office)	2019	
	SEI or Technical Assistance Mission/Project implemented for each assistance need identified by the RASG-MID		

Safety Indicator	Safety Target	Timeline	Status
Number of States, having an EI below 60% in some areas, delegating certain safety oversight functions to the MENA RSOO or other State(s)	Percentage of States, having an EI below 60% in some areas, delegating certain safety oversight functions to the MENA RSOO or other State(s), to be at least 50%	2022	
Number of States that contribute to the implementation of SEIs and Technical Assistance Missions/Projects	7 States	2020	
Percentage of SEIs implemented in accordance with the agreed timeframe	80% of the SEIs	N/A	

Goal 7: Ensure the appropriate infrastructure is available to support safe operations:

Safety Indicator	Safety Target	Timeline	Status
Number of Air Navigation Deficiency Priority “U” identified by MIDANPIRG	No Air Navigation Deficiency Priority “U”	2022	

Goal 8: Monitor the fleet age:

Safety Indicator	Safety Target
*Average Fleet Age.	States are required to monitor their fleet age. No regional Safety Targets are defined.
*Percentage of fleet above 20 years of age.	



International Civil Aviation Organization

MID Annual Safety Report Team

Second Meeting (MID-ASRT/3)
(Cairo, Egypt, 20 – 22 November 2018)

Agenda Item 3: Future Work Programme

DATE AND VENUE OF THE MID-ASRT/4 MEETING

(Presented by the Secretariat)

SUMMARY

The aim of this paper is to agree on the date and venue of the Fourth MID Annual Safety Report Team meeting (MID-ASRT/4).

Action by the meeting is at paragraph 2.

1. INTRODUCTION

1.1 The meeting may wish to note that the MID-ASRT/4 is planned to be held in Cairo, Egypt, 25-27 November 2019.

2. ACTION BY THE MEETING

2.1 The meeting is invited to agree on the dates and venue of the MID-ASRT/4 meeting.

- END -



International Civil Aviation Organization

MID Annual Safety Report Team

Third Meeting (MID-ASRT/3)
(Cairo, Egypt, 20 – 22 November 2018)

LIST OF INFORMATION AND WORKING PAPERS

1- WORKING PAPERS

WP No.	Agenda Item	Title of Working Paper	Presented by
1	1. Adoption of the Provisional Agenda	Provisional Agenda and Election of the Rapporteur	Secretariat
2	2. Work Programme	Follow-up on the RSC-MID/6 Conclusions and Decisions	Secretariat
3	2. Work Programme	Review of the Seventh MID Annual Safety Report	Secretariat
4	2. Work Programme	MID Region Proposed Safety Strategy	Secretariat
5	3. Future Work Programme	Date and venue of the MID-ASRT/4 meeting	Secretariat
	4. Any other business		

2- INFORMATION PAPERS

IP No.	Agenda Item	Title of Information Paper	Presented By
1		List of IPs/WPs	Secretariat
2		Work Programme/Daily Order of Business	Secretariat

3- PRESENTATIONS

PPT No.	Agenda Item	Title of Presentation	Presented By
1	2. Work Programme	Review of Seventh MID Annual Safety Report	Secretariat
2	2. Work Programme	States' presentations on the Safety Data Collection and Analysis	States

- END -



International Civil Aviation Organization

MID Annual Safety Report Team

Second Meeting (MID-ASRT/3)
(Cairo, Egypt, 20 – 22 November 2018)

DAILY ORDER OF BUSINESS AND WORK PROGRAMME

(Presented by the Secretariat)

Days	Registration 08:30- 09:00	1st Session 09:00 - 10:30	Break 10:30 - 11:00	2nd Session 11:00 - 12:30	Break 12:30 - 13:00	3rd Session 13:00 - 14:30
Day 1: Tuesday 20/11/2018	Registration of Delegates	Opening of the meeting (IP/1, IP/2)	Break (Group Photo)	Agenda Item 2: WP/2	Break	Agenda Item 2: PPT/2
		Agenda Item 1: WP/1		Agenda Item 2: PPT/2		
		1st Session 09:00 - 10:30	Break 10:30 - 11:00	2nd Session 11:00 - 12:30	Break 12:30 - 13:00	3rd Session 13:00 - 14:30
Day 2: Wednesday 21/11/2018	Agenda Item 2: WP3, PPT/1 Agenda item 2: WP/3 (cont'd)			Agenda item 2: WP/3 (cont'd)		Agenda item 2: WP/4 Agenda Item 3: WP/5 Agenda Item 4: AOB
Day 3: Thursday 22/11/2018	Review of the Draft Report Closing of the Meeting					

Notes:

IP: Information Paper

WP: Working Paper

PPT: Presentation