



*International Civil Aviation Organization*

**Middle East Air Navigation Planning and  
Implementation Regional Group (MIDANPIRG)**

**Fourteenth Meeting**  
*(Jeddah, Saudi Arabia, 15-19 December 2013)*

---

**Agenda Item 4:           Performance Framework for Region Air Navigation Planning and  
Implementation**  
**4.1 MSG**

**MID REGION AIR NAVIGATION STRATEGY**

*(Presented by the Secretariat)*

**SUMMARY**

This paper presents a Draft MID Region Air Navigation Strategy which includes the Regional Aviation System Block Upgrades (ASBU) implementation Plan, for review and endorsement by MIDANPIRG/14.

Action by the meeting is at paragraph 3.

**REFERENCES**

- CNS/ATM/IC SG/7 Report
- DGCA-MID/2 Report
- MSG/3 Report

**1. INTRODUCTION**

1.1           The Third Meeting of the MIDANPIRG Steering Group (MSG/3) was held in Cairo, Egypt, from 17 to 19 June 2013. The meeting was attended by a total of twenty two (22) participants from seven (7) States (Bahrain, Egypt, Iran, Jordan, Lebanon, Saudi Arabia and United Arab Emirates), two (2) Organizations (IATA and IFALPA) and one (1) Agency (MIDRMA).

1.2           The seventh meeting of the MIDANPIRG CNS/ATM/IC SG was held at the ICAO MID Regional Office in Cairo, Egypt, 07 October – 09 October 2013.

**2. DISCUSSION**

2.1           The Global Air Navigation Plan GANP establishes a framework for incremental implementations based on the specific operational profiles and traffic densities of each Region and State, which is accomplished through the evaluation of the Aviation System Block Upgrades (ASBU) modules to identify which of those modules best provide the needed operational improvements. In this respect, it is to be highlighted that Recommendation 6/1 of the AN-Conf/12 calls upon States and PIRGs to finalize the alignment of Regional Air Navigation Plans with the Fourth Edition of the GANP by May 2014. This was endorsed during the 38<sup>th</sup> Assembly held in September 2013.

2.2 The meeting may wish to note that the outcome of the Planning and Implementation Regional Groups (PIRGs) and Regional Aviation Safety Groups (RASGs) Global Coordination Meeting (GCM) that was held in Montreal on 19 March 2013 under the Chairmanship of the President of the ICAO Council, included, inter-alia:

- a) agreement on establishing regional priorities and targets for air navigation by May 2014 consistent with the GANP/ASBU framework;
- b) agreement on the need to measure performance improvements to help demonstrate their positive impact on the environment; and
- c) endorsement of the envisioned regional performance dashboard prototype and envisioned determination of an initial set of indicators and metrics for air navigation.

2.3 The meeting may wish to recall that, in accordance with Recommendation 6/1 of the AN-Conf/12 and the outcome of the PIRGs and RASGs GCM, the DGCA-MID/2 meeting reiterated the need for the establishment of regional priorities and targets for air navigation by May 2014 consistent with the GANP and ASBU framework. Accordingly, the DGCA-MID/2 meeting:

- a) urged States to:
  - i. establish a performance measurement strategy for their air navigation system;
  - ii. share successful initiatives among each other; and
  - iii. support the ICAO MID Regional Office by providing the requisite information to demonstrate operational improvements; and
- b) tasked MIDANPIRG and its Steering Group (MSG) with:
  - i. the establishment of priorities and targets for air navigation by May 2014, in accordance with Recommendation 6/1 of the Twelfth Air Navigation Conference (AN Conf/12);
  - ii. the monitoring and measurement of the agreed air navigation Metrics and indicators, at regional level; and
  - iii. the identification of necessary measures/action plans to reach the agreed air navigation targets.

2.4 The meeting may recall that MIDANPIRG/12 through Conclusion 12/47 endorsed 8 Metrics for performance monitoring of the Air Navigation Systems in the MID Region and MIDANPIRG/13 endorsed an initial set of operational improvements for further review/consideration taking into account the outcome of the AN-Conf/12.

2.5 Based on all of the above and taking into consideration the outcome of the First Meeting of the ANP Ad-hoc Working Group (ANP WG/1) held in Cairo, 27-29 May 2013, the MSG/3 meeting agreed on eight ASBU Block 0 Modules to be included in the MID Region Air Navigation Strategy, pending final endorsement by MIDANPIRG/14.

2.6 The CNS/ATM/IC SG/7 meeting noted that, as a follow-up action to the MSG/3 *DRAFT CONCLUSION 3/1 – MID REGION AIR NAVIGATION STRATEGY*, the ICAO MID Regional Office issued State Letter Ref.: AN 1/7– 13/169 dated 30 June 2013, requesting States and Users to review the Draft MID Air Navigation Strategy, and provide comments/inputs to the ICAO MID Regional Office before 15 August 2013. It was highlighted that few replies were received but with no inputs regarding the Metrics, Key Performance Indicators (KPIs) and Action Plans.

2.7 The CNS/ATM/IC SG/7 meeting noted that the initial Draft Air Navigation Strategy endorsed by the MSG/3 meeting was further reviewed, developed and updated by the secretariat, the AOP SG/9 meeting (Cairo, 23-25 September 2013) and the ATM/AIM/SAR SG/13 (Cairo, 30 September – 3 October 2013).

2.8 The CNS/ATM/IC SG/7 meeting was apprised of the outcome of the Middle East Airspace Users and Stakeholder Engagement (MEAUSE) Initiative, which aimed to gather data and conduct analyses of ANSPs, Airspace Users and stakeholders' requirements and future plans, through surveys. In this respect, it was noted that two surveys were launched under the MEAUSE initiative during 2013 to gauge the current and future ATM/CNS technology capabilities for ANSPs and Users' requirements and expectations. Accordingly, the meeting agreed that the results and analyses of the MEAUSE surveys, should be taken into consideration during the review/update of the MID Air Navigation Strategy.

2.9 Based on all of the foregoing, the CNS/ATM/IC/SG/7 meeting reviewed and updated the MID Region Air Navigation Strategy and agreed to the following Draft Conclusions:

*DRAFT CONCLUSION 7/1: MID REGION AIR NAVIGATION PRIORITIES*

*That, the MID Region Air Navigation Performance Framework be based on the implementation of the following Block 0 Modules, as a priority: APTA, SURF, FICE, DAIM, AMET, FRTO, CDO and CCO.*

*DRAFT CONCLUSION 7/2: MID REGION AIR NAVIGATION STRATEGY*

*That,*

- a) the MID Region Air Navigation Strategy at Appendix 4A to the Report on Agenda Item 4 be adopted; and*
- b) MID States be urged to:*
  - i. develop their National Air Navigation Performance Framework, ensuring the alignment with and support to the MID Region Air Navigation Strategy;*
  - ii. incorporate the agreed MID Region Performance Metrics into their National performance monitoring process; and*
  - iii. report relevant data necessary for performance monitoring of the Air Navigation Systems to the ICAO MID Regional Office, on annual basis, with a view to monitor the MID Region Key Performance Indicators.*

2.10 The meeting agreed that the ICAO MID Regional Office is to issue a State Letter along with detailed questionnaire requesting States and all stakeholders to review the Draft MID Air Navigation Strategy, and provide comments/inputs to the ICAO MID Regional Office before **15 November 2013**, in order to be taken into consideration when finalising the version to be presented to MIDANPIRG/14 for endorsement.

2.11 In connection with the above the Secretariat developed the questionnaire at **Appendix A** to this working paper, which was sent along with the Draft MID Air Navigation Strategy through State letter Ref.: AN 1/7– 13/264 dated 22 October 2013 to seek States comments/inputs as requested by the CNS/ATM/IC SG/7 meeting. Replies have been received from Four (4) States (Bahrain, Egypt, Jordan and Qatar).

2.12 The CNS/ATM/IC SG/7 meeting emphasized that collaboration and cooperation between all stakeholders to achieve the expected results and avoid duplication of efforts (i.e: different surveys, analyses, etc by ICAO, IATA, CANSO, etc) is a necessity. In addition, it was highlighted that in the future the process of collection of data from States and users (through questionnaires, State Letters, etc), should be driven by the agreed priorities. Furthermore, it was highlighted that some States have not yet developed/updated their National Air Navigation Performance Framework and close coordination with ICAO, IATA, CANSO, ACI, etc, might be needed to achieve this goal in an effective and timely manner.

2.13 Based on the above, the meeting agreed to the following Draft Conclusion:

<b>Why</b>	To improve the efficiency of air navigation at national and regional level, in accordance with the MID Air Navigation Strategy.
<b>What</b>	Assistance to States for the development/update of National Air Navigation Performance Framework
<b>Who</b>	ICAO MID Office, Stakeholders and concerned MID States
<b>When</b>	31 December 2014

***DRAFT CONCLUSION 7/3: ASSISTANCE FOR THE DEVELOPMENT/ UPDATE OF THE NATIONAL AIR NAVIGATION PERFORMANCE FRAMEWORK***

*That, ICAO, in coordination with concerned States and Stakeholders (IATA, CANSO, ACI, etc):*

- a) develop a plan for joint missions to identified States to support the development/update of the National Air Navigation Performance Framework in an effective and timely manner; and*
- b) agree on the priorities and plans of action to be reflected in the National Air Navigation Performance Framework to improve the efficiency of air navigation at national and regional level, in accordance with the MID Air Navigation Strategy.*

2.14 The meeting may wish to note that the second meeting of the eANP Working Group (eANP WG/2) was held in ICAO HQ in Montreal, Canada, from 18 to 22 November 2013. The meeting agreed that a Table should be developed for inclusion in Part I of Volume III to define a minimum set of High-Level Implementation Indicator(s) for each of the 18 ASBU Block 0 Modules and include other information, as deemed necessary, for use by all the ICAO Regions. It was agreed that the High-Level Implementation Indicators would be selected based on the SMART criteria (Specific, Measurable, Achievable, Relevant and Time bound). A draft which will be further reviewed and finalized by end of January 2014 is attached as **Appendix B**. The meeting agreed that the details related to the monitoring of the ASBU Modules, including the design of supporting enablers (tables/databases) should be left to the Regions/PIRGs.

2.15 Based on all of the foregoing, MIDANPIRG is required to agree, as first step, on the prioritization of the ASBU Block 0 Modules. It is to be emphasized that the initial prioritization would not signify that the rest of the modules could not be assigned higher urgency by specific States based on the local operational requirements. It would also not mean that the rest of the modules would be given lower importance by ICAO in pursuing standardization activities. In the same vein, it's to be highlighted that the ASBU Implementation Plan should be a living document to be reviewed and updated on regular basis. The future objectives would be to include all 18 B0 Modules and gradually B1 Modules, for regional planning, reporting and monitoring mechanisms, as part of the future revisions.

2.16 The initial version of the MID Region Air Navigation Strategy/ASBU implementation Plan would cater for the reporting period of 2013-2014 and would enable the MID Region to provide the first consolidated report to ICAO HQ by April 2014.

2.17 Taking into consideration the outcome of the CNS/ATM/IC SG/7 meeting, the eANP-WG/2 meeting and the feedback received from States and Users, the ASBU Block 0 Modules prioritization Table and Draft MID Air Navigation Strategy at **Appendices C and D**, respectively are proposed for endorsement by MIDANPIRG/14. Accordingly, the meeting is invited to agree on the following Draft Conclusions:

<b>Why</b>	Regional planning, reporting and monitoring mechanisms
<b>What</b>	MID Region Air Navigation Priorities
<b>Who</b>	MIDANPIRG/14
<b>When</b>	19 December 2013

***DRAFT CONCLUSION 14/XX: MID REGION AIR NAVIGATION PRIORITIES***

*That,*

- a) *the ASBU Block 0 Modules prioritization Table at **Appendix C** be endorsed as the initial version of the MID ASBU Implementation Plan; and*
- b) *the ASBU Block 0 Modules prioritization Table be reviewed on regular basis and be extended to cover Block 1 Modules, as appropriate.*

<b>Why</b>	To establish priorities and targets for air navigation and identification of necessary measures/action plans to reach the agreed air navigation targets
<b>What</b>	Draft MID Air Navigation Strategy
<b>Who</b>	MIDANPIRG/14 and MID States
<b>When</b>	19 December 2013/31 December 2014

**DRAFT CONCLUSION 14/XX: DRAFT MID REGION AIR NAVIGATION STRATEGY**

*That,*

- a) *the Draft MID Region Air Navigation Strategy at **Appendix 4.IX** to the Report on Agenda Item 4.1 be:*
  - i. *endorsed as the initial version of the MID Region Air Navigation Strategy; and*
  - ii. *further reviewed and completed by the different MIDANPIRG subsidiary bodies*
- b) *MID States be urged to:*
  - i. *develop their National Air Navigation Performance Framework, ensuring the alignment with and support to the MID Region Air Navigation Strategy;*
  - ii. *incorporate the agreed MID Region Performance Metrics into their National reporting and monitoring mechanisms; and*
  - iii. *provide the ICAO MID Regional Office, on annual basis, with relevant data necessary for regional air navigation planning and monitoring.*

2.18 The meeting may wish to note that an ASBU implementation Workshop will be jointly organised by IATA and ICAO and hosted by Emirates Airlines in Dubai, 18 – 22 May 2014. The Workshop will bring together all air navigation stakeholders including, States, Regulators, ANS Service Providers, aerodrome operators, International Organizations, aircraft operators and industry, to review and update the Draft MID Air Navigation Strategy, including the agreement on the air navigation performance targets, development of associated action plans and implementation Roadmap for CNS/ATM; based on the ASBU methodology, users' requirements, major traffic flows, cost effectiveness, and global and regional objectives/priorities.

**3. ACTION BY THE MEETING**

3.1 The meeting is invited to:

- a) review, update as appropriate and endorse the ASBU Block 0 Modules prioritization Table at **Appendix C** and Draft MID Air Navigation Strategy at **Appendix D** to this working paper;
- b) endorse the Draft Conclusions at para. 2.13 and 2.17;
- c) encourage States facing difficulty to develop/update their National Air Navigation Performance Framework to request ICAO MID Regional Office's assistance; and
- d) encourage States and all Stakeholders to actively participate in the ASBU implementation Workshop (Dubai, UAE, 18-22 May 2014).

-----

STATE:

Date:

Contact Person:

Name:

Title:

email:

### **MID Region Air Navigation Strategy Questionnaire**

The Third meeting of the MIDANPIRG Steering Group (MSG/3), Cairo, 17-19 June 2013, developed a draft MID Air Navigation Strategy, which was further reviewed and updated by the Seventh meeting of the CNS/ATM/IC SG/7, Cairo, Egypt, 07–09 October 2013. The CNS/ATM/IC SG/7 meeting agreed to the following Draft Conclusion:

**DRAFT CONCLUSION 7/1: MID REGION AIR NAVIGATION PRIORITIES**  
*That, the MID Region Air Navigation Performance Framework be based on the implementation of the following Block 0 Modules, as a priority: APTA, SURF, FICE, DATM, AMET, FRTO, CDO and CCO.*

The below questionnaire is prepared to collect the necessary inputs/comments to support the completion of the MID Air Navigation Strategy.

Based on the provided inputs/comments by States, the MID Region Air Navigation Strategy will be updated to reflect the requirements for the applicability, target date, performance indicator and the action plans needed for the implementation of the above mentioned ASBU Block 0 Modules in the MID Region.

#### *EXPLANATION OF THE TABLE:*

- 1- ASBU Block 0 Module name;
- 2- Questions related to the elements agreed for inclusion in the MID Air Navigation Strategy for which data need to be collected. Kindly, provide your answers in the space provided below each question;  
and
- 3- Your State action plans to implement the relevant ASBU Modules elements

#### *REFERENCES*

- ASBU Document: <http://www.icao.int/sustainability/Pages/ASBU-Framework.aspx>
- Draft MID Air Navigation is attached to the State letter Ref.: AN 1/7-13/260 dated 14 October 2013.

**1- B0 – APTA: Optimization of Approach Procedures including vertical guidance**

<b>2- Questions related to Applicability, Indicators/metrics and Target dates</b>	<b>3-Provide Action Plan for</b>
<p>Q1. <i>Provide the Total Number of instrument runways ends in your State:</i></p> <p>Q2. <i>Provide the Number of instrument runways ends provided with GNSS Approach Procedures (LNAV):</i></p> <p>Q3. <i>Provide completion date for the implementation of LNAV for all instrument runway ends:</i></p>	<p><i>LNAV implementation for all instrument runway ends in your State:</i></p>
<p>Q4. <i>Provide the Number of instrument runways ends provided with GNSS Approach Procedures with vertical guidance (LNAV/VNAV) :</i></p> <p>Q5. <i>Provide completion date for the implementation of LNAV/VNAV for all instrument runway ends:</i></p>	<p><i>LNAV/VNAV implementation for all instrument runway ends in your State:</i></p>
<p>Q6. <i>Indicate the instrument runways ends where you are planning to implement precision approach using Ground based augmentation Landing System (GLS) and when:</i></p>	<p><i>GLS implementation in your State:</i></p>



**1- B0-SURF: Safety and Efficiency of Surface Operations (A-SMGCS Level 1-2)**

**2- Questions related to Applicability, Indicators/metrics and Target dates**

**3- Provide Action Plan for**

The below questions are related to the A-SMGCS components as described in ICAO DOC 9830:

Q7. *Indicate international aerodromes where you have implemented Surface Surveillance:*

Q8. *Indicate international aerodromes where you have implemented Surface Surveillance with addition of at least one cooperative surface surveillance system (ADS-B, multilateration, Secondary Surveillance radar Mode S)*

Q9. *Does your system have the Conflict prediction and/or detection capability?*

Q10. *Indicate international aerodromes with painted taxiway center line and guidance signs:*

Q11. *Indicate international aerodromes with fixed taxiway center line lights:*

Q12. *Indicate international aerodromes where the vehicles accessing the movement area are equipped with cooperative transponder system:*

Q13. *Provide the list of international aerodromes where A-SMGCS (Level 1 or 2) has been implemented or will be implemented and when:*

*A-SMGCS (Level 1 or 2) implementation:*

<b>1- B0 – FICE: Increased Interoperability, Efficiency and Capacity through Ground-Ground Integration</b>	
<b>2- Questions related to Applicability, Indicators/metrics and Target dates</b>	<b>3- Provide Action Plan for</b>
<p><i>Q14. Have your State implemented AMHS? If not provide the planned date?</i></p> <p><i>Q15.. Indicate with which adjacent ACC(s) you have implemented AIDC/OLDI:</i></p> <p><i>Q16. Provide completion date for the implementation of AIDC/OLDI with all adjacent State ACC(s):</i></p>	<p><i>AIDC/OLDI implementation between your State ACC(s) and Adjacent ACCs:</i></p>

<b>1- B0 – DATM: Service Improvement through Digital Aeronautical Information Management</b>	
<b>2- Questions related to Applicability, Indicators/metrics and Target dates</b>	<b>3- Provide Action Plan for</b>
Q17. <i>Provide completion date for the implementation of AIXM-based Integrated Aeronautical Information Database (IAID):</i>	<i>AIXM-based Integrated Aeronautical Information Database (IAID) implementation:</i>
Q18. <i>Provide completion date for the implementation of IAID driven AIP Production (eAIP):</i>	<i>eAIP implementation:</i>
Q19. <i>Provide completion date for the implementation of QMS for AIS/AIM:</i>	<i>QMS for AIS/AIM implementation:</i>
Q20. <i>Provide completion date for the implementation of WGS-84 for Enroute:</i>	<i>WGS-84 implementation:</i>
Q21. <i>Provide completion date for the implementation of WGS-84 for Terminal:</i>	
Q22. <i>Provide completion date for the implementation of WGS-84 for Aerodromes:</i>	
Q23. <i>Provide completion date for the implementation of Geoid Undulation:</i>	
Q24. <i>Provide completion date for the implementation of (eTOD) for Areas 1, 2, 3 and 4:</i>	
Q25. <i>When are you planning to implement Digital NOTAM?</i>	<i>Digital NOTAM Implementation:</i>

<b>1- B0 – AMET: Meteorological information supporting enhanced operational efficiency and safety</b>	
<b>2- Questions related to Applicability, Indicators/metrics and Target dates</b>	<b>3- Provide Action Plan for</b>
Q26. Provide completion date for the implementation of SADIS 2G satellite broadcast:	SADIS 2G satellite broadcast implementation:
Q27. Provide completion date for the implementation of Secure SADIS ETP service:	Secure SADIS ETP service implementation:

<b>1- B0 – FRTO: Improved Operations through Enhanced En-Route Trajectories</b>	
<b>2- Questions related to Applicability, Indicators/metrics and Target dates</b>	<b>3- Provide Action Plan for</b>
Q28. Have your State implemented the Flexible Use of Airspace (FUA) Concept? If yes, list the segregated areas where the FUA is implemented; and the ATS Routes overflying these segregated areas:	FUA implementation:
Q29. Identify the segregated areas where the FUA would be implemented:	

<b>1- B0-CDO: Improved Flexibility and Efficiency in Descent Profiles Continuous Decent Operations(CDO)</b>	
<b>2- Questions related to Applicability, Indicators/metrics and Target dates</b>	<b>3- Provide Action Plan for</b>
<p>Q30. <i>List the Aerodromes with PBN STARs implemented:</i></p> <p>Q31. <i>Provide completion date for the implementation of PBN STARs at all your International Aerodromes:</i></p> <p>Q32. <i>What is your plan for CDO implementation? Indicate where (Aerodromes/TMAs) and when it will be implemented:</i></p>	<p><i>PBN STARs and CDO implementation in your State:</i></p>

<b>1- B0- CCO: Improved Flexibility and Efficiency Departure Profiles - Continuous Climb Operations (CCO)</b>	
<b>2- Questions related to Applicability, Indicators/metrics and Target dates</b>	<b>3- Provide Action Plan for</b>
<p>Q33. <i>List the Aerodromes with PBN SIDs implemented:</i></p> <p>Q34. <i>Provide completion date for the implementation of PBN SIDs at all your International Aerodromes:</i></p> <p>Q35. <i>What is your plan for CCO implementation? Indicate where (Aerodromes/TMAs) and when it will be implemented:</i></p>	<p><i>PBN SIDs and CCO implementation in your State:</i></p>

-----

**TABLE FOR INCLUSION IN PART I OF eANP VOLUME III  
HIGH-LEVEL IMPLEMENTATION INDICATOR(S) FOR EACH ASBU BLOCK 0 MODULE**

**Explanation of the Table**

- 1 Block 0 Module Code  
 2 Block 0 Module Title  
 3 Applicability area: *Region, Sub-region, List of States/FIRs and/or international aerodromes where the Block 0 Module is applicable.*  
 4 Priority: *To be defined by each PIRG/Region*  
 5 High level Implementation Indicator  
 6 Remarks: *Additional information as deemed necessary.*

<b>Module Code</b>	<b>Module Title</b>	<b>Applicability area</b>	<b>Priority</b>	<b>High level Implementation Indicator</b>	<b>Remarks</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>
B0-APTA	Optimization of Approach Procedures including vertical guidance			% of international aerodromes having at least one instrument runway provided with APV with Baro VNAV procedure implemented	
B0-WAKE	Increased Runway Throughput through Optimized Wake Turbulence Separation			% of applicable international aerodromes having implemented increased runway throughput through optimized wake turbulence separation	List of ADs to be established through regional air navigation agreement.
B0-RSEQ	Improve Traffic flow through Runway Sequencing (AMAN/DMAN)			% of applicable international aerodromes having implemented AMAN / DMAN	List of ADs to be established through regional air navigation agreement.

<b>Module Code</b>	<b>Module Title</b>	<b>Applicability area</b>	<b>Priority</b>	<b>High level Implementation Indicator</b>	<b>Remarks</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>
B0-SURF	Safety and Efficiency of Surface Operations (A-SMGCS Level 1-2)			% of applicable international aerodromes having implemented A-SMGCS Level 2	List of ADs to be established through regional air navigation agreement.
B0-ACDM	Improved Airport Operations through Airport-CDM			% of applicable international aerodromes having implemented improved airport operations through airport-CDM	List of ADs to be established through regional air navigation agreement.
B0-FICE	Increased Interoperability, Efficiency and Capacity through Ground-Ground Integration			% of FIRs within which all applicable ACCs have implemented at least one interface to use AIDC / OLDI with neighbouring ACCs	
B0-DATM	Service Improvement through Digital Aeronautical Information Management			- % States having implemented an integrated aeronautical information database - % States having implemented QMS	
B0-AMET	Meteorological information supporting enhanced operational efficiency and safety			- % of States having implemented SADIS / WIFS - % of States having implemented QMS	
B0-FRTO	Improved Operations through Enhanced En-Route Trajectories			% of FIRs in which FUA is implemented	
B0-NOPS	Improved Flow Performance through Planning based on a Network-Wide view			% of FIRs within which all ACCs utilize ATFM systems	
B0-ASUR	Initial capability for ground surveillance			% of international aerodromes where ADS-B or SSR or MLAT are implemented for ground	

Module Code	Module Title	Applicability area	Priority	High level Implementation Indicator	Remarks
1	2	3	4	5	6
				surveillance	
B0-ASEP	Air Traffic Situational Awareness (ATSA)			% of States having implemented air traffic situational awareness	
B0-OPFL	Improved access to optimum flight levels through climb/descent procedures using ADS-B			% of FIRs having implemented in-trail procedures	
B0-ACAS	ACAS Improvements			% of aircraft equipped with TCAS v 7.1	
B0-SNET	Increased Effectiveness of Ground-Based Safety Nets			% of States having implemented ground-based safety-nets (STCA, APW, MSAW, etc.)	
B0-CDO	Improved Flexibility and Efficiency in Descent Profiles (CDO)			- % of international aerodromes / TMA's with PBN STAR implemented - % of international aerodromes where CDO is implemented	
B0-TBO	Improved Safety and Efficiency through the initial application of Data Link En-Route			% of FIRs having implemented data link en-route	
B0-CCO	Improved Flexibility and Efficiency Departure Profiles - Continuous Climb Operations (CCO)			- % of international aerodromes / TMA's with PBN SID implemented - % of international aerodromes where CCO is implemented	

-----



**MID REGION ASBU BLOCK 0 MODULES PRIORITIZATION TABLE**

Module Code	Module Title	Priority	High level Implementation Indicator	Remarks
B0-APTA	Optimization of Approach Procedures including vertical guidance	1	% of international aerodromes having at least one instrument runway provided with APV with Baro VNAV procedure implemented	
B0-WAKE	Increased Runway Throughput through Optimized Wake Turbulence Separation	2	% of applicable international aerodromes having implemented increased runway throughput through optimized wake turbulence separation	List of applicable ADs to be established through regional air navigation agreement.
B0-RSEQ	Improve Traffic flow through Runway Sequencing (AMAN/DMAN)	2	% of applicable international aerodromes having implemented AMAN / DMAN	List of applicable ADs to be established through regional air navigation agreement.
B0-SURF	Safety and Efficiency of Surface Operations (A-SMGCS Level 1-2)	1	% of applicable international aerodromes having implemented A-SMGCS Level 2	List of applicable ADs to be established through regional air navigation agreement.
B0-ACDM	Improved Airport Operations through Airport-CDM	2	% of applicable international aerodromes having implemented improved airport operations through airport-CDM	List of applicable ADs to be established through regional air navigation agreement.
B0-FICE	Increased Interoperability, Efficiency and Capacity through Ground-Ground Integration	1	% of FIRs within which all applicable ACCs have implemented at least one interface to use AIDC / OLDI with neighbouring ACCs	
B0-DATM	Service Improvement through Digital Aeronautical Information Management	1	- % States having implemented an intergrated aeronautical information database - % States having implemented QMS	
B0-AMET	Meteorological information supporting enhanced operational efficiency and safety	1	- % of States having implemented SADIS / WIFS - % of States having implemented QMS	

Module Code	Module Title	Priority	High level Implementation Indicator	Remarks
B0-FRTO	Improved Operations through Enhanced En-Route Trajectories	1	% of FIRs in which FUA is implemented	
B0-NOPS	Improved Flow Performance through Planning based on a Network-Wide view	2	% of FIRs within which all ACCs utilize ATFM systems	
B0-ASUR	Initial capability for ground surveillance	2	% of international aerodromes where ADS-B or SSR or MLAT are implemented for ground surveillance	
B0-ASEP	Air Traffic Situational Awareness (ATSA)	2	% of States having implemented air traffic situational awareness	
B0-OPFL	Improved access to optimum flight levels through climb/descent procedures using ADS-B	1*	% of FIRs having implemented in-trail procedures	
B0-ACAS	ACAS Improvements	1*	% of aircraft equipped with TCAS v 7.1	
B0-SNET	Increased Effectiveness of Ground-Based Safety Nets	2	% of States having implemented ground-based safety-nets (STCA, APW, MSAW, etc.)	
B0-CDO	Improved Flexibility and Efficiency in Descent Profiles (CDO)	1*	- % of international aerodromes / TMAs with PBN STAR implemented - % of international aerodromes where CDO is implemented	
B0-TBO	Improved Safety and Efficiency through the initial application of Data Link En-Route	1*	% of FIRs having implemented data link en-route	
B0-CCO	Improved Flexibility and Efficiency Departure Profiles - Continuous Climb Operations (CCO)	1*	- % of international aerodromes / TMAs with PBN SID implemented - % of international aerodromes where CCO is implemented	

**Notes:**

**Priority 1:** Modules that have the highest contribution to the improvement of air navigation safety and/or efficiency in the MID Region. These modules should be implemented where applicable and will be used for the purpose of regional air navigation monitoring and reporting for the period 2013-2014.

**Priority 2:** Modules recommended for implementation based on identified operational needs and benefits.

\*Priority to be reconsidered by MIDANPIRG/14

-----

**MID Region Air Navigation Strategy**



## Table of Contents

- Strategic Air Navigation Capacity and efficiency Objective
- Background
- Stakeholders Roles and Responsibilities
- Introduction
- Aviation System Block Upgrade (ASBU) Framework
- MID Air Navigation Objectives
  - Near Term Objective
  - Mid Term Objective
  - Long Term Objective
- ASBU Modules prioritization/objectives for MID Region
- Measuring and monitoring air navigation performance
- Action Plans
- Governance

DRAFT

## MID Region Air Navigation Strategy

### Strategic Air Navigation Capacity and Efficiency Objective:

To realize sound and economically-viable civil aviation system in the MID Region that continuously increases in capacity and improves in efficiency with enhanced safety, security and facilitation while minimizing the adverse environmental effects of civil aviation activities.

### Background

The Global ATM Operational Concept was approved by the Eleventh Air Navigation Conference (Montreal, September-October 2003) and published as Doc. 9854-AN/458.

In order to align global planning to the ATM Operational Concept, the Eleventh Air Navigation Conference (AN-Conf/11), recommended States and Regional Planning and Implementation Groups (PIRG), through Recommendation 1/1, to consider the Concept as a common global framework to guide in the planning for the implementation of the systems in support of the air navigation services.

The 37th Session of the International Civil Aviation Organization (ICAO) General Assembly (2010) directed the Organization to double its efforts to meet the global needs for airspace interoperability while maintaining its focus on safety. The Aviation System Block Upgrades (ASBU) methodology was formalized at the Twelfth Air Navigation Conference (AN-Conf/12) (Montreal, November 2012) and is part of the new GANP, 4th Edition (Doc 9750) available at [http://www.icao.int/Meetings/a38/Documents/GANP\\_en.pdf](http://www.icao.int/Meetings/a38/Documents/GANP_en.pdf)

The block upgrades describe a way to apply the concepts defined in the GANP with the goal of implementing regional performance improvements. They include the development of technology roadmaps, to ensure that standards are mature and to facilitate synchronized implementation between air and ground systems and between regions. The ultimate goal is to achieve global interoperability. Safety demands this level of interoperability and harmonization but it must be achieved at a reasonable cost with commensurate benefits.

Through Recommendation 6/1 - *Regional performance framework – planning methodologies and tools*, AN-Conf/12 urged States and PIRGs to harmonize the regional and national air navigation plans with the ASBU methodology in response to this, the MID region is developing MID Region Air Navigation Strategy that is aligned with the ASBU methodology.

### Stakeholders Roles and Responsibilities

Stakeholders including service providers, regulators, airspace users and manufacturers are facing increased levels of interaction as new, modernized ATM operations are implemented. The highly integrated nature of capabilities covered by the block upgrades requires a significant level of coordination and cooperation among all stakeholders. Working together is essential for achieving global harmonization and interoperability.

With the ASBU methodology States, operators and industry will benefit from the availability of Standards and Recommended Practices (SARPs) with realistic lead times. This will enable regional regulations to be identified, allowing for the development of adequate action plans and, if needed, investment in new facilities and/or infrastructure.

For the industry, this constitutes a basis for planning future development and delivering products on the market at the proper target time. For service providers or operators, ASBU should serve as a planning tool for resource management, capital investment, training as well as potential reorganization.

### Introduction

As traffic volume increases throughout the world, the demands on air navigation service providers in a given airspace increase, and air traffic management becomes more complex. Increased traffic density brings about an increase in the number of flights that cannot fly their optimum path.

It is foreseen that the implementation of the components of the ATM operational concept will provide sufficient capacity to meet the growing demand, generating additional benefits in terms of more efficient flights and higher levels of safety. Nevertheless, the potential of new technologies to significantly reduce the cost of services will require the establishment of clear operational requirements.

Taking into account the benefits of the ATM operational concept, it is necessary to make many timely decisions for its implementation. An unprecedented cooperation and harmonization will be required at both global and regional level.

ICAO introduced the Aviation System Block Upgrades (ASBU) methodology as a systemic manner to achieve a harmonized implementation of the air navigation services.

With the introduction of the ASBU the Performance Framework Forms (PFF) are restructured and aligned with the ASBU modules, and renamed as Air Navigation Report Forms (ANRF) and presents a standard format for high level monitoring of the ASBU module implementation, where as detailed monitoring of the implementation will be developed in Volume III of the revised new Regional Air Navigation Plans.

### **Aviation System Block Upgrades (ASBU) Framework**

An ASBU designates a set of improvements that can be implemented globally from a defined point in time to enhance the performance of the ATM system. There are four components of a block upgrade.

Module – is a deployable package (performance) or capability. A module will offer an understandable performance benefit, related to a change in operations, supported by procedures, technology, regulations/standards as necessary, and a business case. A module will be also characterized by the operating environment within which it may be applied. The date allocated to a module in a block is that of the initial operating capability.

Of some importance is the need for each of the modules to be both flexible and scalable to the point where their application could be managed through any set of regional plans and still realize the intended benefits. The preferential basis for the development of the modules relied on the applications being adjustable to fit many regional needs as an alternative to being made mandated as a one-size-fits-all application. Even so, it is clear that many of the modules developed in the block upgrades will not be necessary to manage the complexity of air traffic management in many parts of the world.

Thread – describes the evolution of a given capability through the successive block upgrades, from basic to more advanced capability and associated performance, while representing key aspects of the global ATM concept

Block – is made up of modules that when combined enable significant improvements and provide access to benefits.

The notion of blocks introduces a form of date segmentation in five year intervals. However, detailed considerations will call for more accurate implementation dates, often not at the exact assigned block date. The purpose is not to indicate when a module implementation must be completed unless dependencies among modules logically suggest such a completion date.

Performance improvement area (PIA) – sets of modules in each block are grouped to provide operational and performance objectives in relation to the environment to which they apply, thus forming an executive view of the intended evolution. The PIAs facilitate comparison of on-going programmes.

The four PIAs are as follows:

- a) airport operations;
- b) globally interoperable systems and data – through globally interoperable system-wide information management;
- c) optimum capacity and flexible flights – through global collaborative ATM; and
- d) efficient flight paths – through trajectory-based operations.

Figure 1 illustrates the relationships between the modules, threads, blocks, and PIAs.

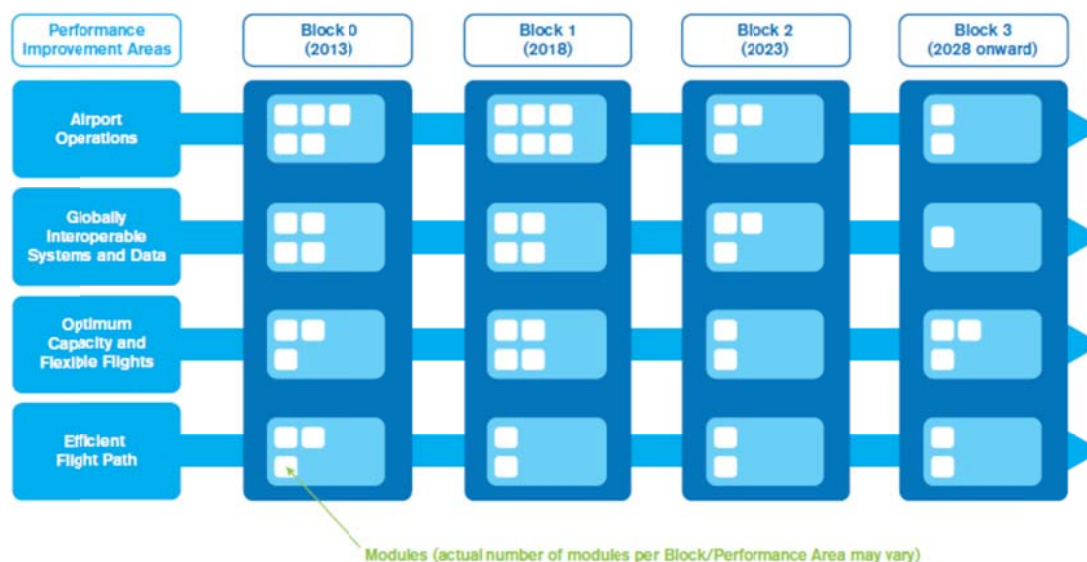


Figure 1.

### MID Air Navigation Objectives:

States must focus on their Air Navigation Capacity and Efficiency priorities as they continue to foster expansion of the air transport sectors.

The ICAO Global Air Navigation Plan (GANP) represents a rolling strategic methodology which leverages existing technologies and anticipates future developments based on State/industry agreed operational objectives. The Block Upgrades are organized in five-year time increments starting in 2013 and continuing through 2028 and beyond. This structured approach provides a basis for sound investment strategies and will generate commitment from States, equipment manufacturers, operators and service providers.

The Global Plan offers a long-term vision that will assist ICAO, States and industry to ensure continuity and harmonization among their modernization programmes. It also explores the need for more integrated aviation planning at both the regional and State level and addresses required solutions by introducing Aviation System Block Upgrade (ASBU) methodology.

The MID Region air navigation objectives are in line with the global air navigation objectives and address specific air navigation operational improvements identified within the framework of the Middle East Regional Planning and Implementation Group (MIDANPIRG).

The enhancement of communication and information exchange between aviation Stakeholders and their active collaboration under the framework of MIDANPIRG would help achieving the MID Region Air Navigation objectives in an expeditious manner.

### *Near-term Objective (2013 - 2018): ASBU Block 0*

The Fourth Edition of the *Global Air Navigation Plan* introduces ICAO's ASBU methodology and supporting technology roadmaps based on a rolling fifteen-year planning horizon. Although the GANP has a global perspective, it is not intended that all ASBU modules are to be applied around the globe. Some of the ASBU modules contained in the GANP are specialized packages that should be applied where specific operational requirements or corresponding benefits exist.



Although some modules are suitable for entirely stand-alone deployment, an overall integrated deployment of a number of modules could generate additional benefits. The benefits from an integrated implementation of a number of modules may be greater than the benefits from a series of isolated implementations. Similarly, the benefits from the coordinated deployment of one module simultaneously across a wide area (e.g. a number of proximate airports or a number of contiguous airspaces/flight information regions) may exceed the benefits of the implementations conducted on an ad hoc or isolated basis.

An example of a need for global applicability would be performance-based navigation (PBN). Assembly Resolution A37-11 urges all States to implement approach procedures with vertical guidance in accordance with the PBN concept. Therefore, the ASBU modules on PBN approaches should be seen as required for implementation at all airports. In the same way, some modules are well suited for regional or sub-regional deployment and should take this into account when considering which modules to implement regionally and in what circumstances and agreed timeframes.

Block '0' features Modules characterized by operational improvements which have already been developed and implemented in many parts of the world today. It therefore has a near-term implementation period of 2013–2018, whereby 2013 refers to the availability of its particular performance Modules and 2018 the target implementation deadline. It is not the case that all States will need to implement every Module, and ICAO will be working with its Members to help each determine exactly which capabilities they should have in place based on their unique operational requirements.

The MID Region Air Navigation Strategy is aimed to maintain regional harmonisation. The States should develop their national performance framework, including action plans for the implementation of relevant ASBU Modules.

It is important to clarify how each ASBU module fits into the framework of the MID Regional Air Navigation system.

***Mid-term Objective (2018 - 2023): ASBU Block 1***

Block 0 features Modules characterized by technologies and capabilities which have already been developed and implemented in many parts of the world today. It therefore features a near-term availability milestone, or Initial Operating Capability (IOC), of 2013 based on regional and State operational need. Blocks 1 through 3 are characterized by both existing and projected performance area solutions, with availability milestones beginning in 2018, 2023 and 2028 respectively.

Associated timescales are intended to depict the initial deployment targets along with the readiness of all components needed for deployment. It must be stressed that a Block's availability milestone is not the same as a deadline.

***Long-term Objective (2023 - 2028): ASBU Block 2***

The Block Upgrades incorporate a long-term perspective matching that of the three companion ICAO Air Navigation planning documents. They coordinate clear aircraft- and ground-based operational objectives together with the avionics, data link and ATM system requirements needed to achieve them. The overall strategy serves to provide industry wide transparency and essential investment certainty for operators, equipment manufacturers and ANSPs.

**MID Region ASBU Block 0 Modules Prioritization**

On the basis of operational requirements and taking into consideration the associated benefits, MID Region has prioritized the implementation of the Block "0" Modules as in **Table 1**.

**Table 1: MID REGION ASBU BLOCK 0 MODULES PRIORITIZATION**

Performance Improvement Areas (PIA)	Performance Improvement Area Name	Module	Priority	Module Name
PIA 1	Airport Operations	B0-65 APTA	1	Optimization of Approach Procedures including vertical guidance
		B0-70 WAKE	2	Increased Runway Throughput through Optimized Wake Turbulence Separation
		B0-15 RSEQ	2	Improved Traffic Flow through Sequencing (AMAN/DMAN)
		B0-75 SURF	1	Safety and Efficiency of Surface Operations (A-SMGCS Level 1-2)
		B0-80 ACDM	2	Improved Airport Operations through Airport-CDM
PIA 2	Globally Interoperable Systems and Data - Through Globally Interoperable System Wide Information Management	B0-25 FICE	1	Increased Interoperability, Efficiency and Capacity through Ground-Ground Integration
		B0-30 DATM	1	Service Improvement through Digital Aeronautical Information Management
		B0-105 AMET	1	Meteorological information supporting enhanced operational efficiency and safety
PIA 3	Optimum Capacity and Flexible Flights – Through Global Collaborative ATM	B0-10 FRTO	1	Improved Operations through Enhanced En-Route Trajectories
		B0-35 NOPS	2	Improved Flow Performance through Planning based on a Network-Wide view
		B0-84 ASUR	2	Initial Capability for Ground Surveillance
		B0-85 ASEP	2	Air Traffic Situational Awareness (ATSA)
		B0-86 OPFL	1*	Improved access to Optimum Flight Levels through Climb/Descent Procedures using ADS-B
		B0- 101 ACAS	1*	ACAS Improvements
		B0-102 SNET	2	Increased Effectiveness of Ground-based Safety Nets
PIA 4	Efficient Flight Path – Through Trajectory-based Operations	B0-05 CDO	1*	Improved Flexibility and Efficiency in Descent Profiles (CDO)
		B0-TBO	1*	Improved Safety and Efficiency through the initial application of Data Link En-Route
		B0-20 CCO	1*	Improved Flexibility and Efficiency Departure Profiles - Continuous Climb Operations (CCO)

**Priority 1:** Modules that have the highest contribution to the improvement of air navigation safety and/or efficiency in the MID Region. These modules should be implemented where applicable and will be used for the purpose of regional air navigation monitoring and reporting for the period 2013-2014.

**Priority 2:** Modules recommended for implementation based on identified operational needs and benefits.

### **Measuring and monitoring air navigation Performance:**

The monitoring of air navigation performance and its enhancement is achieved through identification of relevant air navigation Metrics and Indicators as well as the adoption and attainment of air navigation system Targets.

The MID Region Air Navigation Performance Framework is based on the implementation of the Block 0 Modules shown in **Table 1** as a priority.

The MID Region air navigation Key Performance Indicators, Targets and Action Plans are detailed in the **Table 2** below.

*Note: The different elements supporting the implementation are explained in the ASBU Document, and Global Plan (Doc 9750)*

### **Action Plans:**

MIDANPIRG through its activities under the various subsidiary bodies will continue to develop, update and monitor the implementation of Action Plans to achieve the air navigation targets.

A progress report on the implementation of the Action Plans and achieved targets will be developed by the Air Navigation System Implementation Group (ANSIG) and presented to MIDANPIRG.

### **Governance:**

The MIDANPIRG will be the governing body responsible for the review and update of the MID Region Air Navigation Strategy.

The MID Region Air Navigation Strategy will guide the work of MIDANPIRG and all its member States and partners.

Progress on the implementation of the MID Region Air Navigation Strategy and the achievement of the agreed air navigation targets will be reported to the ICAO Air Navigation Commission (ANC), through the review of the MIDANPIRG reports; and to the stakeholders in the Region within the framework of MIDANPIRG.

-----



Table 2

**MONITORING OF THE AVIATION SYSTEM BLOCK UPGRADES (ASBUS)  
IMPLEMENTATION IN THE MID REGION**

*B0 – APTA: Optimization of Approach Procedures including vertical guidance*

**Description and purpose**

The use of performance-based navigation (PBN) and ground-based augmentation system (GBAS) landing system (GLS) procedures will enhance the reliability and predictability of approaches to runways, thus increasing safety, accessibility and efficiency. This is possible through the application of Basic global navigation satellite system (GNSS), Baro vertical navigation (VNAV), satellite-based augmentation system (SBAS) and GLS. The flexibility inherent in PBN approach design can be exploited to increase runway capacity.

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
Y	Y	Y	Y	Y

**Applicability consideration:**

This module is applicable to all instrument, and precision instrument runway ends, and to a limited extent, non-instrument runway ends.

*B0 – APTA: Optimization of Approach Procedures including vertical guidance*

<b>Elements</b>	<b>Applicability</b>	<b>Performance Indicators/Supporting Metrics</b>	<b>Targets</b>	<b>Action Plan</b>	<b>Remarks</b>
LNAV	All Instrument RWYs	Indicator: % of runway ends with GNSS Approach Procedures (LNAV)  Supporting metric: Number of instrument runways ends provided with GNSS Approach Procedures (LNAV)	All instrument runway ends, either as the primary approach or as a back-up for precision approaches by 2016	1) Consultation meetings jointly driven by IATA, CANSO, and ICAO  2) PBN Workshops in 2014  3) MPST Go-Team visits	
LNAV/VNAV	All Instrument RWYs	Indicator: % of instrument runways ends provided with Baro-VNAV approach procedures  Supporting metric: Number of instrument runways ends provided with Baro-VNAV approach procedures	All instrument runway ends, either as the primary approach or as a back-up for precision approaches by 2018	4) GNSS/GBAS Workshop in 2015  5) Pilot projects and trials	
Precision Approach using GLS	TBD	Indicator: % of runway ends with GLS  Supporting metric Number of runway ends with GLS			

**Module N° B0-SURF: Safety and Efficiency of Surface Operations (A-SMGCS Level 1-2)**

**Description and purpose**

Basic A-SMGCS provides surveillance and alerting of movements of both aircraft and vehicles on the aerodrome thus improving runway/aerodrome safety. ADS-B information is used when available (ADS-B APT).

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
Y	Y	Y	Y	Y

**Applicability consideration:**

A-SMGCS is applicable to any aerodrome and all classes of aircraft/vehicles. Implementation is to be based on requirements stemming from individual aerodrome operational and cost-benefit assessments. ADS-B APT, when applied is an element of A-SMGCS, is designed to be applied at aerodromes with medium traffic complexity, having up to two active runways at a time and the runway width of minimum 45 m.

<b>B0-SURF: Safety and Efficiency of Surface Operations (A-SMGCS Level 1-2)</b>					
<b>Elements</b>	<b>Applicability</b>	<b>Performance Indicators/Supporting Metrics</b>	<b>Targets</b>	<b>Action Plan</b>	<b>Remarks</b>
A-SMGCS Level 1	TBD	Indicator: % of international aerodromes with A-SMGCS Level 1  Supporting Metric: Number of international aerodromes with SMGCS Level I		1) Aerodrome technical missions jointly driven by IATA and ICAO  2) Airport infrastructure surveys	
A-SMGCS Level 2	TBD	Indicator: % of international aerodromes with A-SMGCS Level 2  Supporting Metric: Number of international aerodromes with A-SMGCS Level 2		3) consultation meetings jointly driven by IATA, CANSO, and ICAO	

***B0 – FICE: Increased Interoperability, Efficiency and Capacity through Ground-Ground Integration***

**Description and purpose**

To improve coordination between air traffic service units (ATSUs) by using ATS Interfacility Data Communication (AIDC) defined by the ICAO *Manual of Air Traffic Services Data Link Applications* (Doc 9694). The transfer of communication in a data link environment improves the efficiency of this process particularly for oceanic ATSUs.

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
N	Y	Y	N	Y

***Applicability consideration:***

Applicable to at least two area control centres (ACCs) dealing with enroute and/or terminal control area (TMA) airspace. A greater number of consecutive participating ACCs will increase the benefits.

***B0 – FICE: Increased Interoperability, Efficiency and Capacity through Ground-Ground Integration***

<b><i>Elements</i></b>	<b><i>Applicability</i></b>	<b><i>Performance Indicators/Supporting Metrics</i></b>	<b><i>Targets</i></b>	<b><i>Action Plan</i></b>	<b><i>Remarks</i></b>
AMHS implementation	<i>All States'</i>	Indicator: % of States with AMHS implemented  Supporting metric: Number of States with AMHS implemented			
AMHS interconnection	<i>All States'</i>	Indicator: % of States with AMHS interconnected with other States AMHS  Supporting metric: Number of States with AMHS interconnections implemented with other States AMHS			
Implementation of AIDC/OLDI between adjacent ACCs	<i>All ACCs</i>	Indicator: Percentage of ACCs with AIDC/OLDI systems implemented between adjacent ACCs  Supporting metric: Number of AIDC/OLDI interconnections implemented between adjacent ACCs			

***B0 – DATM: Service Improvement through Digital Aeronautical Information Management***

**Description and purpose**

The initial introduction of digital processing and management of information, through aeronautical information service (AIS)/aeronautical information management (AIM) implementation, use of aeronautical information exchange model (AIXM), migration to electronic aeronautical information publication (AIP) and better quality and availability of data

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
N	N	Y	Y	Y

***Applicability consideration:***

Applicable at State level, with increased benefits as more States participate

***B0 – DATM: Service Improvement through Digital Aeronautical Information Management***

<i>Elements</i>	<i>Applicability</i>	<i>Performance Indicators/Supporting Metrics</i>	<i>Targets</i>	<i>Action Plan</i>	<i>Remarks</i>
1-AIXM	<i>All States</i>	Indicator: % of States that have implemented an AIXM-based Integrated Aeronautical Information Database (IAID)  Supporting Metric: Number of States that have implemented an AIXM-based Integrated Aeronautical Information Database (IAID)			
2-eAIP	<i>All States</i>	Indicator: % of States that have implemented an IAID driven AIP Production (eAIP)  Supporting Metric: Number of States that have implemented an IAID driven AIP Production (eAIP)			
3-QMS	<i>All States</i>	Indicator: % of States that have implemented QMS for AIS/AIM  Supporting Metric: Number of States that have implemented QMS for AIS/AIM			



4-WGS-84	<i>All States</i>	<p>Indicator: % of States that have implemented WGS-84 for Enroute</p> <p>Supporting Metric: Number of States that have implemented WGS-84 for Enroute</p> <p>Indicator: % of States that have implemented WGS-84 for Terminal</p> <p>Supporting Metric: Number of States that have implemented WGS-84 for Terminal</p> <p>Indicator: % of States that have implemented WGS-84 for Aerodromes</p> <p>Supporting Metric: Number of States that have implemented WGS-84 for Aerodromes</p> <p>Indicator: % of States that have implemented Geoid Undulation</p> <p>Supporting Metric: Number of States that have implemented Geoid Undulation</p>			
5-eTOD	<i>All States</i>	<p>Indicator: % of States that have implemented required Terrain datasets</p> <p>Supporting Metric: Number of States that have implemented required Terrain datasets</p> <p>Indicator: % of States that have implemented required Obstacle datasets</p> <p>Supporting Metric: Number of States that have implemented required Obstacle datasets</p>			
6-Digital NOTAM*	<i>All States</i>	Plan for the implementation of Digital NOTAM			

***B0 – AMET: Meteorological information supporting enhanced operational efficiency and safety***

**Description and purpose**

Global, regional and local meteorological information:

- a) forecasts provided by world area forecast centres (WAFC), volcanic ash advisory centres (VAAC) and tropical cyclone advisory centres (TCAC);
- b) aerodrome warnings to give concise information of meteorological conditions that could adversely affect all aircraft at an aerodrome including wind shear; and
- c) SIGMETs to provide information on occurrence or expected occurrence of specific en-route weather phenomena which may affect the safety of aircraft operations and other operational meteorological (OPMET) information, including METAR/SPECI and TAF, to provide routine and special observations and forecasts of meteorological conditions occurring or expected to occur at the aerodrome.

This module includes elements which should be viewed as a subset of all available meteorological information that can be used to support enhanced operational efficiency and safety.

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
N	Y	Y	Y	Y

***Applicability consideration:***

Applicable to traffic flow planning, and to all aircraft operations in all domains and flight phases, regardless of level of aircraft equipage.

***B0 – AMET: Meteorological information supporting enhanced operational efficiency and safety***

<i>Elements</i>	<i>Applicability</i>	<i>Performance Indicators/Supporting Metrics</i>	<i>Targets</i>	<i>Action Plan</i>	<i>Remarks</i>
SADIS 2G satellite broadcast	<i>All States</i>	Indicator: % of States implemented SADIS 2G satellite broadcast  Supporting metric: : % of States implemented SADIS 2G satellite broadcast			
Secure SADIS FTP service	<i>All States</i>	Indicator: % of States implemented Secure SADIS FTP service  Supporting metric: % of States implemented Secure SADIS FTP service			

**B0 – FRT0: Improved Operations through Enhanced En-Route Trajectories**

**Description and purpose**

To allow the use of airspace which would otherwise be segregated (i.e. special use airspace) along with flexible routing adjusted for specific traffic patterns. This will allow greater routing possibilities, reducing potential congestion on trunk routes and busy crossing points, resulting in reduced flight length and fuel burn.

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
Y	Y	Y	Y	N/A

**Applicability consideration:**

Applicable to en-route and terminal airspace. Benefits can start locally. The larger the size of the concerned airspace the greater the benefits, in particular for flex track aspects. Benefits accrue to individual flights and flows. Application will naturally span over a long period as traffic develops. Its features can be introduced starting with the simplest ones.

**B0 – FRT0: Improved Operations through Enhanced En-Route Trajectories**

<i>Elements</i>	<i>Applicability</i>	<i>Performance Indicators/Supporting Metrics</i>	<i>Targets</i>	<i>Action Plan</i>	<i>Remarks</i>
Flexible use of airspace (FUA)	<i>All States</i>	Indicator: % of States implementing FUA  Supporting metric: number of States implementing FUA			Implementation should be based on the published aeronautical information
Flexible routing	<i>All States</i>	Indicator: % of established Routes overflying segregated airspace  Supporting metric: Number of established Routes overflying segregated airspace			Based on published aeronautical information

***B0 – OPFL: Improved Access to Optimum Flight Levels through Climb/Descent Procedures using ADS-B***

**Description and purpose**

This module enables an aircraft to reach a more satisfactory flight level for flight efficiency or to avoid turbulence for safety. The main benefit of ITP is significant fuel savings and the uplift of greater payloads.

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
N/A	Y	Y	Y	Y

***Applicability consideration:***

This can be applied to routes in procedural airspaces.

***B0 – OPFL: Improved Access to Optimum Flight Levels through Climb/Descent Procedures using ADS-B***

<b>Elements</b>	<b>Applicability</b>	<b>Performance Indicators/Supporting Metrics</b>	<b>Targets</b>	<b>Action Plan</b>	<b>Remarks</b>
Ground systems		Indicator: % of FIRs having implemented in-trail procedures  Supporting metric: Number of FIRs having implemented in-trail procedures			conflict probe logics be adapted to ITP separation minimum
Avionics					ADS-B IN capability

***B0 – ACAS: ACAS Improvements***

**Description and purpose**

To provide short-term improvements to existing airborne collision avoidance systems (ACAS) to reduce nuisance alerts while maintaining existing levels of safety. This will reduce trajectory deviations and increase safety in cases where there is a breakdown of separation

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
N/A	N/A	Y	N/A	Y

***Applicability consideration:***

Safety and operational benefits increase with the proportion of equipped aircraft.

***B0 – ACAS: ACAS Improvements***

<b>Elements</b>	<b>Applicability</b>	<b>Performance Indicators/Supporting Metrics</b>	<b>Targets</b>	<b>Action Plan</b>	<b>Remarks</b>
Avionics		Indicator: % of aircraft equipped with TCAS v 7.1 as applicable Supporting metric: Number of aircraft equipped with TCAS v 7.1 as applicable  1			

**B0 – CDO: Improved Flexibility and Efficiency in Descent Profiles (CDO)**

**Description and purpose**

To use performance-based airspace and arrival procedures allowing aircraft to fly their optimum profile using continuous descent operations (CDOs). This will optimize throughput, allow fuel efficient descent profiles and increase capacity in terminal areas.

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
N	Y	Y	Y	Y

**Applicability consideration:**

Regions, States or individual locations most in need of these improvements. For simplicity and implementation success, complexity can be divided into three tiers:

- a) least complex – regional/States/locations with some foundational PBN operational experience that could capitalize on near term enhancements, which include integrating procedures and optimizing performance;
- b) more complex – regional/States/locations that may or may not possess PBN experience, but would benefit from introducing new or enhanced procedures. However, many of these locations may have environmental and operational challenges that will add to the complexities of procedure development and implementation; and
- c) most complex – regional/States/locations in this tier will be the most challenging and complex to introduce integrated and optimized PBN operations. Traffic volume and airspace constraints are added complexities that must be confronted. Operational changes to these areas can have a profound effect on the entire State, region or location.

**B0 – CDO: Improved Flexibility and Efficiency in Descent Profiles (CDO)**

<i>Elements</i>	<i>Applicability</i>	<i>Performance Indicators/Supporting Metrics)</i>	<i>Targets</i>	<i>Action Plan</i>	<i>Remarks</i>
PBN STARS	TBD	Indicator: % of International Aerodromes/TMA with PBN STAR implemented  Supporting Metric: Number of International Aerodromes/TMAs with PBN STAR implemented			
International aerodromes/TMAs with CDO	TBD	Indicator: % of International Aerodromes/TMA with CDO implemented  Supporting Metric: Number of International Aerodromes/TMAs with CDO implemented		1) Pilot projects for CDOs 2) City-pair pilot projects for tailored arrivals 3) PBN Workshops	

***B0 –TBO: Improved Safety and Efficiency through the initial application of Data Link En-Route***

**Description and purpose**

To implement an initial set of data link applications for surveillance and communications in ATC, supporting flexible routing, reduced separation and improved safety.

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
N/A	Y	N/A	N/A	Y

***Applicability consideration:***

Requires good synchronization of airborne and ground deployment to generate significant benefits, in particular to those equipped. Benefits increase with the proportion of equipped aircraft.

***B0 –TBO: Improved Safety and Efficiency through the initial application of Data Link En-Route***

<b>Elements</b>	<b>Applicability</b>	<b>Performance Indicators/Supporting Metrics</b>	<b>Targets</b>	<b>Action Plan</b>	<b>Remarks</b>
ADS-C and CPDLC		Indicator: % of FIRs having implemented data link en-route  Supporting Metric: Number of FIRs having implemented data link en-route		<ol style="list-style-type: none"> <li>1. Technical and operational support for datalink trials.</li> <li>2. As a priority start with datalink implementation in the Empty Quarter as a pilot project.</li> </ol>	

**B0 – CCO: Improved Flexibility and Efficiency Departure Profiles - Continuous Climb Operations (CCO)**

**Description and purpose**

To implement continuous climb operations in conjunction with performance-based navigation (PBN) to provide opportunities to optimize throughput, improve flexibility, enable fuel-efficient climb profiles and increase capacity at congested terminal areas.

**Main performance impact:**

KPA- 01 – Access and Equity	KPA-02 – Capacity	KPA-04 – Efficiency	KPA-05 – Environment	KPA-10 – Safety
N/A	N/A	Y	Y	Y

**Applicability consideration:**

Regions, States or individual locations most in need of these improvements. For simplicity and implementation success, complexity can be divided into three tiers:

- a) least complex: regional/States/locations with some foundational PBN operational experience that could capitalize on near-term enhancements, which include integrating procedures and optimizing performance;
- b) more complex: regional/States/locations that may or may not possess PBN experience, but would benefit from introducing new or enhanced procedures. However, many of these locations may have environmental and operational challenges that will add to the complexities of procedure development and implementation; and
- c) most complex: regional/States/locations in this tier will be the most challenging and complex to introduce integrated and optimized PBN operations. Traffic volume and airspace constraints are added complexities that must be confronted. Operational changes to these areas can have a profound effect on the entire State, region or location.

<b>B0 – CCO: Improved Flexibility and Efficiency Departure Profiles - Continuous Climb Operations (CCO)</b>					
<i>Elements</i>	<i>Applicability</i>	<i>Performance Indicators/Supporting Metrics</i>	<i>Targets</i>	<i>Action Plan</i>	<i>Remarks</i>
PBN SIDs	TBD	Indicator: % of International Aerodromes/TMA with PBN SID implemented  Supporting Metric: Number of International Aerodromes/ TMAs with PBN SID implemented			
International aerodromes/TMAs with CCO	TBD	Indicator: % of International Aerodromes/TMA with CCO implemented  Supporting Metric: Number of International Aerodromes/TMAs with CCO implemented		1) Pilot projects for CCOs 2) PBN Workshops	