NACC/WG/8 — WP/20 24/08/23

Eighth North American, Central American and Caribbean Working Group Meeting (NACC/WG/8) Mexico City, 29 August - 1 September 2023

Agenda Item 3: Follow-up of NACC/WG 2022-2023 Action Plan

3.6 NACC/WG progress in operations: AO, Air Traffic Management (ATM), Search and Rescue (SAR), ATFM and Aerodromes and Ground Aids (AGA)

AIRSPACE OPTIMIZATION TASK FORCE REPORT TO NACC WG MEETING

(Presented by AO/TF Rapporteur)


EXECUTIVE SUMMARY					
	This working paper presents an update of the work and activities conducted by the Airspace Optimization Task Force (AOTF).				
Action:	Suggested actions are presented in Section 4				
Strategic Objectives:	 Safety Air Navigation Capacity and Efficiency Economic Development of Air Transport Environmental Protection 				
References:	 Seventh North American, Central American and Caribbean Working Group Meeting (NACC/WG/7) 29 August- 1 September 2022 Second Meeting of the North American, Central American and Caribbean Working Group (NACC/WG) Airspace Optimization Task Force (AO/TF/2), 13 to 17 February 2023 				

1. Introduction

- 1.1 Following the analysis of the current airspace structure of the CAR Region; and taking into consideration the development of a roadmap to achieve the ASBU thread Improved Operations through enhanced en-route trajectories (FRTO); the ICAO NACC Airspace Optimization Taskforce (AOTF) has amended its work programme to consider the necessary tasks to transition to Free Route Airspace (FRA).
- 1.2 The AO/TF amended work programme is presented as **Appendix A** to this WP.

2. Discussion

As mentioned at previous WG meetings, the work of the AOTF is based on a two-tiered system that first reaches out for the "low hanging fruit"; i.e. city pair routes that can be optimized at no additional cost or investment; and the long-term goal of FRA. The AO/TF comprises of a Core Team of Air Traffic Management (ATM) Subject Matter Experts (SMEs) and the CANSO, IATA, ICAO Free Route Airspace (CIIFRA) Team. The CIIFRA team coordinates trials, conducts analysis and engages in collaboration and coordination activities with stakeholders to achieve operational advantages (UPRs, SDRs, trials etc.) based on current systems and procedures. The Core Team focusses on the ASBU initiatives that support FRTO by researching/analysing/developing the required ATM processes. The Core Team also coordinates with States/Territories/Organizations to ensure the information published in the Air Navigation Plan (ANP) CAR/SAM Vol III is valid. Both teams collaborate on the development of the roadmap to transition the region to FRA.

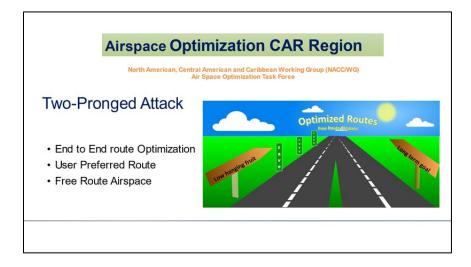

- 2.2 Following the Second Meeting of the North American, Central American and Caribbean Working Group (NACC/WG) Airspace Optimization Task Force (AO/TF/2 (13 to 17 February, 2023), it was recognized that greater collaboration was required between the various taskforces of the NACC WG to effect Regional Airspace Optimization. There are CNS, AIM, ATFM AGA and MET related ASBU initiatives that support the implementation of FRTO. During the Second Meeting of Rapporteurs of the North American, Central American and Caribbean Working Group (NACC/WG/RAP/2) (28 to 31 March 2023), these items were discussed and it was agreed that there will be a joint effort amongst all taskforces to support the regional implementation of FRA. **Appendix B** to this working paper provides a list of subject areas that requires the attention of the relevant SMEs within each taskforce.
- 2.3 During the sixth North American, Central American and Caribbean Working Group (NACC/WG) Aeronautical Information Management Implementation Task Force Meeting (AIM/TF/6) (21 to 24 August 2023), the AO/TF presented a working paper (WP/10) which highlighted the need for harmonization in airspace/airways section of the Aeronautical Information Publications (AIPs) in the region. Both taskforces will work on the process to achieve this.

3. Progress and Results

- 3.1 The AO Taskforce has completed the Optimized Airspace Concept for the CAR Region which includes a plan to transition to FRA. It is noted that PBN Implementation is incorporated as part of the transition to FRA and therefore the PBN objectives outlined in the previous work programme have been incorporated into the new work programme. The draft document is included as **Appendix C** to this working paper.
- 3.2 Since the last NACC/WG meeting, a new concept has been introduced into airspace optimization, Strategic Direct Routing (SDR). The following is a definition of SDR:

"Strategic Direct Routing (SDR) – SDR allows users to plan a route using any named waypoints within a specified volume of airspace as long as the route complies with parameters set by the State. The parameters may include restrictions such as hours in which SDR rules apply, at or above altitude requirements and maximum distance between waypoints. Users must file flights via authorized (i.e., published) routes to the entry and exit point at the boundaries of the SDR airspace volume; that is, the SDR system only applies inside the defined volume of airspace. SDR is considered to be a transition to the implementation of the Free Route Airspace (FRA) concept".

- 3.3 SDR's began in late 2022 with Mexico approving a trial of limited airlines to file any route at or above FL290 between the hours of 0000 and 0600. This trial was closely managed, and based on positive safety and efficiency results, the trial parameters were expanded over time. The Dominican Republic has published an AIC, which allows unrestricted SDRs in their FIR, and COCESNA is following soon with plans of their own. This is an exciting time as the move towards FRA has been pushed forward by leaps and bounds. The taskforce meeting at the end of September will highlight these moves and work with all the states and ANSP's to develop their own plans for SDR trials/implementation.
- 3.4 The AOTF encountered some difficulty in the execution of some elements of its work programme. Regarding Decision NACC/WG/07/06 Ad Hoc group to Categorize Terminal Airspace Procedures, the ad hoc group was formed and there were several meetings. The project is approximately 90% complete and it is expected that the Resource Guide will be available for promulgation at the end of October. Additionally, there is a delay to the task to verify the FIR boundaries and waypoints (update/correction of ICARD database) to be included in the CARSAM ANP update. It is expected that this exercise will be conducted by December 31, 2024.
- 3.5 Metrics updated. These metrics represent information the CIIFRA team has received and is minimum yearly savings from the most recent data.

	ete	fuel	CO2	cost
	min	kg	kg	\$
UPR	26,199	2,604,033	8,228,744	4,514,401
SDR	8,380	506,500	1,592,429	1,222,724
SKBO-KJFK	1,071	106,469	336,442	193,949
FDX SDR	3,136	323,796	1,023,194	579,142
KIAH-MM\$D	10,038	439,326	1,388,272	833,113
Total	48,823	3,980,124	12,569,080	7,343,329

4. Suggested actions

- 4.1 The Meeting is invited to:
 - a) evaluate the progress of the AO/TF;
 - b) review and approve the AO/TF work programme presented in Appendix A;
 - c) consider the areas for taskforce collaboration presented in Appendix B;
 - d) review and approve the CAR Optimized Airspace Concept document presented in Appendix C; and
 - e) propose any other actions as deemed necessary.

APPENDIX A AOTF proposed Work Programme 2023-2025

Task Name/ Tarea	Start/ Inicio	Finish / Final	Deliverables/ Resultados	Follow-up/ Seguimiento	Responsible/ Responsables	Observations/ Comments- Observaciones/ Comentarios
a) Assist States/Territories with the Implementation of Airspace Optimisation concept for oceanic, continental and terminal areas in of NAM/CAR Regions in accordance with the ICAO PBN Manual Doc 9613 and Doc 9992		DEC 2025	i) 100% removal of redundant conventional ATS routes by December 2025 ii) 75% replacement of conventional routes by RNAV 5 routes by December 2025		AO Taskforce, ICAO, States, Territories, International Organizations	Status: Valid - Ongoing KPA: Capacity KPI06: En-route airspace Capacity Reference Sub-Project to Develop and Implement a Performance-Based Navigation (PBN) Airspace Concept Document for the CAR Region. Requirements: Commitment from executive decision makers, Funding for the project, Human Resources (Airspace Designers, ATCOs, Airline Operators, ANSP Decision makers).
	SEP 2022	June 2023	iii) Develop the CAR Airspace Optimization Concept which includes a roadmap for transition to FRA by June 2023	ICAO Regional Office and NACC WG AO Task Force	AO Taskforce, ICAO, States, Territories, International Organizations	Status: Draft Vol.1 COMPLETED in August 2023. Approval required by NACC WG. FRTO B0/1 and B1/1, Direct Routing and Free Route Airspace, respectively. KPA: Efficiency

Task Name/ Tarea	Start/ Inicio	Finish / Final	Deliverables/ Resultados	Follow-up/ Seguimiento	Responsible/ Responsables	Observations/ Comments- Observaciones/ Comentarios
						KPI04: Filed flight plan en-route extension
b) Assist States/Territories and International Organizations with PBN training	APR 2019	DEC 2024	Coordinate the development of an online PBN Training program to be delivered by two Regional CATCs (English/Spanish) by December 2024	ICAO Regional Office and NACC WG AO Task Force	States, Territories, Int. orgs, ANSPs and NAM/CAR Civil Aviation Training Centres Group (CATCG)	Status: Valid - Ongoing AO TF to engage with Civil Aviation Training Centers Group to promote the development of an online PBN training program for pilots and controllers. AO TF look into the possibility of supplementing PBN training for those states that require it.
c) Assist States/Territories and Int. Org. with the Implementation of CDOs based on RNAV 1 and RNP1 navigation specification	APR 2019	DEC 2025	Increase the amount of CDOs within the CAR region by 20% by December 2025	ICAO Regional Office and NACC WG AO Task Force	States, Territories, Int. Org. and ANSPs in conjunction with the NACC WG AO Task Force	Status – Valid – Ongoing APTA-B0/4 CDO (Basic) Operational KPA – Efficiency NACC WG AO Task Force will coordinate with states and airspace users to determine which aerodromes require CDOs

d) Assist States/Territories and Int. Org. with the Implementation of CCOs based on RNAV 1 and RNP1 navigation specification and RNP-AR departures/arrivals in terminal areas, as required	APR 2019	DEC 2025	Increase the amount of CCOs within the CAR region by 20% by December 2025	ICAO Regional Office and NACC WG AO Task Force	States, Territories, Int. Org. and ANSPs in conjunction with the NACC WG AO Task Force	Status – Valid – Ongoing APTA-B0/5 CCO (Basic) Operational KPA – Efficiency NACC WG AO Task Force will coordinate with states and airspace users to determine which aerodromes require CDOs/CCOs and RNP-AR departures/arrivals.
e) Identify the discrepancies between the ATS routes structure implemented in the CAR region and the CARSAM eANP VOLUME II (Table ATM II - ATS Routes) propose actions to attend the differences found	APR 2019	DEC 2024	Identify and correct 100% deficiencies by December 31, 2024	ICAO Regional Office and NACC WG AO Task Force	NACC WG AO Task Force, ICAO	Status – Valid – Delayed Target date extended NACC WG AO Task Force secretariat and rapporteur will coordinate with counterparts from SAM to resolve discrepancies.
f) Confirm the lateral limits of the FIRs within the CAR Region and update the CARSAM eANP VOLUME I)	JUN 2023	DEC 2024	Ensure 100% completion of updates by DEC 31, 2024	ICAO Regional Office and NACC WG AO Task Force	NACC WG AO Task Force, ICAO	Status – Valid – Delayed Target date extended NACC WG AO Task Force secretariat and rapporteur will coordinate with counterparts from SAM to resolve discrepancies.

g) Develop and implement a regional process to approve and implement routes optimization initiatives for the region	AUG 2023	JUN 2025	A clear process for regional approval and implementation of routes optimization initiatives for the region to be fully functional by JUN 2025	ICAO Regional Office and NACC WG AO Task Force	States, Territories, Int. Org and ANSPs in conjunction with the NACC WG AO Task Force	Status – Valid – Delayed Target date extended Part of the CIIFRA process. Develop ICAO NACC Web site to support the process. Coordinate with the SAM Region Route Optimization Process.
i) Update ICARD to reflect current and accurate 5LNC	AUG 2022	DEC 2023	Ensure ICARD reflects current and accurate 5LNC of the States AIPs. 75% completion by DEC 2023	ICAO Regional Office and NACC WG AO Task Force	ICAO, States, Territories, Int. Org.	Status – Valid – Ongoing NACC WG AO TF to support ANSPs to update ICARD to reflect current and accurate 5LNC

APPENDIX B
Subject areas requiring collaboration with all NACC WG Tfs

ANS COMPONENT – TASK FORCE	GOAL	REMARKS	INITIATIVES
CNS – SURV, COMM, AIDC	Synchronize and Harmonize Communication, Navigation & Surveillance systems across the NAM/CAR/SAM to support the transition to FRA	The CNS System is the backbone of the ANS system. It is a critical enabler to Airspace Optimization. A gap analysis of the CNS across the regions should be conducted. Use the analysis to determine the expected baseline for the achievement of regional objectives. Some ANSPs may have more advanced CNS systems, but the region should agree upon the minimum equipment that all ANSPs need to have. A plan can then be developed to help those ANSPs that are currently below the minimum.	 Surveillance data sharing/redundancy for surveillance Air/ground and ground/ground Communication back-up/redundancy (e.g. agreement with adjacent States to house transceivers etc.) Exploration of alternative technologies i.e., Space-based VHF Harmonized ATM systems MTCD capability AIDC CPDLC Digital ATIS
AIM	Harmonize the methodology for electronic information sharing across the region to support the transition to FRA. Improvements to availability, reliability and integrity.	Information is the blood that flows through the veins of the ANS system. FRA relies on realtime, high integrity data for quick decision making. AIM is very important for predictability. Real time information allows for more efficient decisions. Accuracy affects safety. Availability ensures that the information reaches all the stakeholders that affect the ANS system.	 Harmonization of AIP across the Region Standardizing or eliminating the cost of access to AIP Reduction of duplicate FPLs Reduction in FPL errors More digital information Ensuring quality management of data Sharing of digital data

ANS COMPONENT – TASK FORCE	GOAL	REMARKS	INITIATIVES
AGA	Guidelines for improved Airport infrastructure and design which facilitate en-route/terminal airspace optimization efforts	Airport operations sometimes negate the efficiency gains provided by improved en-route/ terminal airspace designs. Conduct an analysis of busy aerodromes in the region to determine choke spots and provide solutions aimed at improving efficiency.	 Greater collaboration between ANSP/Airlines and Airport operators re airport design, lighting, ground aids (approach) Increased ACDM Up to date Obstacle analysis
MET	Improved harmonization and availability of all MET related data to support the transition to FRA. MET data available in a digital form.	Accurate/real-time MET information is important for both strategic and tactical flight planning. An analysis should be conducted across the region to determine where improvements can be made. Research other regions to determine if there are things that this region can follow.	 Standardization of weather reports Volcanic ash representations must be the same globally Weather forecast and updates need to be given from an aviation perspective Airline collaboration with ANSP on the acquisition of weather products Special weather reports (SPECI) requirements. Should temperature change be included as a reason for SPECI issuance?

APPENDIX C



INTERNATIONAL CIVIL AVIATION ORGANIZATION

SUB-PROJECT TO DEVELOP AND IMPLEMENT AN OPTIMIZED AIRSPACE CONCEPT DOCUMENT FOR THE CAR REGION

ICAO REGIONAL TECHNICAL COOPERATION PROJECT — "MULTI-REGIONAL CIVIL AVIATION ASSISTANCE PROGRAMME (MCAAP)" (RLA/09/801)
11 August 2023

Vol 1 11-8-2023

by

Ernest Snyder Riaaz Mohammed Luis Rosales William Alsina

ICAO Representative:	Ernest Snyder ATM/SAR NACC Regional officer			
Place of Mission:	ICAO NACC Regional Office Mexico City, Mexico			
Dates of Mission:	26-29 July 2022			
Objectives of the Mission:	 Develop an Optimized Airspace concept for the CAR region, which includes harmonized separation standards, airspace restructuring, Performance Based Navigation and Free Route Airspace. Goals where established for the optimization of airspace to allow continuous flow in the upper and lower airspace of contiguous Flight Information Regions (FIRs) and TMAs. 			
Summary of Activities:	 Concept began as project under PBN Taskforce in 2018 Concept was continued under the Airspace Optimization Taskforce in July 2022 Initial meeting with the SMEs to discuss the sub-project mission objectives. Identify requirements for the development of an optimized airspace concept for the CAR region. Consider a methodology to assess the readiness of each State to transition to FRA. Draft a report summarizing the sub-project mission outcomes. 			

CC	NTEN	Т	
1.	Introd	luction	4
2.	Objec	tives	4
3.	Scope		5
4.	Airsp	ace Optimization Concept	6
4.1	Genera	1	6
4.2	. Goals	for the Airspace Optimization	6
4.3	Harmo	nized Separation Standards	7
		r continental airspace, implementation of 20NM longitudinal separation at FIR Boundaries E APPLICABLE).	7
2	1.3.1.3	For oceanic airspace, use of 50 NM lateral separation.	7
4	1.3.1.5	For oceanic airspace, use of 30 NM longitudinal and lateral separation.	8
4.4	Airspa	ce Structure	8
4.5	PBN A	irspace Standards	8
4	4.5.1 Im	plementation of RNAV 5 routes as agreed to in the Regional ANP.	8
۷	1.5.2 Re	moval of conventional routes made redundant by PBN route implementation.	8
4	4.5.3 Im	plementation of RNAV/RNP 1 STAR/SIDs (CCOs and CDOs) to TMAs within the FIRs.	9
۷	1.5.4	Implementation of LNAV approaches for those International Airports so determined.	9
4	1.5.5	LNAV/VNAV (BARO VNAV) Approaches if analysis determines a benefit	10
4	4.5.6 Im	plementation of RNP AR Approaches/Departures if analysis determines a benefit.	10
4	1.5.7 Im	plementation of APV (GLS/LPV) Approaches if analysis determines a benefit	11
4.6	Move t	oward FRA	11
5.	Γimelin		13
6. I	Referen	ce Documents	16

1. Introduction

1.1

Background- This document was started under the PBN Taskforce in 2018 and continued as the taskforce evolved into the Airspace Optimization Taskforce in 2022. This document aligns with and has been/will be coordinated with other regions.

- 1.1 The Sub-Project to develop and implement an optimized airspace concept document for the CAR Region involved Subject Matter Experts (SMEs) selected among Project Member States and led by the ICAO NACC Regional Office. This document includes recommendations for harmonized separation standards, airspace restructuring, continued implementation of Performance Based Navigation (PBN) and establishes a goal to transition to Free Route Airspace (FRA).
- 1.2 The GANP will be used as guidance to determine the generic requirements to optimize the airspace of the CAR Region including the transition to Free Route Airspace (FRA).
- 1.3 The Airspace Optimization (ASO) Taskforce will develop a methodology for future assessment of the readiness of each State to transition to FRA.
- 1.4 The SMEs collaborated with the CIIFRA team on the development of the optimized airspace concept and the transition roadmap for the CAR Region.

2. OBJECTIVES

2.1 The main objective of this document is to serve as a regional document on the process to move towards FRA as well as follow up with the ICAO program No Country Left Behind (NCLB). The Airspace Optimization (ASO) Taskforce will collaborate with the States to assist them with the individual airspace optimization plans.

2.2 Specific objectives:

The CAR Region Airspace Optimization has the next specific objectives aligning with the upcoming Air Navigation Plan (ANP) CAR/SAM Vol III

Safety: Reduce ATS incidents, Controlled Flights Into Terrain (CFIT), trough harmonization of airspace and improvement of STARs, SIDs and APPs designs.

Capacity: Allow a more flexible use of airspace to avoid saturation of traffic over determined areas.

Efficiency: Reduce work overload for crewmembers and Air Traffic Controllers.

Environment: Reduce CO2 emissions and noise over sensitive areas serving the states and linking to Vol III.

2.3 Benefits

Help States to comply with Aviation System Block Upgrade (ASBU) airspace optimization requirements. Increase harmonization between adjacent States.

Reduce aircraft navigational equipment requirements.

Reduce distance travelled from point to point for each aircraft operation.

Improve aircrafts Fuel savings and reduction of CO2 emissions.

Increase continuous climb and descend operations for aircraft.

Reduce the use of holding patterns.

Provide greater access through mountainous areas.

Reduce noise in the vicinity of airports.

Reduce pilot and Air Traffic Control (ATC) workload.

Reduce radio congestion.

Reduce ANSP operational cost through the reduction of the requirement for ground navaids. Reduce GPWS.

Increase flexible use of airspace.

3. Scope

3.1 This optimized airspace concept is intended for the following States/Organizations of the Caribbean (CAR) Region:

UPPER AIRSPACE	LOWER AIRSPACE
	BELIZE (BELIZE TMA)
	GUATEMALA (LA AURORA TMA)
COCESNA (CENTRAL	HONDURAS (LA MESA TMA; TONCONTIN TMA;ROATAN ATZ; LA CEIBA CTR; PALMEROLA)
AMERICA)	EL SALVADOR (EL SALVADOR TMA)
	NICARAGUA (MANAGUA TMA)
	COSTA RICA (EL COCO TMA; LIBERIA TMA)
MEXICO (MEXICO, MAZATLAN OCEANIC, MERIDA)	ACAPULCO; CANCÚN-COZUMEL; CIUDAD DEL CARMEN; CIUDAD JUAREZ; CIUDAD OBREGON; CIUDAD VICTORIA; CULIACÁN; CHIHUAHUA; DURANGO; GUADALAJARA; HERMOSILLO; IXTAPA-ZIHUATANEJO; LA PAZ; LOS MOCHIS; LEÓN - AGUASCALIENTES; MANZANILLO; MATAMOROS; MAZATLAN; MERIDA; MEXICO CITY; MONTERREY; MORELIA; NUEVO LAREDO; OAXACA; PUEBLA; PUERTO VALLARTA; QUERÉTARO; REYNOSA; SALTILLO; SAN JOSE DEL CABO; SAN LUIS POTOSÍ; TAMPICO; TIJUANA; TORREÓN; TUXTLA GUTIÉRREZ; VERACRUZ; VILLAHERMOSA;
JAMAICA (KINGSTON)	JAMAICA TMA;
HAITI (PORT AU PRINCE)	PORT AU PRINCE TMA
CUBA (HAVANA)	HAVANA TMA; SANTA CLARA TMA; SANTIAGO TMA
CURACAO (CURACAO)	CURACAO TMA; JULIANA TMA; BEATRIX CTR; FLAMENGO CTR;
DOMINICAN REPUBLIC	
(SANTO DOMINGO)	PUNTA CANA TMA; LAS AMERICAS TMA; CIBAO TMA
UNITED STATES (SAN JUAN)	SAN JUAN
	TRINIDAD AND TOBAGO (PIARCO CTR)
	ANTIGUA AND BARBUDA (VC BIRD TMA)
TRINIDAD AND TOBAGO (PIARCO)	BARBADOS (ADAMS TMA)
	MARTINIQUE (MARTINIQUE TMA)
	ST LUCIA (ST LUCIA CTR)

ST VINCENT AND THE GRENADINES (ARGYLE TMA)
GRENADA (MAURICE BISHOP TMA)
GUADELOUPE (POINTE-A-PITRE-TMA)

Note: Due to the high flow of traffic and airspace complexity that exists between the CAR Region and the Miami Oceanic, Houston Oceanic and New York Oceanic FIRs, it is recommended that a point of contact from these FIRs be established to coordinate with the rest of the Region.

4. AIRSPACE OPTIMIZATION CONCEPT

4.1 GENERAL

4.1.1 The Airspace Optimization Concept is a plan to benefit all current and envisioned users of the airspace by improving safety, capacity and efficiency of operations in the CAR Region.

4.1.2 Airspace Optimization utilizes all available technologies, procedures and concepts, including harmonized separation standards, airspace restructuring, PBN and FRA.

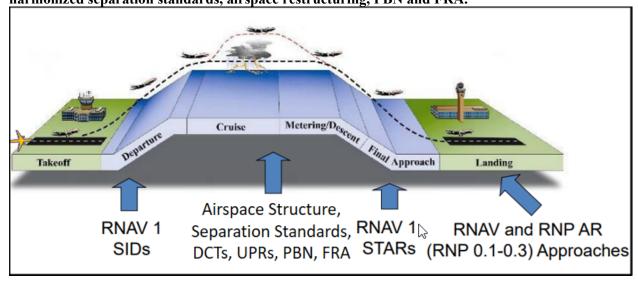


Image 1. Airspace Optimization throughout all phases of flight.

4.2. GOALS FOR THE AIRSPACE OPTIMIZATION

4.2.1 The following table reflects the goals established by the taskforce to meet the Specific Objectives of Airspace Optimization in the Region:

	Specific Objective				Goals
	Saf.	Cap.	Eff.	Env.	Goals
Airspace Optimization		X	X	X	Implementation of RNAV 5 routes as agreed to in the
					Regional ANP.
		X	X	X	Continue the airspace optimization already begun in point
					to point trajectories, UPR trials and eventual transition to
					FRA.

			_	·
	X	X	X	Conduct an analysis for the implementation of RNP 2 for continental airspace routes.
	X	X	X	Decide upon a date for the regional implementation of RNP 4 for oceanic airspace routes.
	х	X	X	For Oceanic airspace, use of 30 NM longitudinal and lateral separation (WHERE APPLICABLE) and 50 NM separation for all other oceanic areas.
Х				Removal of conventional routes made redundant by PBN route implementation.
Х	X	X	X	Harmonization of upper airspace routes with RNAV/RNP 1 STAR/SIDs (CCOs and CDOs) of TMAs within the FIR.
	X	X	X	For continental airspace, implementation of 20 NM longitudinal separation at FIR Boundaries (WHERE APPLICABLE).
X	X	X	X	Implementation of RNAV/RNP 1 STAR/SIDs (CCOs and CDOs) to TMAs within the FIRs.
Х				Implementation of LNAV approaches for those International Airports so determined.
Х				Implementation of LNAV/VNAV (BARO VNAV) Approaches if analysis determines a benefit.
Х		X	X	Implementation of RNP AR Approaches/Departures if analysis determines a benefit.
х		X	X	Implementation of APV (GLS/LPV) Approaches if analysis determines a benefit.

4.3 HARMONIZED SEPARATION STANDARDS

4.3.1 For continental airspace, implementation of 20NM longitudinal separation at FIR Boundaries (WHERE APPLICABLE).

- 4.3.1.1 This requirement is based on the Longitudinal Separation Minima based on distance using Distance Measuring Equipment (DME) and/or GNSS.
- 4.3.1.2 Separation shall be established by maintaining not less than specified distance(s) between aircraft positions as reported by reference to DME in conjunction with other appropriate navigation aids and/or GNSS. This type of separation shall be applied between two aircraft using DME, or two aircraft using GNSS, or one aircraft using DME and one aircraft using GNSS. Direct controller-pilot VHF voice communication shall be maintained while such separation is used.

4.3.1.3For oceanic airspace, use of 50 NM lateral separation.

4.3.1.4 RNAV 10 (designated and authorized as RNP 10) supports 50 NM lateral and 50 NM longitudinal distance based separation minima in oceanic or remote area airspace.

4.3.1.5For oceanic airspace, use of 30 NM longitudinal and lateral separation.

- 4.3.1.6 RNP 4 supports 30 NM lateral and the 30 NM longitudinal distance based separation minima in oceanic or remote area airspace.
- 4.3.1.7 The taskforce acknowledges there are varying separation standards utilized by ANSPs across the Region and this leads to inefficient operations. The taskforce will continue the work that has already begun to harmonize the separation standards across FIRs boundaries.
- 4.3.1.8 An analysis will be conducted to determine the timeline for the implementation of RNP 4 for oceanic airspace. This will required collaboration between the Taskforce, ANSPs and Airline Operators.

4.4 AIRSPACE STRUCTURE

- 4.4.1 The taskforce acknowledges that the current structure of regional airspace may be improved in order to achieve greater efficiencies.
- 4.4.2 The taskforce will analyze the regional airspace and seek to identify those portions of airspace that may be improved through redesign or gain benefit through functional use of airspace.

4.5 PBN AIRSPACE STANDARDS

4.5.1 Implementation of RNAV 5 routes as agreed to in the Regional ANP.

- 4.5.1.1 RNAV 5 operations are based on the use of RNAV equipment which automatically determines the aircraft position in the horizontal plane using input from one or a combination of the following types of position sensors, together with the means to establish and follow a desired path: a) VOR/DME; b) DME/DME; c) INS or IRS; and d) GNSS.
- 4.5.1.2 The ANSP must assess the navaid infrastructure in order to ensure that it is sufficient for the proposed operations, including reversionary modes. It is acceptable for gaps in navaid coverage to be present; when this occurs, route spacing and obstacle clearance surfaces need to take account of the expected increase in lateral track-keeping errors during the "dead reckoning" phase of flight.
- 4.5.1.3 Regarding separation, in an ATC surveillance environment, the route spacing will depend on acceptable ATC workload and availability of controller tools, separation is consider as follows:
 - 18 NM for opposite direction routes,
 - 16.5 NM for same direction routes, and
 - As low as 10 NM where ATC intervention capability permits.

4.5.2 Removal of conventional routes made redundant by PBN route implementation.

4.5.2.1 RNAV/RNP routes are more efficient than conventional routes providing "gate to gate" operations and also don't rely on radioaids installed on ground, improving safety and accuracy. Those are the main

reason why it is consider important to replace conventional routes to RNAV/RNP routes, mainly where they are superposed.

4.5.3 Implementation of RNAV/RNP 1 STAR/SIDs (CCOs and CDOs) to TMAs within the FIRs.

- 4.5.3.1 The main objective is to improve safety, predictability of flights and airspace capacity while reducing noise, fuel consumption, emissions and pilot-controller communications at the same time.
- 4.5.3.2 CDO is an aircraft operating technique aided by appropriate airspace and procedure design and appropriate ATC clearances enabling the execution of a flight profile optimized to the operating capability of the aircraft, with low engine thrust settings and, where possible, a low drag configuration, thereby reducing fuel burn and emissions during descent. The optimum vertical profile takes the form of a continuously descending path, with a minimum of level flight segments only as needed to decelerate and configure the aircraft or to establish on a landing guidance system (e.g. ILS).
- 4.5.3.3 Continuous climb operations (CCO) is an aircraft operating technique enabled by airspace design, instrument procedure design and facilitation by ATC, allowing for the execution of a flight profile optimized to the performance of the aircraft. CCO enables the aircraft to attain initial cruise flight level at optimum airspeed and engine thrust settings set throughout the climb, thereby reducing total fuel burn and emissions. Ideally, the departure design is such that arriving traffic is also able to descend based on an optimum descent profile. Where the departure and arrival flows cannot be designed independently, there will need to be a compromise between the needs of the departure and arrival flow optimization; this compromise should be reached collaboratively.
- 4.5.3.4 An aircraft's fuel efficiency in terms of fuel burned per kilometre flown in level flight increases with height. However, the fuel used in climbing to that altitude can be a significant part of the overall fuel used for the flight. Therefore, for any given route length, there is an optimum initial cruise flight level which will be dependent upon the aircraft type and mass, as well as on the meteorological conditions of the day. CCO is only one of the tools involved in a complete airspace design. Throughout the design process, CDO, CCO and other route modifications should all be considered.

4.5.4 Implementation of LNAV approaches for those International Airports so determined.

4.5.4.1 RNP APCH LNAV procedures provides lateral guidance and can be defined with fly-by and fly-over waypoints as "T" or "Y" type approach.

- 4.5.4.2 RNP APCH is defined as an RNP approach procedure that requires a lateral TSE of \pm 1.1 NM in the initial, intermediate and missed approach segments (MAS) and a lateral TSE of \pm 0.3 NM in the Final Approach Segment (FAS).
- 4.5.4.3 RNP APCH LNAV procedure do not rely on ground radioaids and are more accuracy than conventional VOR/DME procedures. Also improve access being aligned in most cases with the runway centre line.

4.5.5 LNAV/VNAV (BARO VNAV) Approaches if analysis determines a benefit

- 4.5.5.1 Baro-VNAV approach procedures are classified as APV procedures in support of Type A 3D approach operations. They utilize a DA/H and not an MDA/H, and neither a FAF nor a missed approach point (MAPt) is identified. They use obstacle assessment surfaces similar to those for ILS, but based on the specific lateral guidance system.
- 4.5.5.2 Baro-VNAV procedures are used in association with LNAV-only procedures. The LNAV-only FAF and MAPt are needed to define the lateral areas and to support the lateral guidance but they are not used for the vertical navigation function.
- 4.5.5.3 Baro-VNAV procedures shall not be authorized with a remote altimeter setting.
- 4.5.5.4 Providing lateral and vertical guidance, BARO-VNAV approaches increase safety, access and accuracy compare with an RNP APCH LNAV procedure.

4.5.6 Implementation of RNP AR Approaches/Departures if analysis determines a benefit.

- 4.5.6.1 Implementation of RNP AR procedures extends beyond procedure design in that an authorization process for aircraft operators is necessary to ensure that other critical dependencies and associated airworthiness and operational procedure approvals are complete prior to implementation. Guidance on implementation and operational approval is provided in the PBN Manual.
- 4.5.6.2 RNP AR APCH is defined as an RNP approach procedure that requires a lateral TSE as low as ± 0.1 NM on any segment of the approach procedure. RNP AR APCH procedures are only published where significant operational advantages can be achieved while preserving or improving safety of operation.
- 4.5.6.3 RNP AR APCH are very useful in mountainous and noise sensitive areas to improve access to the airport through radius to fix RF turns.

4.5.7 Implementation of APV (GLS/LPV) Approaches if analysis determines a benefit

- 4.5.7.1 GBAS is also refer as LAAS (local area augmentation system), It can be used to achieve accuracy required to CAT I-III and is done by locating 4 receivers on the ground at a precisely -surveyed (centimetre accuracy) positions.
- 4.5.7.2 The cost of one GBAS ground station is less that the cost of multiple ILSs for an airport. Another advantage of GBAS is that the accuracy enhancement is provided for the whole airport.
- 4.5.7.3 PBN is one of the tools that supports the airspace optimization concept and should continue to be implemented according to the timelines agreed to for the Region, in conjunction with other concepts in the transition to FRA.
- 4.5.7.4 PBN concept provide a safe and efficient airspace design for terminal areas. SIDs/STARs are the link to the upper airspace and utilizing CCOs/CDOs provide optimal efficiency.

4.6 MOVE TOWARD FRA

- 4.6.1 Given the diversity of the CAR Region airspace, the taskforce will develop a methodology to analyze the level of readiness of each FIR within the region and determine the steps required for Airspace Optimization, including the transition to Free Route Airspace, based on the following concepts:
 - Tactical Direct (TDR): Tactical Directs (TDRs) are established at a national level and based upon a requested by the pilot and is operational advantageous. TDRs should be considered as an early iteration of the FRA concept.
 - User Preferred Routings (UPRs): User Preferred Routings (UPRs) may allow users to make a request and gain approval by ANSPs to deviate from the basic requirements of published ATS route network in order to tailor individual flight's routes to achieve more favorable wind conditions and to meet other company objectives.
 - Strategic Direct Routing (SDR): SDR allows users to plan a route using any named waypoints within a specified volume of airspace as long as the route complies with parameters set by the State. The parameters may include restrictions such as hours in which SDR rules apply, at or above altitude requirements and maximum distance between waypoints. Users must file flights via authorized (i.e., published) routes to the entry and exit point at the boundaries of the SDR airspace volume; that is, the SDR system only applies inside the defined volume of airspace. SDR is considered to be a transition to the implementation of the Free Route Airspace (FRA) concept.
 - Free Route Airspace (FRA): Free Route Airspace is a specified volume of airspace within which users may freely plan a route between defined entry and exit points, with the possibility to route via intermediate waypoints, without reference to the ATS route network, subject to airspace availability.

FRA enables airspace users to fly as close as possible to what they consider the optimal trajectory without the constraints of a fixed route network structure.

Note: These definitions are strictly for the purpose of this document.

4.6.2 In order to classify the capability of a particular portion of airspace to move forward with the Airspace Optimization process and the transition to FRA, the following levels will be utilized:

Level	Description
Level A	A portion of airspace which allows TDRs.
Level B	A portion of airspace which allows UPRs.
Level C	A portion of airspace which allows SDRs.
Level D	A portion of airspace which allows FRA.

Level	Requirements
	Requirements are a combination of Basic Building Blocks (BBBs) and ASBU Elements
	ASBU Elements - ICAO GANP Portal
Level A	Direct Controller-Pilot Communications (DCPC)
	Currently available throughout CAR Region (Continental airspace)
Level B	Level A requirements.
	ATS Surveillance.
	Collaborative Decision Making (CDM) process (such as CADENA) between airline
	operators and the ANSP.
	Currently available throughout most of the CAR Region (Continental airspace)
Level C	Level B requirements.
	ATM Automation System.
	FRTO-B0/4 -Basic conflict detection and performance monitoring.
	FRTO-B0/2- (Harmonized) Airspace Planning and Flexible Use of Airspace.
	Currently available throughout some of the CAR Region (Continental airspace)
Level D	Level C requirements.
	NOPS-B1/5 - Full integration of airspace management with air traffic flow management.
	FRTO-B1/4 - Dynamic sectorization.
	FRTO-B1/3 - Advanced Flexible Use of Airspace (FUA) and management of real time
	airspace data.
	FICE-B0/1 - Automated basic inter facility data exchange (AIDC).
	FRTO-B1/5 - Enhanced Conflict Detection Tools and Conformance Monitoring.
	DAIM-B2/2 - Daily Airspace Management information to support flight and flow
	Evolution.
	In development, expected to be available 2028

5. TIMELINE

Establish an Ad Hoc Team to collaborate, prepare and implement the first User Preferred Route (optimized wind route) trial CIIFRA Team Delta Airlines ECNA, JCAA, CAA-PANAMA, DGAC-ECUADOR, CORPAC Conduct the first User Preferred Route (optimized wind route) trial: + City pair: KATLSPJCKATL + Airline volunteer: DAL • February 24 [DAL151] • February 25 [DAL150] + Aircraft capabilities (minimum) • RNAV 5 and VHF + ANSPs involved: ECNA, JCAA, AAC-P, UAEAC, DGAC-E, CORPAC Next Steps: Based on the results of the Feb 24 and 25 trial, coordinate and conduct longer timeframe (up to one-year) User Preferred Route CIIFRA Team Ad Hoc Team Completed 02/25/	
Route (optimized wind route) trial: + City pair: KATLSPJCKATL + Airline volunteer: DAL • February 24 [DAL151] • February 25 [DAL150] + Aircraft capabilities (minimum) • RNAV 5 and VHF + ANSPs involved: ECNA, JCAA, AAC-P, UAEAC, DGAC-E, CORPAC Next Steps: Based on the results of the Feb 24 and 25 trial, coordinate and conduct longer timeframe (up to	2022
the Feb 24 and 25 trial, coordinate and conduct longer timeframe (up to	2022
(optimized wind route) trial: + City pair: KATLSPJCKATL + Airline volunteer: DAL • Date: TBD [DAL151] • Date: TBD [DAL150] + Aircraft capabilities (minimum) • RNAV 5 and VHF + ANSPs involved: ECNA, JCAA, AAC-P, UAEAC, DGAC-E,	2022

Coordinate with the DGs of the various ANSPs to garner their support for FRA operations	Javier Vanegas Ernie Snyder	Completed	12/31/2022
Establish the meeting schedule and Work Plan (initial steps) for the Ad Hoc Team	Ernie Snyder Riaaz Mohammed	Completed	11/09/2022
Support SENEAM in conducting their Strategic Direct Routing (SDR) Trial	CIIFRA Team	In progress	12/31/2023
Work with the Ad Hoc Team to identify the key considerations for FRA flight plans: + Aircraft capabilities (minimum): • RNAV 5 and VHF + ANSP enroute automation: Havana ACC, Kingston ACC, Panama ACC, Bogota ACC, Guayaquil ACC, Lima ACC + SMS: Safety Assessment (in draft) + ANSP C/N/S: Havana ACC, Kingston ACC, Panama ACC, Bogota ACC, Guayaquil ACC, Lima ACC + ATCO training (enroute, TMA): Havana ACC, Kingston ACC, Panama ACC, Bogota ACC, Guayaquil ACC, Lima ACC + Airline training (pilot, dispatch): Delta Airlines	Ernie Snyder Riaaz Mohammed Ad Hoc Team CIIFRA Team	In progress	06/30/2024
Draft an AIP template for use by the impacted ANSPs to publish FRA in their AIP	CIIFRA Team	Completed	07/30/2022
Update the LAC Airspace Capability Table to include all of the FIRs in the SAM Region	CIIFRA Team	Completed	12/31/2022
Steps	Assigned to	Status	Due Date

C. Provide workshop to ANSP's on SDR development	CIIFRA Team	Not B	egun 10/01/2023
B. Provide ANS Taskforces update on AO plan and requirements/Assistance	Secretariat/Rapported	ır In pro	gress 09/01/2023
A. Categorization of ANSP's into status	Secretariat/Rapported Hoc Team	ur/Ad Not be	egun 06/30/2024
Steps	Assigned to	Status	Date
Outline the training that needs to be presented to pilots and dispatchers support the CIIFRA project		In progress	12/31/2023
Develop the procedures that will be included in the CADENA Procedure Manual regarding the application a support of flights that file FRA flight plans	es and	In progress	09/30/2023
Prepare a regional FRA LOA for	CIIFRA Team	In progress	12/31/2023
cross-border flight plan trials + COCESNA and SENEAM are coordinating a date for their flight plan trials + JCAA advised on 6/18/21 that the must complete a software upgrade before they can conduct AIDC testi with COCESNA. The date for the upgrade is still TBD + ECNA has advised that they ar ready to conduct AIDC testing w JCAA when Kingston is ready	ey e ing	In progress	12/31/2023
Support SENEAM in conducting the Strategic Direct Routing (SDR) Trial		In progress	12/31/2023

D. Begin SDR cross border tests	CIIFRA Team	Not Begun	01/31/2024
E. Establish needs from tests for FRA requirements	CIIFRA Team	Not Begun	06/30/2024
F. Begin FRA Tests in selected ANSP's	CIIFRA Team	Not Begun	01/01/2025

6. REFERENCE DOCUMENTS

ICAO Reference Documents

- 1. Performance Based Navigation (PBN) Manual (Doc 9613)
- 2. Continuous Climb Operations (CCO) Manual (Doc 9993)
- 3. Continuous Descent Operations (CDO) Manual (Doc 9931)
- 4. Required navigation Performance Authorization Required (RNP AR) Manual (Doc 9905)
- 5. Aircraft Operations volume 2- Construction of Visual and Instrument Flight Procedure (Doc 8168)
- 6. Procedures for Air Navigation Service-Air Traffic Management (Doc 4444)
- 7. Regional Performance-based Air Navigation Implementation Plan (RPB ANIP) for NAM/CAR Regions.