



ICAO

International Civil Aviation Organization

Thirty-First Meeting of the Regional Airspace Safety  
Monitoring Advisory Group (RASMAG/31)

Bangkok, Thailand, 29 June – 03 July 2026

### Agenda Item 3: Reports from Asia/Pacific RMAs and EMAs

#### BOBASMA HORIZONTAL SAFETY MONITORING REPORT

(Presented by BOBASMA/India)

##### SUMMARY

This paper presents the periodic safety assessment for the implementation of 50 NM Reduced Horizontal Separation in the Bay of Bengal Arabian Sea Indian Ocean airspace for the period January to December 2025.

## 1. INTRODUCTION

1.1 The annual Safety review for the continued safe use of 50 NM Reduced Horizontal Separation (RHS) on Sixteen routes in the Bay of Bengal Arabian Sea Indian Ocean airspace, for the year 2025 was conducted using the Traffic Sample Data (TSD) of December 2025 of Chennai, Kolkata, Mumbai, Colombo, Dhaka, Karachi, Male, and Yangon FIRs. The Large Lateral Deviation (LLD) and Large Longitudinal Error (LLE) reports received by BOBASMA for the period 1 January 2025 to 31 December 2025 was used for conducting the safety assessment.

## 2. DISCUSSION


2.1 The Report of the Safety Assessment conducted for monitoring the Horizontal Safety Risk is attached as **Appendix A**.

### Executive Summary

2.2 **Table 1** summarizes the Bay of Bengal Arabian Sea Indian Ocean Airspace Horizontal Risk estimates. **Figure 1** presents the Lateral and Longitudinal collision risk estimate trends for BOBASIO airspace during the period January 2025 to December 2025.

**Table 1.** Bay of Bengal Arabian Sea Indian Ocean Airspace Horizontal Risk Estimates

| Bay of Bengal Arabian Sea Indian Ocean Airspace<br>Estimated annual flying hours = 617741 Hours<br>(Note: Estimated Hours based on Dec 2025 Traffic Sample Data) |                          |                      |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------|-----------|
| Source of Risk                                                                                                                                                   | Risk Estimation          | TLS                  | Remarks   |
| RASMAG 30 Lateral Risk                                                                                                                                           | $1.59777 \times 10^{-9}$ | $5.0 \times 10^{-9}$ | Below TLS |
| RASMAG30 50NM Longitudinal Risk                                                                                                                                  | $1.65722 \times 10^{-9}$ | $5.0 \times 10^{-9}$ | Below TLS |
| Lateral Risk                                                                                                                                                     | $1.32085 \times 10^{-9}$ | $5.0 \times 10^{-9}$ | Below TLS |
| 50NM Longitudinal Risk                                                                                                                                           | $1.48931 \times 10^{-9}$ | $5.0 \times 10^{-9}$ | Below TLS |

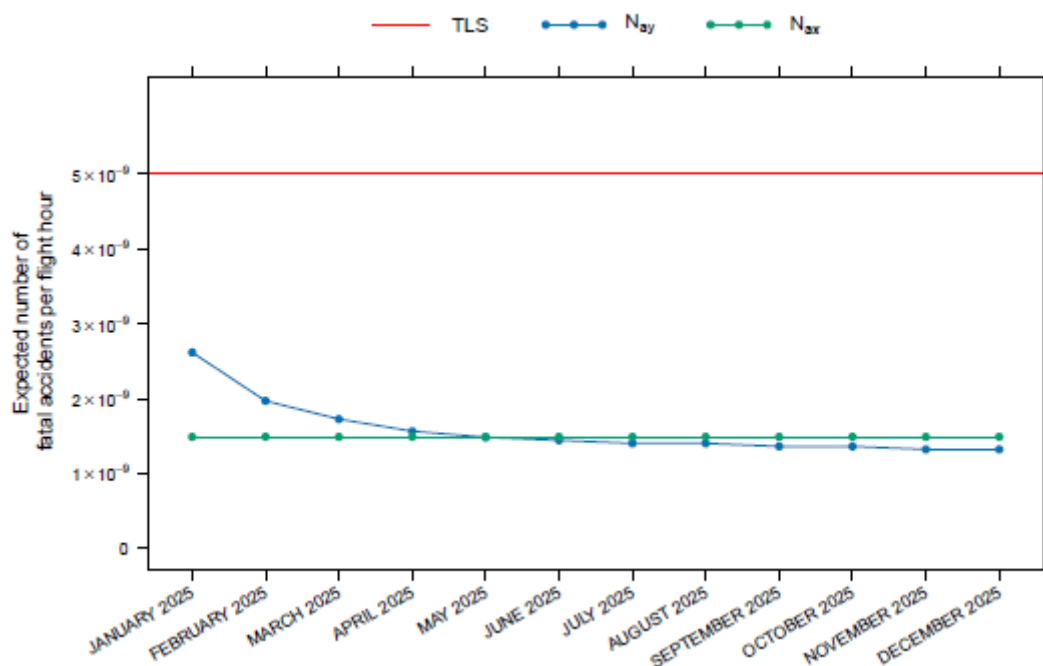

**Figure 1.** Bay of Bengal Arabian Sea Indian Ocean Airspace RVSM Risk Estimates

2.3 **Table 2** presents a summary of the LLD causes within the Bay of Bengal Arabian Indian Ocean (BOBASIO) airspace from January 2025 until December 2025.

**Table 2.** Summary of BOBASIO Airspace LLD and LLE Reports.

| Code  | Deviation Description                                            | No. |
|-------|------------------------------------------------------------------|-----|
| E     | ATC transfer of control coordination errors due to human factors | 0   |
| Total |                                                                  | 0   |

### 3. ACTION BY THE MEETING

3.1 The meeting is invited to:

- a) note the information contained in this paper; and
- b) discuss any relevant matters as appropriate.

## APPENDIX A

### ASSESSMENT OF LATERAL AND LONGITUDINAL COLLISION RISK OF BOBASIO AIRSPACE IN 2025

#### 1. INTRODUCTION

In this article we reinvestigate the collision risk between two aircraft flying over the Bay of Bengal, Arabian Sea and Indian Ocean (BOBASIO) region. This safety assessment is undertaken jointly by Airports Authority of India (AAI) and the Indian Statistical Institute, Delhi Centre, India. The aim of this study is to confirm that the Target Level of Safety (TLS) which is  $5 \times 10^{-9}$  fatal accidents per flight hour, is currently met.


We first observe that in the BOBASIO region, the Longitudinal separation standard currently is 50 NM on routes M300, N571, P574, P570, L301, L507, L510, L759, M770, N563, N877, N895, P628, P646, P761 and P762. The lateral separation between two parallel routes is at least 50NM for all routes.

In this article we carry out the quantitative risk analysis based on two types of datasets supplied by eight FIRs in the region.

- Traffic Sample Data (TSD):

Traffic sample data from eight FIRs Chennai, Kolkata, Mumbai, Colombo, Dhaka, Karachi, Male and Yangon FIRs for the month of December 2025 was used. The original data contained some anomalies, which we tried to detect and remove. Briefly, the following initial filtering criteria were used:

- Duplicate records were removed.
- Records with flight level less than F280 were removed.
- Records with flight level more than F500 were removed.
- Records with unusually high or low traversal times were removed.

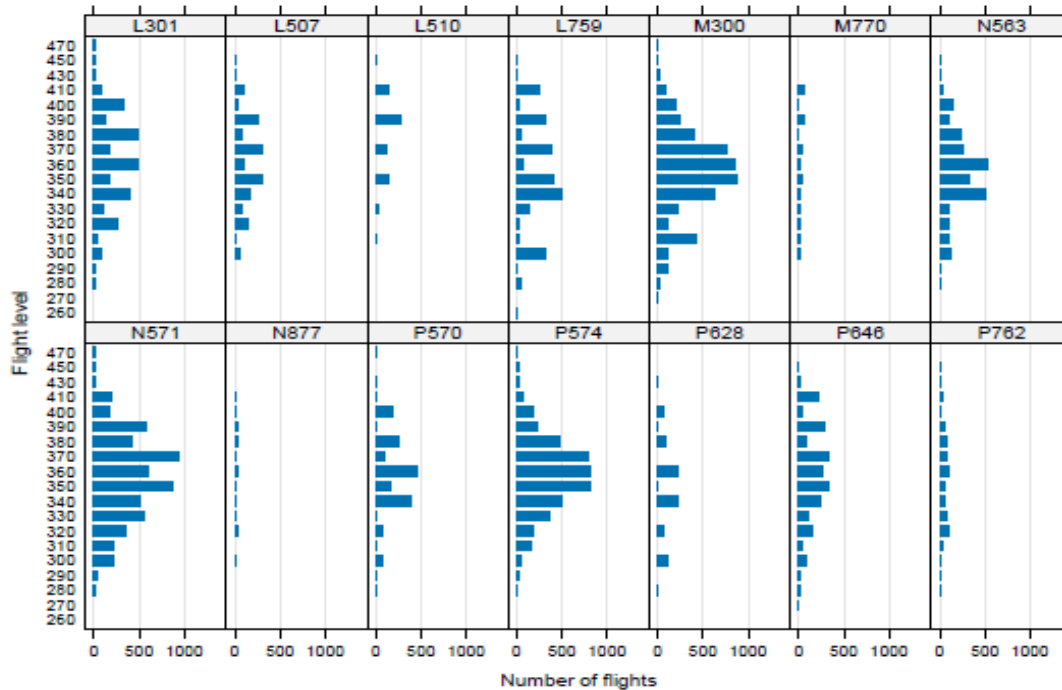

**Figure 1.** Number of flights by route and flight level based on December 2025 TSD

**Appendix A**

45554 records that were retained after filtering were considered for the subsequent statistical analysis. **Figure 1** provides a graphical summary of the number of flights by route and flight level for RHS routes.

- Gross Navigational Error (GNE) Data:

Reports of Gross Navigational Errors for the preceding twelve-month period were received from Chennai, Kolkata, and Mumbai, as summarized in **Table 1**.

| Year | Month     | FIR     | Flights | LLD | LLE |
|------|-----------|---------|---------|-----|-----|
| 2025 | JANUARY   | KOLKATA | 3633    | 0   | 0   |
| 2025 | FEBRUARY  | KOLKATA | 3227    | 0   | 0   |
| 2025 | MARCH     | KOLKATA | 3100    | 0   | 0   |
| 2025 | APRIL     | KOLKATA | 4372    | 0   | 0   |
| 2025 | MAY       | KOLKATA | 3989    | 0   | 0   |
| 2025 | JUNE      | KOLKATA | 3649    | 0   | 0   |
| 2025 | JULY      | KOLKATA | 3779    | 0   | 0   |
| 2025 | AUGUST    | KOLKATA | 3578    | 0   | 0   |
| 2025 | SEPTEMBER | KOLKATA | 1994    | 0   | 0   |
| 2025 | OCTOBER   | KOLKATA | 2745    | 0   | 0   |
| 2025 | NOVEMBER  | KOLKATA | 3473    | 0   | 0   |
| 2025 | DECEMBER  | KOLKATA | 3615    | 0   | 0   |
| 2025 | JANUARY   | CHENNAI | 12672   | 0   | 0   |
| 2025 | FEBRUARY  | CHENNAI | 11194   | 0   | 0   |
| 2025 | MARCH     | CHENNAI | 12249   | 0   | 0   |
| 2025 | APRIL     | CHENNAI | 11365   | 0   | 0   |
| 2025 | MAY       | CHENNAI | 11220   | 0   | 0   |
| 2025 | JUNE      | CHENNAI | 11146   | 0   | 0   |
| 2025 | JULY      | CHENNAI | 11843   | 0   | 0   |
| 2025 | AUGUST    | CHENNAI | 10822   | 0   | 0   |
| 2025 | SEPTEMBER | CHENNAI | 11388   | 0   | 0   |
| 2025 | OCTOBER   | CHENNAI | 11685   | 0   | 0   |
| 2025 | NOVEMBER  | CHENNAI | 12238   | 0   | 0   |
| 2025 | DECEMBER  | CHENNAI | 13461   | 0   | 0   |
| 2025 | JANUARY   | MUMBAI  | 26061   | 0   | 0   |
| 2025 | FEBRUARY  | MUMBAI  | 22656   | 0   | 0   |
| 2025 | MARCH     | MUMBAI  | 25120   | 0   | 0   |
| 2025 | APRIL     | MUMBAI  | 24271   | 0   | 0   |
| 2025 | MAY       | MUMBAI  | 31884   | 0   | 0   |
| 2025 | JUNE      | MUMBAI  | 25531   | 0   | 0   |
| 2025 | JULY      | MUMBAI  | 27811   | 0   | 0   |
| 2025 | AUGUST    | MUMBAI  | 26933   | 0   | 0   |
| 2025 | SEPTEMBER | MUMBAI  | 25595   | 0   | 0   |
| 2025 | OCTOBER   | MUMBAI  | 25780   | 0   | 0   |
| 2025 | NOVEMBER  | MUMBAI  | 24662   | 0   | 0   |

|      |          |        |        |   |   |
|------|----------|--------|--------|---|---|
| 2025 | DECEMBER | MUMBAI | 26891  | 0 | 0 |
|      |          | Total  | 495632 | 0 | 0 |

**Table 1:** Summary of reports of Gross Navigational Errors.

In Section 2 we discuss the risk assessment for the lateral direction and Section 3 gives the same for the longitudinal direction.

## 2 Lateral Collision Risk Assessment

### 2.1 Lateral Collision Risk Model

In order to compute the level of safety for lateral deviations of operations on the BOBASIO region we use the *Reich Lateral Collision Risk Model*. It models the lateral collision risk due to the loss of lateral separation between aircraft on adjacent parallel tracks flying at the same flight level. The model is as follows:

$$N_{ay} = P_y(S_y)P_z(0)\frac{\lambda_x}{S_x}\left\{E_y(\text{same})\left[\frac{|\Delta V|}{2\lambda_x} + \frac{|\dot{y}(S_y)|}{2\lambda_y} + \frac{|\dot{z}|}{2\lambda_z}\right] + E_y(\text{opp})\left[\frac{2|\Delta V|}{2\lambda_x} + \frac{|\dot{y}(S_y)|}{2\lambda_y} + \frac{|\dot{z}|}{2\lambda_z}\right]\right\} \quad (1)$$

We would like to note that same model has been used for the safety assessment study of the *South China Sea* which was carried out by SEASMA and also in European safety assessment which was carried out for EUR/SAM corridor.

The parameters in the equation (1) are defined as follows:

- $N_{ay}$ : = Expected number of fatal accidents (two for every collision) per flight hour due to the loss of lateral separation between co-altitude aircrafts flying on tracks with planned  $S_y$  NM lateral separation.
- $S_y$ : =Minimum planned lateral separation.
- $\lambda_x$ : = Average length of an aircraft flying in BOBASIO region.
- $\lambda_y$ : = Average wing span of an aircraft flying in BOBASIO region.
- $\lambda_z$ : = Average height of an aircraft flying in BOBASIO region.
- $P_y(S_y)$ : = The probability of lateral overlap of aircraft nominally flying on adjacent flight paths, separated by  $S_y$ .
- $P_z(0)$ : =Probability of vertical overlap of two aircrafts assigned the same flight path at the same flight level.
- $S_x$ : =Length of half the interval in NM used to count proximate aircraft at adjacent routes.
- $E_y(\text{same})$ : = Same direction lateral occupancy at same assigned flight level.
- $E_y(\text{opp})$ : = Opposite direction lateral occupancy at same assigned flight level.
- $|\Delta V|$ : = Average relative speed of two aircraft flying on parallel routes in same direction.
- $|V|$ : = Average ground speed on an aircraft.

- $|y'(S_y)|$ : = Average relative lateral speed of aircraft pair at loss of planned lateral separation of  $S_y$ .
- $|z'|$ : = Average relative vertical speed of a co-altitude aircraft pair assigned to the same route.

A collision, and consequently two fatal accidents, can only occur if there is overlap between two aircraft in all three dimensions simultaneously. Equation (1) gathers the product of the probabilities of losing separation in each one of the three dimensions.

As it has already been said,  $P_z(0)$  is the probability of vertical overlap;  $P_y(S_y)$  is the probability of lateral overlap and the combinations of  $\frac{\lambda_x}{S_x} E_y(\text{same})$  and  $\frac{\lambda_x}{S_x} E_y(\text{opp})$  relate to the probability of longitudinal overlap of aircraft on adjacent parallel tracks and at the same flight level. All the probabilities can be interpreted as proportions of flight time in the airspace during which overlap in the pertinent dimension occurs. As the collision risk is expressed as the expected number of fatal accidents per flight hour, the joint overlap probability must be converted into number of events involving joint overlap in the three dimensions, relating overlap probability with passing frequency. Here we note that passing frequency between two adjacent routes is the average number of events, per flight hour, in which two aircraft are in longitudinal overlap when travelling in the opposite or same direction at the same flight level. This is achieved by means of the expressions within square brackets in Equation (1). Each of the terms within square brackets represents the reciprocal of the average duration of an overlap in one of the dimensions. For example,  $\frac{|\bar{V}|}{2\lambda_x}$  is the reciprocal of the average duration of an overlap in the longitudinal direction for same direction traffic. In the case of longitudinal direction too, but for opposite direction, the average relative speed is  $2\bar{V}$  and the average overlap time is  $\frac{2|\bar{V}|}{2\lambda_x}$ .

The model is based on the following hypothesis:

- All routes are parallel.
- All collisions normally occur between aircraft on adjacent routes, although, if the probability of overlap is significantly large, they may also occur on non-adjacent routes.
- The entry times into the track system are statistically independent.
- The lateral deviations of aircraft on adjacent tracks are statistically independent.
- The vertical, longitudinal and lateral deviations of an aircraft are statistically independent.
- The aircraft are replaced by rectangular boxes.
- There is no corrective action by pilots or ATC when two aircraft are about to collide.

The model also assumes that the nature of the events making up the lateral collision risk is completely random. This implies that any location within the system can be used to collect a representative data sample on the performance of the system.

## 2.2 Estimated Values of the Parameters and Estimated Lateral Collision Risk

The following table gives the values of the parameters of the right-hand side of the equation (1) which are obtained from our analysis.

| Parameter   | Estimated Values | Source of the Estimate                |
|-------------|------------------|---------------------------------------|
| $S_y$       | 50 NM            | Current minimum lateral separation.   |
| $\lambda_x$ | 0.04117171 NM    | Estimated from TSD (see Section 2.3). |
| $\lambda_y$ | 0.04308855 NM    | Estimated from TSD                    |

|                 |                          |                                                                                                   |
|-----------------|--------------------------|---------------------------------------------------------------------------------------------------|
|                 |                          | (see Section 2.3).                                                                                |
| $\lambda_z$     | 0.01301296 NM            | Estimated from TSD<br>(see Section 2.3).                                                          |
| $P_y(50)$       | $3.54956 \times 10^{-8}$ | Estimated using a mixture model<br>(see Section 2.4).                                             |
| $P_z(0)$        | 0.538                    | Conservative value used in previous<br>safety assessments<br>(see Section 2.5).                   |
| $S_x$           | 50 NM                    | Conservative value, taken to be the<br>current longitudinal separation in all but<br>four routes. |
| $E_y$ (same)    | 0.06888446               | Estimated from the TSD<br>(see Section 2.6).                                                      |
| $E_y$ (opp)     | 0                        | No opposite directional lateral occupancy<br>at same assigned flight level.                       |
| $ \nabla V $    | 24 knots                 | Value obtained from TSD<br>(see Section 2.7).                                                     |
| $ \dot{y}(50) $ | 75 knots                 | Conservative value taken from EMA<br>Handbook<br>(see Section 2.8).                               |
| $ \dot{z} $     | 1.5 knots                | Conservative value as per EMA<br>Handbook<br>(see Section 2.9).                                   |

Finally, this leads to the following estimate for the lateral collision risk  $N_{ay}$ .

$$N_{ay} = 1.32085 \times 10^{-9}$$

## 2.3 Estimating Average Aircraft Dimensions

**Table 2** summarizes the distribution of aircraft population in the TSD. To be conservative, we used the maximum aircraft dimensions.

|      | Length | Wingspan | Height | Flights |
|------|--------|----------|--------|---------|
| B77W | 73.90  | 64.80    | 18.50  | 6191    |
| A359 | 66.80  | 64.75    | 17.05  | 3846    |
| A320 | 37.57  | 34.10    | 11.76  | 3539    |
| B789 | 62.80  | 60.10    | 16.90  | 2887    |
| B38M | 39.50  | 35.90    | 12.30  | 2864    |
| B738 | 39.20  | 34.40    | 12.57  | 2685    |
| A333 | 63.60  | 60.30    | 16.85  | 2665    |
| A388 | 73.00  | 79.80    | 24.10  | 2190    |
| B788 | 56.70  | 60.10    | 16.90  | 1451    |
| B77L | 63.70  | 64.80    | 18.30  | 919     |
| A321 | 44.51  | 34.10    | 11.76  | 729     |
| A332 | 58.80  | 60.30    | 17.40  | 610     |
| B772 | 63.70  | 60.90    | 18.40  | 494     |
| B763 | 54.90  | 47.60    | 15.90  | 469     |
| B744 | 70.60  | 64.80    | 19.40  | 454     |
| B748 | 76.25  | 68.45    | 19.35  | 190     |
| GLEX | 30.30  | 26.90    | 7.60   | 132     |
| B739 | 41.94  | 34.30    | 12.60  | 110     |
| A343 | 63.60  | 60.30    | 16.85  | 106     |
| A319 | 33.84  | 34.10    | 11.76  | 90      |
| CL60 | 20.85  | 19.60    | 6.30   | 67      |
| GLF5 | 29.40  | 28.50    | 7.50   | 53      |
| C17  | 53.00  | 51.80    | 16.80  | 31      |
| B752 | 47.30  | 38.10    | 13.60  | 29      |
| GL5T | 28.69  | 28.65    | 7.70   | 27      |
| B737 | 33.60  | 34.30    | 12.60  | 27      |
| B742 | 70.60  | 59.60    | 19.30  | 19      |
| B773 | 73.90  | 60.90    | 18.40  | 15      |
| F2TH | 20.20  | 19.30    | 7.10   | 12      |
| GLF4 | 26.90  | 23.70    | 7.40   | 10      |
| A306 | 54.10  | 44.84    | 16.54  | 9       |
| F900 | 20.20  | 19.30    | 7.60   | 8       |
| CRJ2 | 26.80  | 21.21    | 6.30   | 7       |
| A346 | 75.30  | 63.45    | 17.30  | 7       |
| B762 | 48.50  | 47.60    | 15.90  | 6       |
| H25B | 15.60  | 15.70    | 5.40   | 5       |
| A310 | 46.66  | 43.90    | 15.80  | 5       |

**Table 2:** Dimensions of aircraft types in meters, along with number of records in the TSD

## 2.4 Estimating Probability of Lateral Overlap: $P_y(S_y)$

The probability of lateral overlap of aircraft nominally flying on adjacent flight paths, separated by  $S_y$ , is denoted by  $P_y(S_y)$  and is defined as

$$P_y(S_y) = P(|S_y + Y_1 - Y_2| \leq \lambda_y), \quad (2)$$

where  $Y_1$  and  $Y_2$  are assumed to be the lateral deviations of two aircraft which are nominally separated by  $S_y$ . We assume that  $Y_1$  and  $Y_2$  are identically distributed but statistically independent with a distribution  $F_y$ .

We model  $F_y$  as mixture distribution having a core distribution  $G_y$  and a non-core distribution  $H_y$ .

- The core distribution  $G_y$ , represents errors that derive from standard navigation system deviations. These errors are always present, as navigation systems are not perfect and they have a certain precision.

- The non-core distribution  $H_y$ , represents Gross Navigation Errors (GNE), that corresponds to what may be viewed as non-nominal performance.

We assume that a standard navigation system error represented by the core distribution may take large values but the non-core distribution representing gross navigation errors can only take large values. But in most cases it is impossible to determine with certainty if a given observed lateral error arose from the core or from the tail term of the distribution. Therefore, the overall lateral deviation distribution is modelled as:

$$F_y(y) = (1 - \alpha)G_y(y) + \alpha H_y(y). \quad (3)$$

The mixing parameter  $\alpha$  is the probability of a gross navigational error.

The core lateral deviation distribution  $G_y$  is modelled by a Double Exponential distribution with a parameter  $\beta_y > 0$  as the rate, that is, if  $Y_1 \sim G_y$  then

$$P(|Y_1| > y) = e^{-\beta_y y};$$

where  $y \geq 0$ . In other words, we assume that the core distribution has a density of the form

$$g_y(y) = \frac{\beta_y}{2} e^{-\beta_y y}$$

Finally, the non-core distribution  $H_y$  is modelled by a “Separated Double Exponential” distribution with parameters  $\mu_y > 0$ , representing the “separation and  $\gamma_y > 0$  the rate parameter, that is, if  $Y_2 \sim H_y$  then

$$P(Y_2 > \mu_y + y) = \frac{1}{2} e^{-\gamma_y y} \quad \text{and}$$

$$P(Y_2 > -\mu_y - y) = \frac{1}{2} e^{-\gamma_y y}$$

where  $y \geq 0$ . This really means that the non-core distribution  $H_y$  gives no mass in  $[-\mu_y; \mu_y]$  and outside it decays as a Double Exponential distribution with rate parameter  $\gamma_y$ . The density of this distribution is given by


$$H_y Y = \begin{cases} \frac{\gamma_y}{2} e^{\gamma_y(y+\mu_y)} & \text{if } y < -\mu_y \\ 0 & \text{if } -\mu_y \leq y \leq \mu_y \\ \frac{\gamma_y}{2} e^{-\gamma_y(y-\mu_y)} & \text{if } y > \mu_y \end{cases}$$

This modelling is similar to what has been used by FAA and also in EUR/SAM except here we take a double exponential distribution, namely the core distribution to explain all the typical and atypical errors which are not a gross navigational error, and use the separated double exponential distribution for the


gross navigational errors. This in turn gives a better understanding of the mixing parameter  $\alpha$  which we estimate by taking the 95% upper confidence limit from the available GNE data. This confidence limit does not have a nice formula when one or more GNEs are observed, but can be computed using numerical methods. The value comes out to be

$$\hat{\alpha} = 6 \times 10^{-6},$$

Here we would like to note that even though the non-core distribution  $H_y$  has a discontinuous density  $h_y$ , it does not create difficulty in this risk assessment.

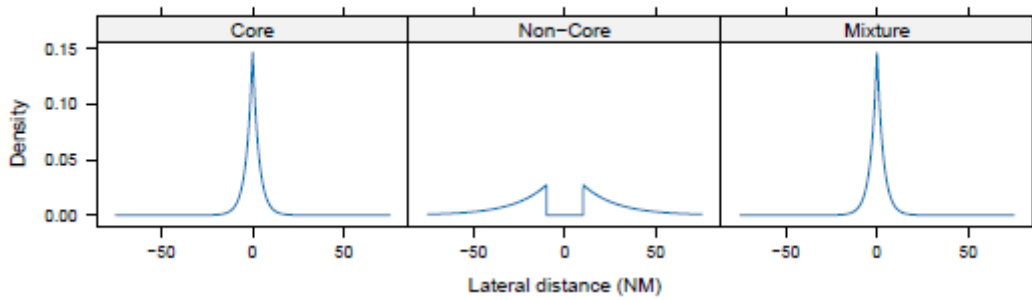

**Figure 2:** Modelling of lateral deviation

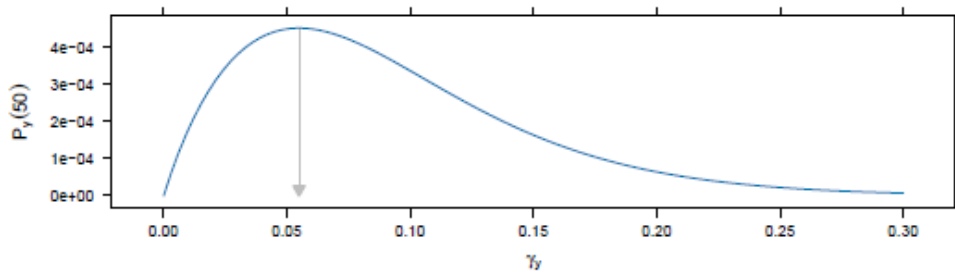

**Figure 3:** Wingspan overlap probability as a function of  $\gamma_y$  with  $S_y = 50$  NM initial separation.

The parameter  $\beta_y$  is estimated under the RNP10 assumption of  $\pm 10$  NM deviation with 95% confidence, this leads to the estimate

$$\hat{\beta}_y = -\frac{\log 0.05}{10} = 0.2995732$$

The parameter  $\mu_y$  is taken to be 10 based on RNP10 consideration and  $\gamma_y$  is then estimated by maximizing the wingspan overlap probability with  $S_y = 50$  NM initial separation (see **Figure 3**). This is a conservative method similar to what has been used by FAA and also in EUR/SAM. The estimated value of  $\gamma_y$  is 0.0548971 leading to the estimated value of  $P_y(50)$  as  $3.54956 \times 10^{-8}$ .

To be conservative, we also considered the possibility of unreported GNEs, and computed the estimates of  $P_y$  (50) and  $N_{ay}$  had we observed more GNEs. The results, given below, are still below the TLS. Note that the actual number of GNEs observed was 0.

| No. of GNEs | $P_y$ (50)               | $N_{ay}$                 |
|-------------|--------------------------|--------------------------|
| 0           | $3.54956 \times 10^{-8}$ | $1.32085 \times 10^{-9}$ |
| 5           | $4.42086 \times 10^{-8}$ | $1.64507 \times 10^{-9}$ |
| 10          | $5.07433 \times 10^{-8}$ | $1.88824 \times 10^{-9}$ |
| 15          | $5.7278 \times 10^{-8}$  | $2.1314 \times 10^{-9}$  |
| 20          | $6.38127 \times 10^{-8}$ | $2.37457 \times 10^{-9}$ |

## 2.5 Estimating Probability of Vertical Overlap: $P_z(0)$

The probability of vertical overlap of aircraft nominally flying at the same flight level on laterally adjacent flight paths is denoted by  $P_z(0)$ . It is defined by

$$P_z(0) = P(|Z_1 - Z_2| \leq \lambda_z),$$

where  $Z_1$  and  $Z_2$  are the height deviations of two aircraft nominally flying at the same flight levels on laterally adjacent flight paths.

We assume that  $Z_1$  and  $Z_2$  are statistically independent with distribution  $F_z$ . Unlike in the computation of  $P_y$  ( $S_y$ ) where we assume the lateral deviations follow a mixture distribution here we may assume that  $F_z$  is a Double Exponential distribution with parameter  $\beta_z > 0$ , that is, with density function

$$f_z(z) = \frac{\beta_z}{2} e^{-\beta_z |z|}$$

One can then estimate  $\beta_z > 0$  by

$$\widehat{\beta_z} = -\frac{\log 0.05}{0.032915} = 91.0142$$

This is under assumption that a typical aircraft stays within  $\pm 200$  ft =  $\pm 0.032915$  NM of its assigned flight level 95% of the time. This leads to an estimated value 0.4230008 for  $P_z(0)$ .

Unfortunately, this analysis ignores both the effect of large height deviations (LHDs) and aircraft altimetry system errors (ASE) which are not estimable directly. So, we use a conservative value of 0.538, as used by MAAR for vertical safety assessment in BOB region.

## 2.6 Estimating the Lateral Occupancy Parameters: $E_y$ (same) and $E_y$ (opp)

In equation (1) there are two occupancy terms, one for same direction occupancy  $E_y$  (same) and another one for opposite direction occupancy  $E_y$  (opp).

Same direction occupancy is defined as the average number of aircraft that are, in relation to a typical aircraft

- flying in the same direction as it;
- nominally flying on tracks one lateral separation standard away;
- nominally at the same flight level as it; and
- within a longitudinal segment centered on it.

The length of the longitudinal segment,  $2S_x$ , is usually considered to be the length equivalent to 20 minutes of flight resulting to a value of 160 NM. It has been verified that the relationship between  $S_x$  and the occupancy is quite linear.

A similar set of criteria can be used to define opposite direction occupancy, just replacing “flying in the same direction” by “flying in the opposite direction”. Occupancy, in general, relates to the longitudinal overlap probability and can be obtained by the equation

$$E_y = \frac{2T_y}{H},$$

where  $T_y$  represents the total proximity time generated in the system and  $H$  is the total flight hours generated in the system during the considered period of time.

We estimate this quantity by direct estimation from time at waypoint passing using the TSD. For this we compute the number of proximate pairs by comparing the time at which an aircraft on one route passes away point with the time at which another aircraft on a parallel route passes the homologous waypoint. When the difference between passing times is less than certain value, 10 minutes in this case, it is considered that there is a proximate pair in that pair of routes. Occupancy is then calculated using the following expression:

$$E_y = \frac{2n_y}{n},$$

where the numerator  $n_y$  is the number of proximate pairs and the denominator,  $n$ , is the total number of aircraft. The observed number of proximate pairs and the total number of flights per route pair are summarized in **Table 3**.

| WP1    | WP2   | Proximate | Total |
|--------|-------|-----------|-------|
| BIDEX  | ORARA | 0         | 1424  |
| IGOGU  | IGREX | 388       | 4636  |
| NOPEK  | IGOGU | 300       | 4162  |
| GIRNA  | IDASO | 166       | 4740  |
| VATLA  | ORARA | 0         | 1156  |
| IGOGU  | EMRAN | 244       | 3804  |
| LIBDI  | MEPEL | 12        | 1354  |
| RINDA  | SAGOD | 136       | 4496  |
| MEPEL  | IBITA | 44        | 2008  |
| IBITA  | TEBOV | 126       | 2980  |
| SAGOD  | IBITA | 66        | 2606  |
| POMAN  | IGAMA | 0         | 2826  |
| KITLAL | LOTAV | 318       | 6030  |
| LOTAV  | REXOD | 874       | 7378  |
| TOTOX  | REXOD | 916       | 6804  |
| TOTOX  | PARAR | 2806      | 11690 |
| ADPOP  | SUGID | 0         | 4426  |
| RASKI  | PARAR | 578       | 8140  |
| NOBAT  | SUGID | 0         | 4426  |
| POMAN  | ODOLI | 0         | 2826  |
| KITLAL | ASPUX | 0         | 572   |
| NISOK  | NIXUL | 0         | 158   |
| NIXUL  | TOPIN | 0         | 186   |
| SULTO  | DUGOS | 0         | 666   |
| ATETA  | DEMON | 0         | 6     |
| DEMON  | BASUR | 0         | 392   |
| UDULO  | KAKIB | 0         | 3414  |
| BUBKO  | DOPID | 0         | 2864  |
| VATLA  | MABUR | 0         | 1156  |
| SAGOD  | MEPEL | 0         | 874   |
| MIPAK  | LALAT | 0         | 3042  |

**Table 3:** Number of laterally proximate flights per route pair, based on TSD.

## 2.7 Estimate of Average Relative Longitudinal Speed: $|\overline{\Delta V}|$

$|\overline{\Delta V}|$  is the average relative longitudinal speed between aircraft flying in the same direction. We estimate it from the TSD by taking the differences between the speeds of all the pairs of aircraft that constitute a lateral proximate pair in the same direction.  $|\overline{\Delta V}|$  is estimated as the mean absolute value of all the calculated differences, which turns out to be 23.84852. We use the conservative value 24. Here we note that the lateral proximate pairs are already determined while estimating the parameter  $E_y$  (same).

## 2.8 Estimate of Average Relative Lateral Speed: $|\overline{y S(y)}|$

$|\overline{y S(y)}|$  is the average relative lateral cross-track speed between aircraft, flying on adjacent routes separated by  $S_y$  NM at the same flight level, that have lost their lateral separation. The estimation of this parameter generally involves the extrapolation of radar data, speeds and lateral deviations, but such radar data were not available for this study. So, we take a conservative value 75 knots as per the EMA Handbook.

## 2.9 Estimate of Average Relative Vertical Speed: $|\dot{z}|$

$|\dot{z}|$  denotes the average modulus of the relative vertical speed between a pair of aircraft on the same flight level of adjacent tracks that has lost lateral separation. It is generally assumed that  $|\dot{z}|$  is independent of the size of the lateral separation between the aircraft and, for aircraft in level flight, it

can also be considered that there is no dependency of  $|\dot{z}|$  with the vertical separation between the aircraft. As noted by various agencies data on  $|\dot{z}|$  are relatively scarce but typically taken as 1.5 knots which is considered to be conservative (see EMA Handbook).

### 3 Longitudinal Collision Risk Assessment

In order to compute the level of safety for longitudinal deviations of operations on the BOBASIO region we use the Longitudinal Collision Risk Model. It models the longitudinal collision risk due to the loss of longitudinal separation between aircrafts flying on the same route at the same flight level. The model is as follows:

$$N_{ax} = P_y(0)P_z(0) \frac{2\lambda_x}{|\dot{x}|} \left( \frac{|\dot{x}|}{2\lambda_x} + \frac{|\dot{y}(0)|}{2\lambda_y} + \frac{|\dot{z}|}{2\lambda_z} \right) X \left[ \sum_{k=m}^M 2Q(k)P(K > k) \right] \quad (4)$$

We would like to note that the same model has been used for the safety assessment study of the South China Sea which was carried out by SEASMA.

The parameters in the equation (4) are defined as follows:

- $N_{ax}$ : = Expected number of fatal accidents (two for every collision) per flight hour due to the loss of longitudinal separation between co-altitude aircrafts flying on the same track with planned minimum m NM longitudinal separation.
- m: = Minimum longitudinal separation in NM.
- M: = Maximum initial longitudinal separation between aircraft pair which will be monitored by ATC in order to prevent loss of longitudinal separation standard.
- $\lambda_x$ : = Average length of an aircraft flying on BOBASIO region.
- $\lambda_y$ : = Average wingspan of an aircraft flying on BOBASIO region.
- $\lambda_z$ : = Average height of an aircraft flying on BOBASIO region.
- $P_y(0)$ : = Probability of lateral overlap of two aircrafts assigned same flight route and flight level.
- $P_z(0)$ : = Probability of vertical overlap of two aircrafts assigned the same flight path at the same flight level.
- $|\dot{x}|$ : = Minimum relative along-track speed necessary for following aircraft in a pair separated by m NM at a reporting point to overtake lead aircraft at the next reporting point.
- $|\dot{y}(0)|$ : = Relative across-track speed of same route aircraft pair.
- $|\dot{z}|$ : = Average relative vertical speed of a co-altitude aircraft pair assigned to the same route.

- $Q(k)$ : = Proportion of aircrafts for which the following aircraft has initial longitudinal separation  $k$ .
- $P(K > k)$ : = Probability that a pair of same route co-altitude aircraft with initial longitudinal separation  $k$  will lose at least as much as  $k$  longitudinal separation before correction by ATC.

Once again, a collision, and consequently two fatal accidents, can only occur if there is overlap between two aircraft in all three dimensions simultaneously. Equation (4) gathers the product of the probabilities of losing separation in each one of the three dimensions.

The equation is derived under similar assumption as done in the case of lateral collision risk assessment. We should note here the first part of the right-hand side of the equation (4) gives the probability of a collision given an event of overtake of a front aircraft by a behind aircraft when both are nominally flying at the same route at the same flight level, and the second part which is inside the square bracket is the expected number of aircrafts involved in such overtake events.

### 3.1 Estimated Values of the Parameters and Estimated Longitudinal Collision Risk for Routes with 50 NM Longitudinal Separation

The following table gives the values of the parameters of the right-hand side of the equation (4) which are obtained from our analysis.

| Parameter      | Estimated Values | Source of the Estimate                                                                 |
|----------------|------------------|----------------------------------------------------------------------------------------|
| $m$            | 50 NM            | Current minimum longitudinal separation (due to RHS).                                  |
| $M$            | 160 NM           | Conservative value corresponding to 20 minutes separation.                             |
| $\lambda_x$    | 0.04117171 NM    | Estimated using flights on 50NM routes only.                                           |
| $\lambda_y$    | 0.04308855 NM    | Estimated using flights on 50NM routes only.                                           |
| $\lambda_z$    | 0.01301296 NM    | Estimated using flights on 50NM routes only.                                           |
| $P_y(0)$       | 0.2              | Conservative estimate (see Section 3.1.1).                                             |
| $P_z(0)$       | 0.538            | Conservative value used in previous safety assessments (see Section 2.5).              |
| $ \dot{x} $    | 22 knots         | Conservative estimate using speed and distance between way points (see Section 3.1.2). |
| $ \dot{y}(0) $ | 1 knot           | RASMAG/9 safety assessment (see Section 3.1.3).                                        |
| $ \dot{z} $    | 1.5              | Conservative value as per EMA Handbook (see Section 2.9).                              |
| $Q(k)$         | See Table 4      | Obtained from TSD (see Section 3.1.4).                                                 |
| $P(K > k)$     | See Table 4      | Computed using normal model on speed (see Section 3.1.5).                              |

Finally, this leads to the following estimate for the longitudinal collision risk  $N_{ax}$ .

$$N_{ax} = 1.48931 \times 10^{-9}$$

### 3.1.1 Estimating Probability of Lateral Overlap: $P_y(0)$

$P_y(0)$  is defined as the probability of lateral overlap of aircraft nominally flying at adjacent flight levels on same route. We can now use the same mixture model of Section 2.4 to compute this parameter by substituting  $S_y = 0$  in the equation (2). This leads to an estimate of  $P_y(0)$  as 0.2.

However as noted earlier in the EUR/SAM report, this factor  $P_y(0)$  has a significant effect on the risk estimate. Therefore, it should not be underestimated.  $P_y(0)$  will increase as the lateral navigational performance of typical aircraft improves, causing a corresponding increase in the collision risk estimate. As reported in the EUR/SAM report, the RGCSP was aware of this problem and attempted to account for improvements in navigation systems when defining the RVSM global system performance specification. Based on the performance of highly accurate area navigation systems observed in European airspace, which demonstrated lateral path-keeping errors with a standard deviation of 0.3 NM, the RGCSP adopted a value of 0.059 as the value of  $P_y(0)$  for the global system performance.

| $k$ (mins) | $k$ (NM) | $Q(k)$     | $P(K > k)$                |
|------------|----------|------------|---------------------------|
| 1          | 8        | 0.00000000 | $2.14988 \times 10^{-1}$  |
| 2          | 16       | 0.00000000 | $8.03517 \times 10^{-2}$  |
| 3          | 24       | 0.00000000 | $2.29119 \times 10^{-2}$  |
| 4          | 32       | 0.00000000 | $4.74509 \times 10^{-3}$  |
| 5          | 40       | 0.00000000 | $7.006 \times 10^{-4}$    |
| 6          | 48       | 0.00000000 | $7.37768 \times 10^{-5}$  |
| 7          | 56       | 0.00000000 | $5.75827 \times 10^{-6}$  |
| 8          | 64       | 0.02373581 | $3.93729 \times 10^{-7}$  |
| 9          | 72       | 0.03653251 | $3.54844 \times 10^{-8}$  |
| 10         | 80       | 0.05490196 | $5.07495 \times 10^{-9}$  |
| 11         | 88       | 0.06707946 | $8.76065 \times 10^{-10}$ |
| 12         | 96       | 0.06934985 | $1.56046 \times 10^{-10}$ |
| 13         | 104      | 0.07203302 | $2.78797 \times 10^{-11}$ |
| 14         | 112      | 0.06934985 | $4.98206 \times 10^{-12}$ |
| 15         | 120      | 0.07285862 | $8.90294 \times 10^{-13}$ |
| 16         | 128      | 0.07100103 | $1.59096 \times 10^{-13}$ |
| 17         | 136      | 0.06790506 | $2.84304 \times 10^{-14}$ |
| 18         | 144      | 0.06687307 | $5.08051 \times 10^{-15}$ |
| 19         | 152      | 0.06996904 | $9.07887 \times 10^{-16}$ |
| 20         | 160      | 0.06955624 | $1.6224 \times 10^{-16}$  |

**Table 4:** Estimate values of  $Q(k)$  and  $P(K > k)$

As observed by many monitoring agencies and pointed out to us by AAMA, the RGCSP value of  $P_y(0)$  does not acknowledge the close track-keeping observed with RNP 4 or GNSS-equipped RNAV 10/RNP 10 aircraft. Further the EMA Handbook recommends to take a conservative value as 0.2. So, we take this conservative value for our analysis as well.

### 3.1.2 Estimation of the Parameter $\overline{|\dot{x}|}$

$\overline{|\dot{x}|}$  is defined as the minimum relative along-track speed necessary for following aircraft in a pair separated by  $m$  NM at a reporting point to overtake lead aircraft at the next reporting point. Thus if  $d$  is the distance between the two way points and  $v_0$  is the speed of the front aircraft then  $\overline{|\dot{x}|}$  can be computed by the equation

$$\frac{d-m}{v_0} = \frac{d}{v_0 - \overline{|\dot{x}|}}$$

leading to

$$\overline{|\dot{x}|} = \frac{mv_0}{d-m}$$

We conservatively estimate it by taking  $v_0$  as the minimum speed observed in TSD which is 360 NM per hours and the maximum distance between two waypoints on the routes which we study which is  $d = 864$  NM. With  $m = 50$  NM the final estimate turns out to be  $\overline{|\dot{x}|} = 22.11$  knots. We use a conservative value of 22 knots.


### 3.1.3 Estimation of the Parameter $\overline{|\dot{y}(0)|}$

$\overline{|\dot{y}(0)|}$  is defined as the relative cross-track speed of same route aircraft pair. No data is available for estimation of this parameter so we take a conservative value of 1 knot as given in the EMA Handbook.

### 3.1.4 Estimation of the Parameter $Q(k)$


$Q(k)$  is defined as the proportion of aircraft pairs with initial longitudinal separation  $k$ . We estimate its value from the TSD. Flights entering the FIR on different routes and assigned different flight levels were reconsidered separately (see Figure 4), and the waiting times between successive arrivals were tabulated in minutes. We assume an average speed of 8 NM per minute, and compute the proportion  $Q(k)$  as

$$Q(k) = \frac{\text{number of flight pairs with inter-arrival distance } 8k}{\text{total number of flight pairs with at least 80 NM separation}}$$

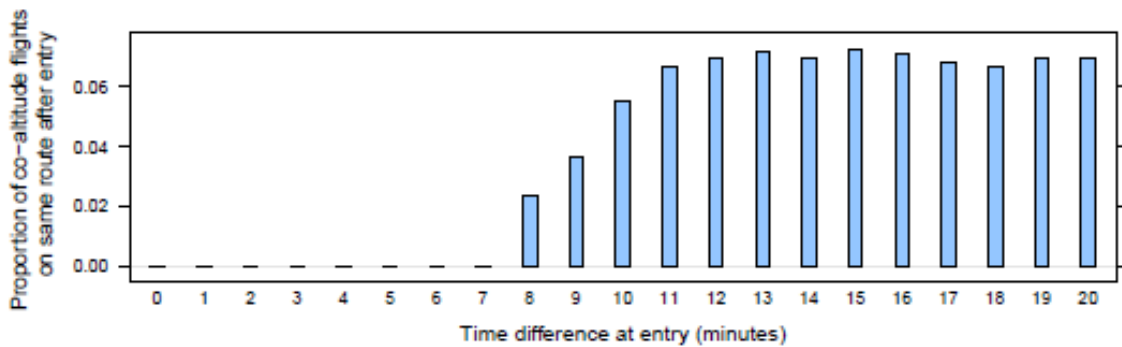

**Figure 4:** Values of  $Q(k)$  estimated from TSD. For co-altitude flights on the same route (after entry / before exit), the proportion of flights that entered  $k$  minutes after the preceding flight is plotted for  $k = 7, 8, 9, \dots, 20$  minutes.

The final estimated values of  $Q(k)$  for  $k$  ranging between 1 and 20 minutes is given in the **Table 4**.

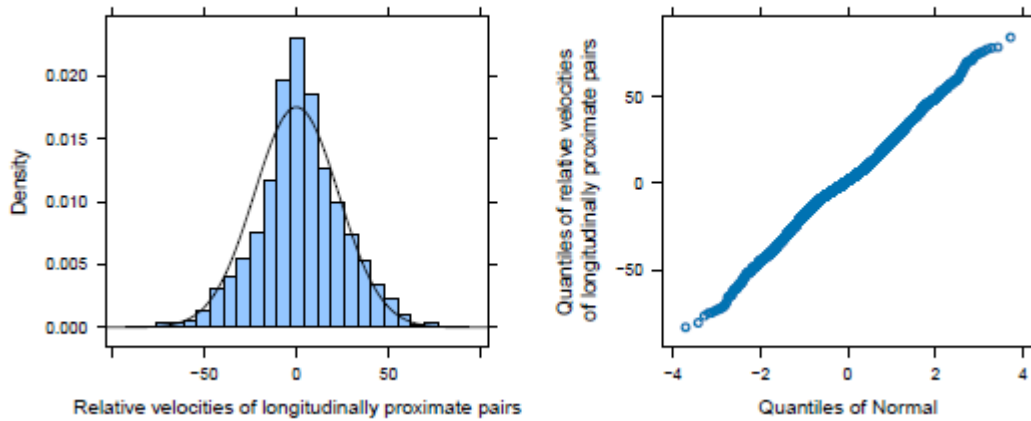

**Figure 5:** Distribution of relative velocities of longitudinally proximate pairs. The Normal distribution does not necessarily seem to be a reasonable fit.

### 3.1.5 Estimation of the Parameter $P(K > k)$

To estimate  $P(K > k)$  we consider two aircrafts flying on same route at same flight levels at the same direction. Let  $V$  and  $V^I$  be their ground speeds of the front and behind aircraft respectively. We assume these speeds to be statistically independent but identically distributed. Let  $T_0$  be the maximum duration of time before ATC intervenes. Then

$$P(K > k) = P\left(0 < \frac{k}{V^I - V} < T_0\right) = P\left(V^I - V > \frac{k}{T_0}\right)$$


We note here that the value of  $T_0$  is conservatively taken to be 0.5 hours.

Now we finally estimate these probabilities using the TSD. For that we consider the difference in velocity of two aircraft nominally flying on the same route at the same flight level, after removing records with unusually high or low traversal times.

We observe that these differences in velocity are symmetrically distributed around zero but from the histogram and the quantile-quantile plot (see **Figure 5**) it is not clear that these differences necessarily Normally distributed. To be conservative, we postulate the following mixture model for the density of these velocity differences.

$$f_v(v) = p \frac{\beta_v}{2} e^{-\beta_v |v|} + (1 - p) \frac{1}{\sqrt{2\pi}\sigma_v} e^{-\frac{v^2}{2\sigma_v^2}}$$

which is a mixture of Double Exponential and Normal densities with mixing proportion  $p$ .

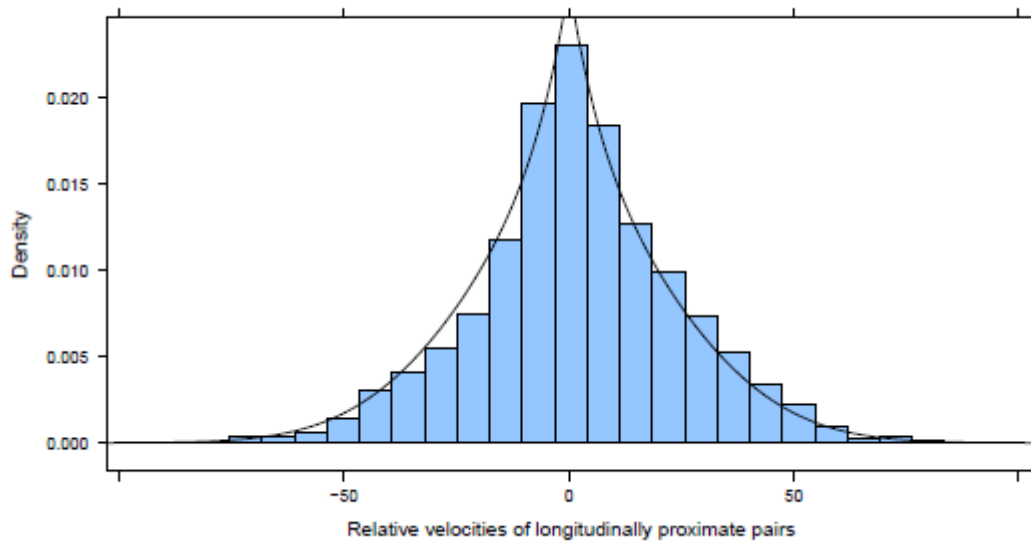

**Figure 6:** Distribution of relative velocities of laterally proximate pairs along with estimated mixture density (estimated using the EM algorithm).

We then estimate the parameters of this mixture model by their maximum likelihood estimates (MLEs). Since this is a mixture model so we use the Expectation-Maximization (EM) algorithm to find the MLEs. The algorithm converged rapidly to give the following estimates:

$$\hat{p} = 0.2942355, \hat{\beta}_v = 0.1076279, \text{ and } \hat{\sigma}_v = 25.7734$$

It is well known in Statistics literature that even though the EM algorithm increases the value of the likelihood it may get trapped in a local maximum. To avoid this problem, we tried several starting values and observed that the algorithm always converges to the same estimated values given above.


So it is statistically reasonable to accept the mixing density with these value of the parameters as a good estimate of the true density of the velocity differences. A graphical representation of the fit is given in **Figure 6**.

With these we estimate the values of  $P(K > k)$  for  $k$  ranging between 7 and 20. These are presented in **Table 4**.

## 4 Summary of the Safety Assessment

The following table gives a summary of the safety assessment of the BOBASIO region for the month of December 2025.

| Type of Risk      | Estimated Risk           | TLS                | Remarks   |
|-------------------|--------------------------|--------------------|-----------|
| Lateral Risk      | $1.32085 \times 10^{-9}$ | $5 \times 10^{-9}$ | Below TLS |
| Longitudinal Risk | $1.48931 \times 10^{-9}$ | $5 \times 10^{-9}$ | Below TLS |

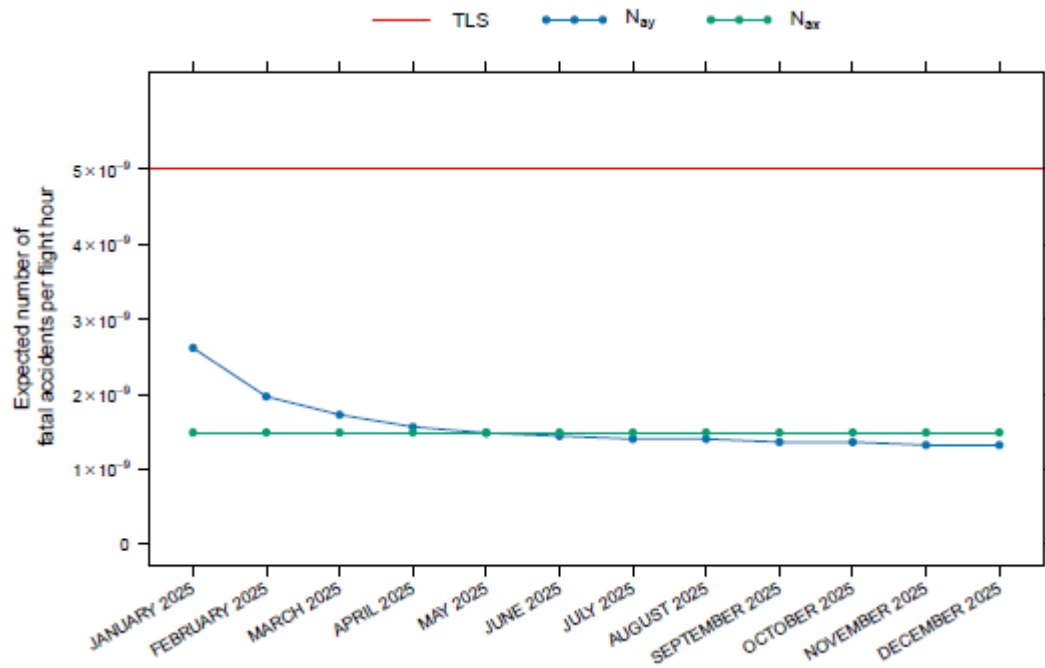

**Figure 7:** Assessment of Compliance with Lateral and Longitudinal TLS Values.

**Figure 7** presents the results of the collision risk estimates for each month using the cumulative 12-month LLD reports since January 2025