



Representing WAFS Significant Weather (SIGWX) Data in BUFR

Version 4.4

May 2026

Table of Contents

1.	THE BUFR FORMAT	9
1.1	INTRODUCTION	9
1.2	SCOPE OF DOCUMENT	9
1.3	CONCEPTS	10
1.3.1	BUFR TABLES	10
1.3.2	REPRESENTATION	10
1.3.3	STANDARDS	10
1.3.4	OPEN/CLOSED AREAS	11
1.3.5	UNIT CONVERSIONS	11
1.3.6	WMO MESSAGE HEADER ID's	11
2.	HEADER REPRESENTATION	12
2.1	MESSAGE HEADER FOR SWH	12
2.2	MESSAGE HEADER FOR SWM	13
3.	FEATURES REPRESENTED	14
3.1	GENERAL GUIDANCE AND RECOMMENDED PRACTICES	16
3.2	HANDLING OF WAFS BUFR BULLETINS THAT CONTAIN NO DATA	19
4.	JET STREAM REPRESENTATION	20
4.1	FEATURE HEADER	22
4.2	FEATURE DATA	22
5.	CAT REPRESENTATION	23
5.1	FEATURE HEADER	23
5.2	FEATURE DATA	24
6.	CLOUD REPRESENTATION	24
6.1	FEATURE HEADER	25
6.2	FEATURE DATA	25
7.	FRONT REPRESENTATION	26
8.	TROP REPRESENTATION	26
8.1	FEATURE HEADER	26
8.2	FEATURE DATA	27
9.	VOLCANOES, SANDSTORMS, TROPICAL CYCLONES AND RADIATION REPRESENTATION	27
9.1	FEATURE HEADER	28
9.2	FEATURE DATA	28
10.	MEDIUM LEVEL SIGWX (SWM) DATA	28
10.1	GENERAL	29
10.2	SWM CLEAR AIR TURBULENCE (CAT)	30
10.3	SWM VOLCANOES, SANDSTORMS, TROPICAL CYCLONES and RADIATION	30
10.4	SWM TROPOPAURE (TROP) HEIGHT	30
10.5	SWM JET STREAMS	31
10.6	SWM FRONTS	31
10.7	SWM CLOUD, IN-CLOUD ICING AND TURBULENCE	31
10.7.1	FEATURE HEADER	32
10.7.2	FEATURE DATA	32
11.	RELEVANT BUFR TABLES	32
12.	CONTACT DETAILS	38
	ANNEX 1 - SYMOBOLS FOR SIGNIFICANT WEATHER	39

DOCUMENT IDENTIFICATION SHEET

DOCUMENT DESCRIPTION

Document title: Representing WAFS Significant Weather (SIGWX) Data in BUFR.

Document Reference Number

Issue : Version 4.4

Date Of Issue : 18/05/2026

Abstract

This document provides guidelines for the correct depiction of WAFS SIGWX data from BUFR code produced by the two World Area Forecast Centres.

Keywords: WAFS SIGWX BUFR

Contact:
Karen Shorey

E-mail:
SADISmanager@metoffice.gov.uk

DOCUMENT CHANGE RECORD

ISSUE	DATE	REASON FOR CHANGE	SECTION PAGES AFFECTED
0.3	Nov. '03	First full draft prepared for joint WAFC BUFR liaison meeting (18/12/03)	All
1.0	21/01/04	Final draft incorporating comments from WAFC liaison meeting.	All
1.1	24/03/04	Minor word change in BUFR table 020008, and some typos corrected.	1.1, 3.1, 4 12,13, 15
1.2	30/03/04	Deletion of word "Typically" to highlight the fact that only one set of frontal movement info should be assigned to each front within the BUFR bulletin.	Section 7.2
1.3	15/04/04	Change to the use of figure 12 in BUFR table 011031	Section 10
1.4	14/05/04	Modifications to jet depiction taking into account the display of the vertical height information.	Section 4
1.5	21/05/04	Inclusion of DRAFT guidance on SWM chart production.	New Section 10
2.0	11/10/04	Refinement of text in section 10, a number of additions and improvements to text throughout the document, in particular section 4.	Section 4 & 10. A few minor changes throughout the document.
2.1	01/11/04	Include modifications following Washington review.	Many sections.
2.2	02/11/04	Minor corrections.	Section 2.2
2.3	10/11/04	Editorial changes	Many sections.
2.4	12/11/04	Editorial changes	sections 2.2 and 11
2.5	16/12/04	Guidance about excluding Himalayan region from Asia South chart.	Section 10.1. New Appendix A.
2.6	22/12/04 21/03/05 09/05/05	Minor changes to text to improve clarity. Additions to text resulting from WAFSOPSG/2 Editorial changes and changes/additions to text. Include comments by Mr CM Shun. Include comments from WAFC Washington	Section 8.1 Section 10.7.2 Section 1.1 Sections 1.1, 1.3.6, 3.1 (new items 6 and 7), 4, 9, and 10.1, (delete) appendix A. Sections 1.2, 1.3.6, 3.1, 7, 10.7.2
2.7	10/05/05 18/05/05 17/06/2005 21/06/2005 22/06/2005 23/06/2005 29/06/2005	Remove reference to replication factor used in MCLLOUD bulletin. Change figure 10 in BUFR table 020008 to red coloured font, and change to explanatory text in section 11. Value 6 in descriptor 020008 change to font colour red. Change "MID" to "MEA". Improvements to text and include more information to describe SWM chart areas. New point 8 in section 3.1 Feedback received and incorporated from NCEP	Section 10.7.1 Section 11 Section 11 Section 10.1 Sections 2.2, 3.1, 4 and 10.1 Section 3.1 Section 10.1
2.8	02/08/2005 10/08/2005 19/09/2005 04/10/2005	New point 9 in section 3.1 New Annex 1 (extract from Appendix 1 to ICAO Annex 3) New guidance to describe depiction of revised jet depth Figures in BUFR tables 020008 and 020012 highlighted in red font Minor modification to text to include PNG charts New chart displaying revised jet depth format. Incorporate changes suggested by WAFC Washington (editorial and an improvement/clarification on words used). Minor editorials suggested by WAFC Washington	Section 3.1 Annex 1 (new) Section 4 (several locations) Section 11 Section 1.1 Section 3 Sections front page (logo), 1.2, 1.3.2, 1.3.6, 2.2, 3.1, 4, 5, 6 (new graphic), 7, 8, and 11. 1.2, 1.3.6, 3.1 - points 6 & 7.
3.0	21/10/2005	Correction – SWH header example modified for T+24 forecast Revised implementation date for new jet depth format (26 July	Section 2.1

	01/02/2006	2006), plus change to wording in wind symbol/fleche example. Include changes following review by WAFC Washington (Larry Burch). Enhanced guidance to cover new jet depth orientation and new graphic to display tropical cyclone in the southern hemisphere.	Section 4
	02/02/2006	Explicit guidance to detail correct orientation when drawing fronts, incl guidance on quasi-stationary fronts. Additional text included to enhance description of drawing cloud boundaries.	Sections 4 and 9
	10/02/2006	Remove reference to crossing jets – WAFSOPSG Memo No. 11 refers. Also, changes to the numbers of figures. Further change to section 4 to cover correct jet wind fleche depiction. Text deletion, and new rule added.	Section 7 Section 6
	22/02/2006		Section 4, and onwards just to the figure numbers.
	16/03/2006		Section 4
	17/03/2006		Section 4 (deletion), section 7 (new rule)
4.0	14/03/2007	Removal of reference to T4 formatted SIGWX charts	1.1, 1.3.6, 3.1, and sections 4, 5, 7 and 10
	14/03/2007	Reference to availability of WAFC Washington BUFR data on SADIS and ISCS broadcasts, and withdrawal of reference to NWS FTP server.	1.2, 1.3.6
	14/03/2007	Reference to operational products on SADIS FTP. Changes to legend box depiction under ICAO Annex 3 Amendment 74 proposals	1.3.1
	14/03/2007	Adoption of flight-level specific jet depth information/depiction ICAO Annex 3 Amendment 74 proposed changes to depiction of surface fronts and intertropical convergence zones (SWH and SWM), and non-CB cloud amount and type (SWM)	3.1
	14/03/2007	Update to contact details	Section 4
	15/03/2007	Removal of reference to Thunderstorms	1.1 and sections 2, 3, 7 and 10
	15/03/2007		Section 12
	19/03/2007		3.1 part 9
4.1	10/12/2007	i) Change to WMO website URL ii) Removal of reference to surface fronts iii) Change HDL to AHL iv) Changes under Amendment 74 to Annex 3 v) Deleted obsolete legend box example vi) Removal of reference to Annex 3 discrepancy related to jet depth vii) Handling of WAFS BUFR bulletins that contain no data viii) Representation of 80KT jetstreams in BUFR data ix) Removal of reference to T4 chart x) Inclusion of reference to sandstorms xi) Editorials to commonly used SWM and/or SWH data xii) Update to template to depict 16 th Edition practices for “ <i>Symbols for Significant Weather</i> ”	i) 1.1 ii) 1.1, plus sections 3, 7 and 10.6. iii) 1.3.6 iv) Footnote 2, plus sections 3.1 (part 9), 3.2 and 10 (parts 10.6 and 10.7) v) 3.1 part 3 vi) 3.1 part 10 vii) Section 3.2 viii) Section 4 ix) Section 5 x) Section 9 xi) Section 11 (020008, 020012, and 008011) xii) Annex 1
4.2		i) Change of WAFC London authority, from Greg Brock to Chris Tyson, and WAFC Washington authority from Larry Burch to Pat Murphy. Changes made in multiple locations, including email etc. ii) Change of example SigWx High Chart – complying with	i)

		iii) new Legend requirements (strictly effective Nov 18th 2010. Specific examples of New Legends. iv) Several modifications to sentence structure – largely minor. v) Changes to more consistently reference tables/figures, and with subsequent re-numbering of same.	
4.3	13/11/2013	i) BUFR Edition used in SIGWX forecasts ii) Revise guidance on placement of call-out arrows, and the necessity to have algorithms that produce unambiguous indications of intended weather iii) Include explicit references to the cloud forms included in SWM and SWH forecasts, and hence SWM and SWH BUFR. iv) Numerous editorial changes (without changing substance of document) including using convention of 'Courier New' font for bulletin IDs. v) Removal of references to ISCS, and replacement with WIFS as appropriate. vi) Inclusion of guidance regarding legend and text box entries for charts containing the 'radioactive materials in the atmosphere' symbol; updated references to BUFR with respect to volcano eruption time vii) Clarified guidance with respect to convention of wind fleches on jetstreams crossing the equator	i) 1.3 ii) 5; 6 iii) 6; 10.7 iv) N/A v) 1.2; 1.3.1; 1.3.6 vi) 3.1 item 3; 9.2 vii) 4
4.4	May 2026	Updated to reflect current SIGWX content (which was changed on 23 January 2025) for clarity. This includes changing CAT to “turbulence”, changes to SWM area coordinates and backup practices and a variety of editorial improvements.	

1. THE BUFR FORMAT

1.1. INTRODUCTION

BUFR stands for Binary Universal Form for the Representation of meteorological data. It is a standard developed by the World Meteorological Organisation (WMO; see WMO Manual 306 Part B for technical specification, which can be obtained via the WMO web site - http://www.wmo.int/pages/prog/www/WMOCodes/WMO306_v12/Volumel.2.html) for the efficient storage of meteorological features in a machine independent form, where all the information to describe the features are contained within the data.

This document has been prepared by the World Area Forecast Centres (WAFCs) for the purpose of providing guidance to software developers who have the task of constructing WAFS SIGWX BUFR visualisation software. The document is designed to assist developers in the construction of compliant visualisation software that receives its data input from text files obtained from BUFR decoding software supplied by WAFC London.

The primary aim of the visualisation software should be to decode and display WAFS SIGWX data in a format that is identical to the equivalent WAFS PNG SIGWX chart in regard to the depiction of the meteorological phenomena (cloud type, coverage and associated icing and turbulence for medium level cloud, volcanoes, tropical cyclones, radiation events, CAT and jet-streams), and largely identical to the PNG product in regard to the display of text boxes (related to areas of cloud, volcanoes, and CAT). It is against this standard that compliances will be measured. In addition, it is recommended that visualisation software can deliver WAFS products to the standards recommended within Annex 3 to the Convention on International Civil Aviation (Meteorological Service for International Air Navigation). In particular, section 4 of Appendix 8 to ICAO Annex 3 provides recommendations related to the presentation of flight documentation. It is strongly recommended that visualisation software can deliver products to these recommended practices.

ICAO and WMO asked WAFC London to implement a software review process that involves assessing the quality of WAFS products produced by different visualisation systems against a list of high level criteria set by the ICAO SADIS Operations Group. Subject to the continuing agreement of the owners of the reviewed software packages, the results from these reviews will be displayed on the WAFC London web site, with the purpose of assisting customers in their software procurement process. The information is currently available from URL: <https://www.metoffice.gov.uk/services/transport/aviation/regulated/sadis/software/suppliers>. It should be stressed that this review process is not considered a certification or an endorsement of one product over another, but is simply an objective analysis of the degree of compliance of the software to display WAFS products in a valid manner. By making the list of compliant software packages widely available to States and individual users via ICAO, it is the intention to use the review process as a mechanism to raise the level of software compliances.

The WAFCs have produced this document with the intention of circulating it to all interested parties. If additional guidance or advice in regard to any of the items included in this document is required, then users, software manufacturers and State Authorities are invited to contact WAFC London. A consultancy service is available to assist these users. Please contact the SADIS manager for further information: - E-mail: SADISmanager@metoffice.gov.uk.

1.2. SCOPE OF DOCUMENT

Sections 4 to 9 outline how each feature is depicted on a HIGH level WAFS Significant Weather chart (SWH) is represented in BUFR. HIGH level data covers 25,000 - 63,000 feet (FL250 to FL630).

Section 10 outlines how each feature is depicted on MEDIUM level WAFS Significant Weather chart (SWM) is represented in BUFR. Medium level data (SWM) which covers 10,000 - 45,000 feet (FL100 to FL450), and includes additional ICING data.

WAFS London and WAFS Washington BUFR encoded SWH and SWM data is available from the SADIS FTP server, and the WAFS Internet File Service (WIFS). These systems, and the provision of BUFR format SIGWX data will be retired in November 2028. The new SIGWX, in IWXXM format is available from the SADIS API and WIFS API systems.

This document outlines the text format used by both the WAFCs to encode and decode HIGH and MEDIUM level SIGWX data in BUFR.

1.3. CONCEPTS

To produce a BUFR file, two elements are needed. Namely:

- i) a file of raw data; and
- ii) a set of tables containing descriptors.

When the raw data is encoded, each data value is attached to a descriptor which defines what that data represents. The decoding process reads the BUFR file, looks up the descriptor in the relevant table, and writes out the information in whatever format is needed.

It is essential to note that the SIGWX BUFR files created by both WAFCs are based upon BUFR Edition 3.

1.3.1. BUFR TABLES

The binary BUFR files contain a set of tables' descriptors and data values. To be able to understand what the values represent, the descriptors need to be decoded from a set of common tables that sit on the local machine. This format means that the BUFR messages are very small and are machine independent. They can be understood and decoded by *any* BUFR decoder which has the latest tables available.

WAFS London and WAFS Washington use an ASCII file to store the raw data. This file is processed to produce a BUFR message. A similar procedure is used to decode BUFR messages into ASCII at the user end.

Examples of this ASCII text format are used throughout this document to explain how SIGWX data is represented in BUFR. The encoder, decoder, and example binary BUFR files, are available on request to WAFS London. Operational, real-time, files are also available from the SADIS FTP Service which is available to all approved SADIS and WIFS users, and manufacturers of commercial WAFS visualisation software.

1.3.2. REPRESENTATION

Data held in the BUFR format is completely independent of the way in which the data is depicted on SIGWX charts. Only the information that describes the feature is encoded. For example, a CLOUD area is a list of points with the height of the base and top, the cloud type and cloud amount attributes attached. There is nothing in the BUFR bulletin about how the cloud area should be drawn, or how the attributes are to be displayed. On SIGWX charts, this is shown as a box, sometimes with a call-out arrow pointing to the area – but this depiction is determined by the graphical display program. This document has been produced to provide a standard in this regard. It is recommended that the overall aim of BUFR visualisation, as stated in section 1.1, should be carefully considered.

1.3.3 STANDARDS

Although no information is given in BUFR on how to visually represent the data, rules have been laid down by the International Civil Aviation Organisation (ICAO) and WMO. The ICAO requirements are laid out in *Annex 3, Meteorological Service for International Air Navigation* in the *International Standards and Recommended Practices* document. The ICAO documentation specifically relates to such elements as the World Area Forecast System (WAFS), how the forecasts should be prepared, the default chart areas (ICAO areas) that should be available and when the charts should be issued. They also include guidance on how the meteorological features are to be depicted on the charts. Further detailed information about these standards is available from WAFC London.

WMO Manual 306 Part B should be the standard used for the BUFR code itself.

1.3.4 OPEN/CLOSED AREAS

The boundaries of areas of cloud and turbulence are described as being either “open” or “closed”, such that:

- i) closed areas are defined as regions that have identical first and last coordinates; and
- ii) open areas have different start and end coordinates.

Both open and closed areas are used by the WAFCs to represent cloud and CAT boundaries. When call-out arrows are used to link these open or closed areas to associated text boxes, it is essential that appropriate algorithms are used to ensure that the intended weather forecast/situation is unambiguously presented to the end user - particularly pilots or flight dispatchers - see sections 5 and 6.

Areas are encoded with an orientation of the area being to the left of the boundary when drawn in the order of points given, i.e. area boundaries are encoded in an anti-clockwise direction.

1.3.5 UNIT CONVERSIONS

On WAFS SIGWX charts, heights are shown in 100s feet (Flight Levels) and speeds in knots. However, in BUFR, these are represented metrically. To convert between imperial and metric measurements, the following conversions should be used:

$$1 \text{ foot} = 0.3048 \text{ metres} \qquad 1 \text{ knot} = 0.51444 \text{ metres/second}$$

1.3.6 WMO MESSAGE HEADER IDs

WAFC London and WAFC Washington produce operational HIGH and MEDIUM level SIGWX BUFR messages issued 4 times a day, and available on the SADIS and satellite broadcasts, the the Secure SADIS FTP service, and WIFS.

The messages and the corresponding WMO abbreviated headers (AHL) are shown in Table 1.

BUFR FEATURES	COMMON NAME	WMO HEADER used by WAFC London	WMO HEADER used by WAFC Washington
Jet-streams	JETS	JUWE96 EGRR	JUWE96 KKCI
Turbulence	CAT	JUCE00 EGRR	JUCE00 KKCI
Embedded Cumulonimbus	CLOUD	JUBE99 EGRR	JUBE99 KKCI
Tropopause height	TROP	JUTE97 EGRR	JUTE97 KKCI
Frontal Systems	FRONTS	JUFE00 EGRR	JUFE00 KKCI
Tropical Cyclone, Sandstorms & Volcanoes	V_T_S	JUVE00 EGRR	JUVE00 KKCI
SWM Tropopause height	M-TROP	JUOE00 EGRR	JUOE00 KKCI
SWM jet-streams	M-JETS	JUTE00 EGRR	JUTE00 KKCI
SWM fronts	M-FRONTs	JUJE00 EGRR	JUJE00 KKCI
SWM icing	M-CLOUD	JUNE00 EGRR	JUNE00 KKCI
SWM Turbulence	M-CAT	JUME00 EGRR	JUME00 KKCI

Table 1 – WMO headers for SIGWX BUFR messages issued by WAFCs London and Washington

NOTE 1: Bulletin JUVE00 EGRR/KKCI is applicable to both high and medium level data.

NOTE 2: Bulletins JUFE00 EGRR/KKCI are retained and transmitted for compatibility but contain no data identifying frontal positions/types.

There is a requirement for the visualisation software to clearly depict the limited coverage areas of the BUFR encoded SWM data. Unlike SWH data, the two WAFCs only issue SWM data in BUFR for the areas currently forecast at medium level in PNG format – i.e. medium level chart areas EURO, MEA, ASIA SOUTH (from WAFC London) and NAT (from WAFC Washington). To ensure that users do not try and produce SWM charts from BUFR data over user defined regions that *do not* contain forecast data, it is recommended that the software indicates, by way of diagonal hatching lines, all geographical areas that are *not* covered by forecast data. The areas for which data is produced at medium level will be described within the SWM bulletins.

2 HEADER REPRESENTATION

A BUFR message will always be packaged between the characters 'BUFR' and '7777'. Before the data representing the features appears, a header is always found that details where the message has come from, the date and validity times and the flight levels it is valid for. At present each feature is encoded into a separate file, each of which have their own header; apart from the volcanoes, storms and radiation events, and SWM cloud¹, SWM in-cloud icing and in-cloud turbulence, which are all included together. In instances where 'no data' is to be represented within a BUFR bulletin, users should refer to section 3.2 below.

2.1 MESSAGE HEADER FOR SWH

Contains general data concerning the origin and validity time for the data.

93					Originating centre.
2001	01	30	18	00	DATA Time - Year, month, day, hour, minute
2001	01	31	18	00	FORECAST Time - Year, month, day, hour, minute
7620			19200		Flight level boundaries (base and top)

¹ Note that under ICAO Annex 3 Amendment 74 (effective 7th November 2007), non-CB cloud amount and type was withdrawn from the SWM products.

2.2 MESSAGE HEADER FOR SWM

Contains general data concerning the origin and validity time for the data, plus information about the areas of data coverage.

```
93          Originating centre.
2004 04    04    12    00  DATA Time - Year, month, day, hour, minute
2004 04    05    12    00  FORECAST Time - Year, month, day, hour, minute
      3050      13720      Flight level boundaries (base and top)
21.4 -21.6, 46.6 -56.6, 58.7 68.4, 26.4 33.4.   Area EURO
10.0 17.0, 44.0 17.0, 44.0 70.0, 10.0 70.0.   Area MEA
0.0 53.0, 36.0 53.0, 36.0 108.0, 0.0 108.0.   Area Asia South
17.2 -54.1, 44.7 -101.7, 50.7 60.3, 19.7 10.0. Area NAT
```

Note: This is an example of a WAFC London header. Areas MEA and ASIA South are both Mercator projection charts. Areas EURO and NAT are both polar stereographic projection charts.

The last four lines of digits contain the latitude and longitude points of the corners of the standard ICAO chart areas for which data is included in the BUFR bulletin. The latitude (lat) and longitude (long) points are plotted in the following order:

BLHC_lat BLHC_long, TLHC_lat TLHC_long, TRHC_lat TRHC_long, BRHC_lat BRHC_long

where BLHC=bottom left hand corner, TLHC=top left hand corner, TRHC=top right hand corner, and BRHC=bottom right hand corner. Negative latitude values are located in the southern hemisphere, and negative longitude values in the western hemisphere. Complete descriptions of the four SWM areas (EURO, MEA, NAT, and ASIA South) are provided in section 10.1.

During automation of the SIGWX forecasts in January 2025, it was decided that the SWM files would always contain all four sets of area coordinates for every forecast issuance, for both WAFCs. Also it was decided to include full global data sets inside of those files for simplicity.

3 FEATURES REPRESENTED

The charts in Figure 1 show an example of SIGWX forecast, including the following HIGH level features:

- Jet-streams
- Turbulence CB Cloud
- Tropopause heights
- Volcanoes

Note that fronts are no longer depicted on WAFS SIGWX forecasts in line with Amendment 74 to ICAO Annex 3 (effective 7th November 2007)

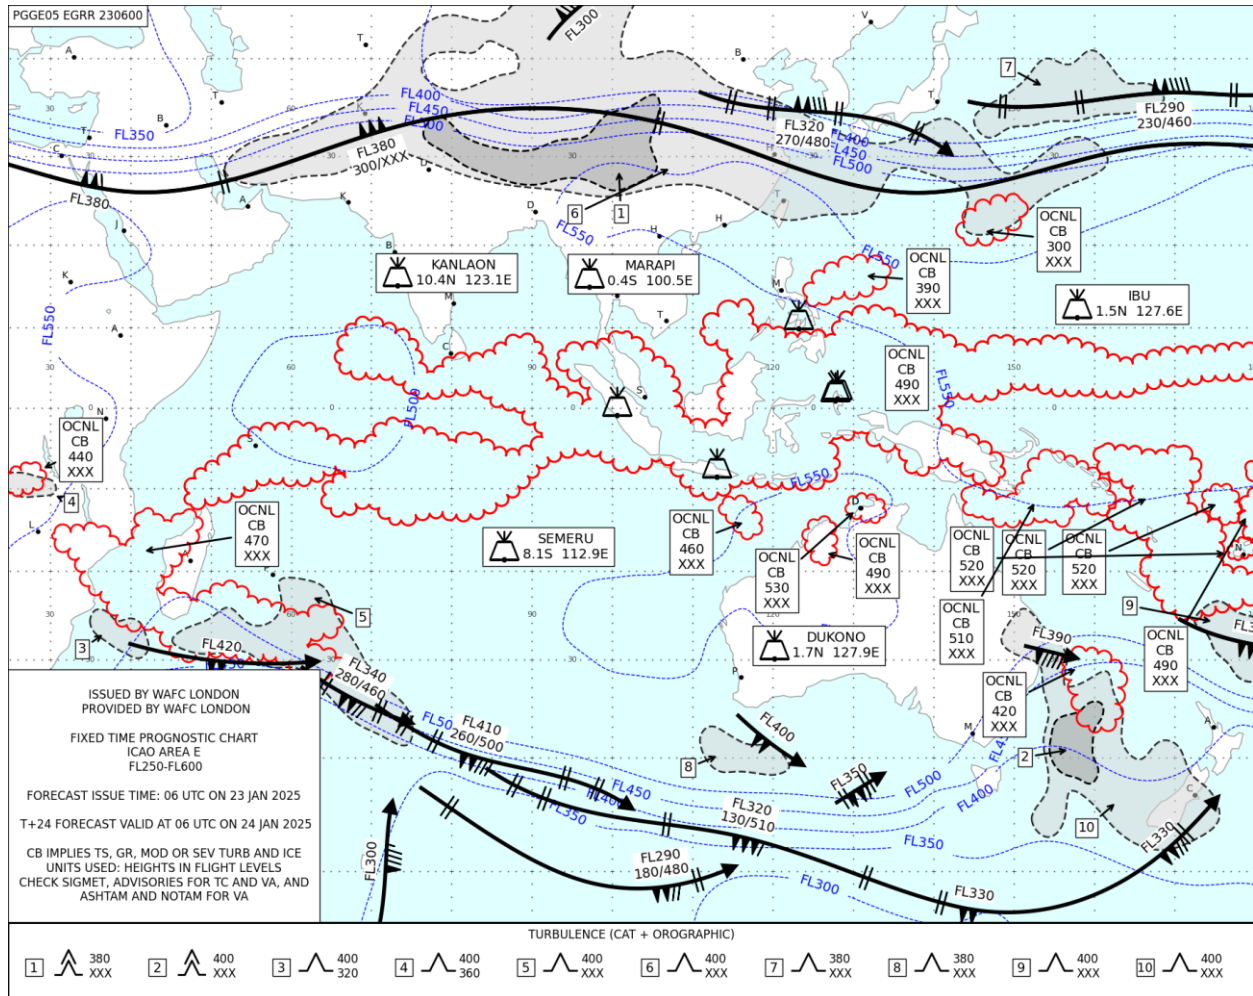


Figure 1 – Example High Level WAFS SIGWX (SWH) chart (WAFC London)

Note that, tropical cyclones, and Radiation events are not depicted in the above SIGWX charts, but would be placed on the chart if the situation dictated.

3.1 GENERAL GUIDANCE AND RECOMMENDED PRACTICES

1. The standard against which software will be reviewed is for WAFS SIGWX charts produced from BUFR to be identical to the equivalent PNG SIGWX chart in regard to the depiction of meteorological information, and largely identical to the depiction of non-meteorological features, which include cloud text boxes, volcano legend boxes and CAT boxes. In addition, it is recommended that visualisation software can deliver WAFS products to the standards recommended within Annex 3 to the Convention on International Civil Aviation. In particular, Appendix 1 of the PANS-MET (Doc 10157) provides recommendations related to the presentation of flight documentation. It is strongly recommended that visualisation software can deliver products to these recommended practices.
2. Chart legends constructed from BUFR should state the *issuing* source of the BUFR data used to create the chart (i.e. WAFC London or WAFC Washington) and also the *provider* of the chart – i.e, the body that has used the source data from the stated WAFC and has generated the chart from that source data for provision to end users. However, if the *providing* body (or suitably qualified representative of the providing body) modifies *any* of the meteorological information contained on the chart, the software must *automatically* remove any reference to the *issuing* source. The addition of new meteorological information, e.g. interpolated jet speeds, using techniques *specified in this document* is permissible. The physical positions of cloud text boxes and CAT boxes can be modified without needing to remove reference to the source of the data.
3. Legends are required to contain textual information as per the examples below. Two examples are provided:

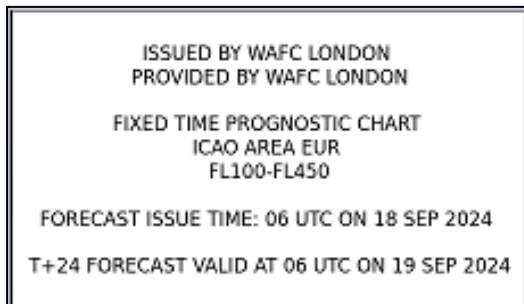


Figure 2 – Legend box indicating that a WAFC is an issuer of the source data, and the provider of the generated chart.

In figure 2 above, the issuer of the source data is WAFC London, and the provider of the chart is WAFC London. Only charts generated and provided to users by the WAFCs themselves will use Legends of this form. If the BUFR data is visualised by a different provider, then that should be reflected in the “provided by” field.

The legend defining the units, and referencing hazards associated with cumulonimbus cloud and instructions to check SIGMETs and TC and VA Advisories should comply with the example in figure 3.

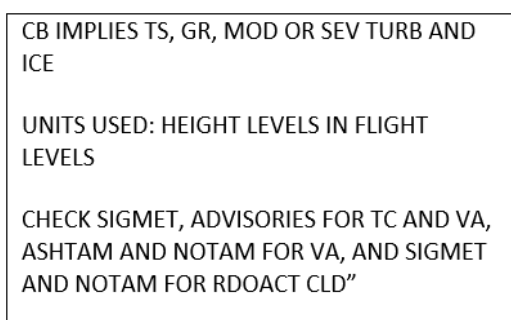


Figure 3 – example legend text for hazards and units.

Any visualisations (either on screen or hard copy) of SIGWX forecasts that include the 'radioactive materials in the atmosphere' symbol, should add the following to the chart legend: 'CHECK SIGMET AND NOTAM FOR RDOACT CLOUD'. This statement can be omitted when radioactive cloud is not present.

A separate text box should be included that includes: the 'radioactive materials in the atmosphere' symbol; latitude/longitude of the release site; the name of the site of the radioactive source (if known)

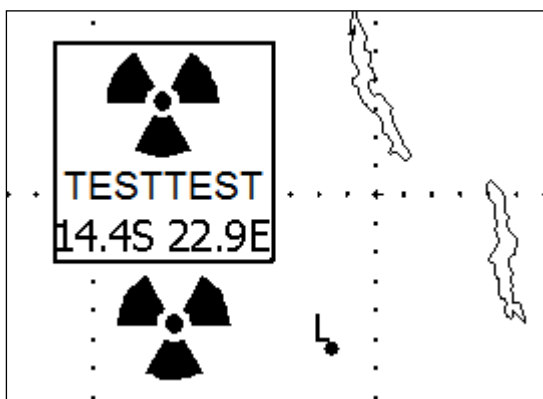


Figure 4 – Example of a separate text box, including the 'radioactive materials in the atmosphere' symbol; latitude/longitude of the release site; and name (in this case 'TESTTEST').

4. The standard ICAO areas (namely A, B, B1, C, D, E, F, G, H, I, J, K and M), with their correct projections, should be available to users as default areas. These include the ability to produce a chart which spans the International Date Line.
5. Production of SIGWX charts for these standard areas should be attainable via an automated process which requires no human intervention to “de-clutter” overlapping or misaligned text boxes. An auto-placement algorithm will need to be employed to determine the location of information that is not assigned with a position in the BUFR message, e.g. the location of cloud text boxes, and turbulence boxes. It is recommended that a manual editing facility is available to users so that the physical locations of these boxes can be changed if required. Attention must be given to the distance of the text boxes from the associated cloud. This is especially important when cloud areas straddle the edge of the depicted area.
6. Particular emphasis should be given to the correct depiction of tropical cyclones, radiation events, and volcanic eruption symbols and associated information. New standards have been agreed with ICAO regarding the depiction of any of these features that are co-incident or partially overlapping. The order of priority for these features is as follows:
 - i) volcanic eruptions; followed by
 - ii) radiation events: followed by
 - iii) tropical cyclones.

These features should be given a plotting priority greater than all other features displayed on the chart. In the event of any of these features being co-incident or partially overlapping then Major aerodromes should be displayed on WAFS SIGWX charts as a dot and identified by the first letter of the name of the city the aerodrome serves as given in Table AOP of the relevant air navigation plan. It is strongly recommended that visualisation software conforms to this ICAO requirement as a minimum, and in addition, ensures that the dots and corresponding letters are not over-plotted by non-meteorological features, which include cloud text boxes, and volcano legends. Over-plotting by all meteorological phenomena (e.g. cloud areas), chart legend and turbulence boxes is permitted.

7. Examples of decoded BUFR bulletins are included in this document. These examples include a "Feature Header", and "Type of Feature" description. It should be noted that the "Type of Feature" is included in this document for clarity purposes, but is not included in the operational BUFR bulletins.
8. Amendment 74 to ICAO Annex 3 (effective 7th November 2007) eliminated the requirement for depiction of surface fronts and well-defined convergence zones (e.g. ITCZ) on WAFS SIGWX forecasts (in BUFR-code and PNG chart form). Due to the downstream implications on users of completely withdrawing the BUFR bulletins related to frontal systems (namely JUFE00 EGRR, JUFE00 KKCI, JUJE00 EGRR and JUJE00 KKCI), it was decided to continue to disseminate these bulletins, but to ensure that they contain no data (i.e. they are empty apart from message header information as described in 2.1 and 2.2 above). Subsequently, the FEATURE HEADER and FEATURE DATA elements of the following BUFR bulletins are no longer shown: JUFE00 EGRR, JUFE00 KKCI, JUJE00 EGRR and JUJE00 KKCI. Further information in section 3.2 below.
9. Data held within the BUFR bulletins does not include a description of the graphical representation of the phenomena, e.g. information describing the volcano symbol graphic, or the symbol used to indicate moderate turbulence. Software will need to be designed so that it displays phenomena using the standard depictions included in the MODEL SN in the PANS-MET (Doc 10156). Part of the MODEL SN is included in Annex 1 to this document to assist developers. However, it should be noted that not all of the elements included in this Annex are utilised on WAFS SIGWX charts. The elements that are utilised include: Tropical Cyclone, Moderate Turbulence, Severe Turbulence, Moderate Aircraft Icing, Severe Aircraft Icing, Radioactive Materials in the Atmosphere, Volcanic Eruption, Widespread Sandstorm or Dust Storm, Tropopause High, Tropopause Low, Tropopause Level, and Position, Speed and Level of Maximum Wind. Note that if the maximum wind speed is 240km/h (120kt) or more, the flight level between which winds are greater than 160km/h (80kt) is placed below the maximum wind level. The scheme depicted in section 4 of this document is in accordance with this recommended practice.

3.2 HANDLING OF WAFS BUFR BULLETINS THAT CONTAIN NO DATA

Due to the downstream implications on users of completely withdrawing the BUFR bulletins related to frontal systems (namely JUFE00 EGRR, JUFE00 KKCI, JUJE00 EGRR and JUJE00 KKCI), it was decided to continue to disseminate these bulletins, but to ensure that they contain no data (i.e. they are empty apart from message header information as described in 2.1 and 2.2 above).

This practice is in accordance with WMO guidelines related to the encoding of BUFR data, whereby BUFR will simply not encode feature types or feature data when there is no data.

Subsequently, the FEATURE HEADER and FEATURE DATA elements of the following WAFS BUFR bulletins are no longer shown (as routine):

```
JUFE00 EGRR;  
JUFE00 KKCI;  
JUJE00 EGRR; and  
JUJE00 KKCI.
```


An example BUFR decode of i) and iii) is now provided as guidance. Users will note that only the MESSAGE HEADER information is depicted, whilst FEATURE HEADER and FEATURE TYPE have been eliminated:

i) SWH fronts bulletin example (JUFE00 EGRR):

```

      93
    2007      11      06      00      00
    2007      11      07      00      00
    7620      19200

```

iii) SWM fronts bulletin example (JUJE00 EGRR):

```

      93
    2007      11      06      00      00
    2007      11      07      00      00
    3050      13720
21.4 -21.6, 46.6 -56.6, 58.7 68.4, 26.4 33.4.
10.0 17.0, 44.0 17.0, 44.0 70.0, 10.0 70.0.
.0 53.0, 36.0 53.0, 36.0 108.0, .0 108.0.
17.2 -54.1, 44.7 -101.7, 50.7 60.3, 19.7 10.0.

```

It is advisable that workstation software is capable of handling BUFR fronts bulletins (outlined above) that contain no data points.

Important note: There may be occasions where a BUFR bulletin, apart from fronts, contains no data. For example, if there was no VTS occurring (volcanoes, tropical storms, sandstorms or radiation events), then the VTS bulletins JUVE00 EGRR and JUVE00 KKCI would contain no feature header element and no feature data elements (i.e. they would be empty apart from the message header). Therefore, workstation providers may consider it advisable to develop software that is capable of handling *any* BUFR bulletin that contains no data, irrespective of type, so that a SIGWX product can be generated.

4 JET STREAM REPRESENTATION

The JET STREAMS shown in Figure 1 (above) can be represented in a text form which the BUFR encoder will understand. It will then be able to code up this data into a BUFR message.

A JET is made up of a series of CORE points, wind symbols (fleche marks) and change bars. The wind symbol at the location of maximum jet speed/speeds also contain vertical depth information in the format J_L/J_U , where J_L = the *flight level* of the 80kt isotach below the maximum wind speed level, and J_U = the *flight level* of the 80kt isotach above the maximum wind speed level. The convention for indicating specific *flight levels* in the jet depth information, as opposed to earlier +/- depth notation, was adopted by the WAFCS in July 2006. Flight level specific jet depth notation is now the required standard. Only jet streams with a speed of 120 knots or more will contain vertical jet depth information.

Core points are encoded in BUFR with a designated latitude and longitude, but no speed or flight level. All of these core points should be used to plot the location of jet-streams. An appropriate smoothing technique such as a cubic spline should be used to smooth the jet-stream curve plotted between these core points. It is not recommended that any other points within the BUFR bulletin are included within the cubic spline routine for smoothing. Care should be taken when applying smoothing techniques not to over-smooth, causing significant deviations from the depicted lines on the equivalent PNG SIGWX charts.

Latitude and longitude points assigned to wind symbols should not be included in the process used to draw the axis of the jet-stream. The wind symbols should be plotted separately along the length of the jet displaying the speed and flight level information assigned to them within the BUFR message. The latitude and longitude points that are assigned to each wind symbol should be viewed as a first estimate of the position of each wind symbol.

This position may be a short distance away from the axis of the jet-stream depending on the degree of alignment between the smoothing algorithms employed at the production and user sites. It is recommended that the end users software utilises a function that computes the nearest position along the jet axis to the location of each wind symbol as provided in the BUFR messages, and automatically plots the wind symbol at this position.

For user defined chart areas that do not contain a jet max wind vertex we recommend that no vertical depth information is derived through interpolation. On such occasions we recommend that the jet is plotted with no vertical depth information, i.e. interpolated jet height values are not used.

If there is insufficient space (less than 15 characters) on the jet-stream to display a full wind symbol, a change bar may be used instead. A change bar depicts a change of speed of 20 knots. Please note that change bars are not used to depict changes in jet height.

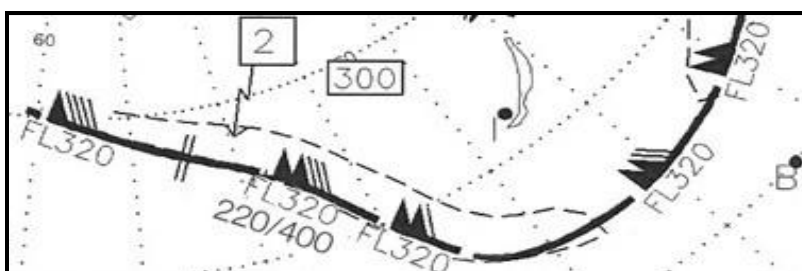


Figure 5 – Example Jet Stream

Note: vertical depth information values are only included for jet-streams with a maximum speed of 120KT or more.

Crossing jets are no longer depicted by the WAFCs on SIGWX products and therefore reference to the depiction scheme from the BUFR encoded data has been removed from this document.



Figure 6 – Northern hemisphere example



Figure 7 – Southern hemisphere example

The WIND SYMBOLS (sometimes called WIND FLECHES) indicate the wind speed, flight level and jet depth (at the point(s) of maximum speed only) for the locations it is positioned at. Each black triangle represents 50 knots, each line 10 knots and each half line 5 knots. The flight level is written in terms of how many 100s feet it is at. The first example (Figure 6, northern hemisphere orientation) gives a speed of 130 knots at 35,000 feet. The second example (Figure 7, southern hemisphere orientation) gives a speed of 130 knots at 40,000 feet. The additional information displayed on both these examples relates to the jet depth. The format of the jet depth information is as follows: J_L/J_U where J_L = the flight level of the 80kt isotach below the maximum wind speed level, and J_U = the flight level of the 80kt isotach above the maximum wind speed level. Only jet streams with a speed of 120 knots or more will contain vertical jet depth information.

For a jet that starts in the northern hemisphere, the speed symbols are displayed to the left of the jet core (as drawn in the order of encoded core points). For a jet that starts in the southern hemisphere, the speed symbols are displayed to the right of the jet axis. As such, the side of the jet on which the speed symbols are placed will not change if a jet crosses the equator. The jet height and depth information are displayed on the opposite side of the jet axis to the speed symbols, with the height information closest to the jet axis for jets in the northern hemisphere, and the jet depth information closest to the jet axis for jets displayed in the southern hemisphere – see examples to the left.




Figure 8 – Example of ‘change bar’

The CHANGE BAR (Figure 8) represents a change of 20 knots along the JET. By ICAO definition, a JET will always start and finish at 80 knots. By using change bars and wind symbols, the speed of a JET can be plotted anywhere along its course. It is recommended that change bars are only plotted when there is insufficient space, less than 15 characters, between WIND SYMBOLS.

It is recommended that the software always plots the maximum wind (using a wind symbol) along the length of the jet-stream, and then works laterally along the length of the jet in both directions using a combination of wind symbols and change bars as appropriate. This approach makes the change bars *maximum speed relative* as opposed to minimum wind (80 KT) relative, i.e. the change bars represent 20-knot steps from the maximum speed rather than from the 80-knot end points.

In BUFR, change bars are not explicitly encoded. The scale of the chart being drawn and the area it covers will determine the proportion of wind symbols to change bars. This will need to be worked out by the graphics program that constructs the chart.




Figure 9 – Jet of maximum speed 80 KT

Under ICAO recommended practices, the WAFCS are required to depict jetstreams of speed 80 knots or more on their SIGWX products. Therefore, on occasion, the WAFCS may include a jetstream of maximum speed 80 knots (as shown left, Figure 9). It has been commented that, under the guidance outlined above, some workstations may not adequately handle the visual representation of the 80 knot jet from the BUFR data – since, the 80 knot data value is also the maximum wind value. In these instances, it is advisable that workstations develop sufficient software code to adequately visualise the 80 knot jet from the BUFR data.

To mitigate against so-called “edge effects”, when jet speed and height information is missing from jets plotted near chart boundaries, it is permissible (indeed recommended) for the software to deduce the flight level at the start and end of jets near chart borders, and at any points in between as required, by assuming that the flight level at a point is the same as it is at the nearest available wind symbol. Similarly, it is recommended that the software applies, when necessary, linear interpolation between wind symbols to establish the speed at any point along a jet axis.

4.1 FEATURE HEADER

Contains the type of data to follow and the number of features in the list.

JET	Type of feature
2	Number of jets in list

4.2 FEATURE DATA

The first row for each jet lists the number of points (both core and wind symbol) in it. Six columns containing latitude, longitude, height information, speed data, height of 80 knot isotach located above jet, and height of 80 knot isotach located below jet follow. Height is stored in metres and speeds in ms^{-1} . The visualization software needs to express the data on charts using conventional Flight Level and knots values.

11						Number of points to follow (1 st jet)
35.4	-104.7	-9999999.0	-9999999.0	-9999999.0	-9999999.0	Core point (no height and speed data)
36.1	-101.6	10668.0	51.5	-9999999.0	-9999999.0	Wind Symbol (speed and height data given)
36.6	-99.6	-9999999.0	-9999999.0	-9999999.0	-9999999.0	
36.9	-97.7	15240.0	61.8	15240.0	13716.0	Wind symbol at position of max speed
37.4	-94.9	-9999999.0	-9999999.0	-9999999.0	-9999999.0	
38.3	-92.3	15240.0	51.5	-9999999.0	-9999999.0	
39.2	-90.3	-9999999.0	-9999999.0	-9999999.0	-9999999.0	
40.7	-88.1	15240.0	61.8	16154.0	14326.0	Wind symbol at position of max speed
41.5	-86.3	-9999999.0	-9999999.0	-9999999.0	-9999999.0	
42.0	-82.7	9144.0	51.5	-9999999.0	-9999999.0	
41.9	-78.9	-9999999.0	-9999999.0	-9999999.0	-9999999.0	
8						Number of points to follow (2 nd jet)
41.1	-101.8	-9999999.0	-9999999.0	-9999999.0	-9999999.0	Core point (no height and speed data)
42.0	-98.8	10668.0	51.5	-9999999.0	-9999999.0	Wind Symbol (speed and height data given)
42.2	-98.5	-9999999.0	-9999999.0	-9999999.0	-9999999.0	
44.3	-96.9	12192.0	61.8	12802.0	11278.0	Wind symbol at position of max speed
45.2	-96.5	-9999999.0	-9999999.0	-9999999.0	-9999999.0	
45.8	-96.3	12192.0	51.5	-9999999.0	-9999999.0	
49.6	-95.5	-9999999.0	-9999999.0	-9999999.0	-9999999.0	
51.4	-95.5	-9999999.0	-9999999.0	-9999999.0	-9999999.0	

5 TURBULENCE REPRESENTATION

Turbulence is represented on a SIGWX chart by a dashed area and a number (See Figure 0). This number relates to the base, top and type information held in the CAT legend box. In BUFR, how the data is depicted is not specified. Only the points describing the line and the attributes associated with that line are held.

Note: Prior to January 2025 this was only clear air turbulence (CAT) but now encompasses both CAT and orographically generated turbulence.

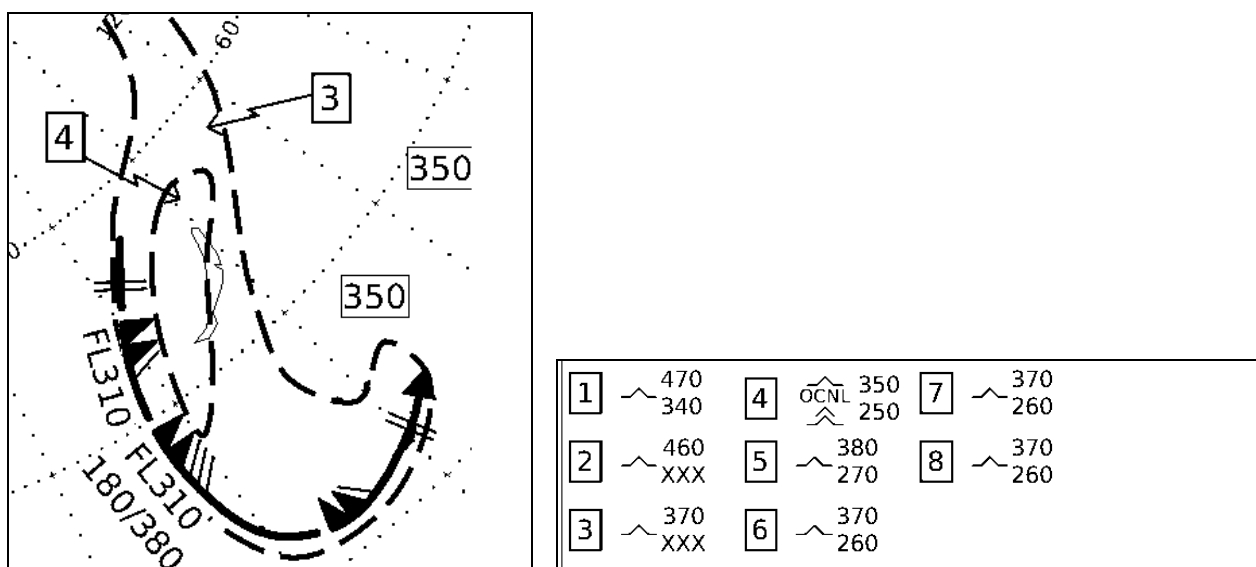


Figure 10 – Turbulence areas and legend box

It is recommended that a cubic spline technique is employed to ensure that a smooth continuous line is plotted between vertices. However, care should be taken when applying smoothing techniques not to over-smooth, causing significant deviations from the depicted lines on the equivalent PNG charts.

Please note that open and closed boundaries are used for encoding turbulence information – see section 1.3.4.

If call-out arrows are used to link areas of turbulence to boxed-numbers then appropriate algorithms should be employed to ensure that there can be no ambiguity with regard to the intended forecast conditions. It is recommended that, where possible, boxed-numbers are contained wholly within the relevant turbulence area, and if this is done there is no need for any call-out 'arrows' to be created. If this not possible, then the call-out arrow should be generated such that the arrowhead falls within the 'feature' with which it is associated. This should be possible to determine - even with 'open' areas - due to the convention of drawing open areas. The boxed-number should be positioned such that it does not overwrite any other information. It is permissible to have a boxed-number within another turbulence area so long as its call-out arrow unambiguously identifies the appropriate feature.

5.1 FEATURE HEADER

Contains the type of data to follow and the number of features in the list.

TURB	Type of feature
2	Number of turbulence areas in list

5.2 FEATURE DATA

1st row = heights of CAT base and top in meters, 2nd row = number of points in area. These are followed by two columns containing latitude and longitude data. A single number in the last row indicates the degree of turbulence (6=MOD, 7=SEVERE, 19=MOD OCNL SEVERE).

10363.2	12192.0	BASE and TOP of turbulence area (metres)
17		Number of points in turbulence area
44.5	-96.8	Latitude and longitude values
44.6	-94.2	
46.0	-89.1	
44.8	-75.8	
45.2	-63.5	
44.6	-57.2	
44.4	-50.0	
44.8	-34.3	
46.8	-32.8	
51.5	-38.9	
52.2	-47.1	
52.6	-59.4	
54.6	-69.0	
55.3	-84.3	
52.2	-91.6	
47.0	-97.7	
44.5	-96.8	
6		CLOSED area because the last point matches the first Degree of turbulence (see Section 11 - table 011030)

11887.2	13716.0	BASE and TOP of turbulence area (metres)
12		Number of points in turbulence area
72.2	-58.5	Latitude and longitude values
69.9	-59.8	
67.1	-49.8	
63.8	-35.3	
61.0	-25.3	
57.6	-16.0	
53.6	-7.1	
58.0	4.3	
62.1	3.9	
69.4	-11.6	
74.4	-39.0	
72.2	-58.5	
6		CLOSED area because the last point matches the first Degree of turbulence (see Section 11 - table 011030)

6 CLOUD REPRESENTATION

In accordance with Annex 3 and the PANS-MET, the CB cloud forms that are depicted the SWH forecasts (and therefore in the SWH BUFR) are the same as those included in SWM forecasts.

OCNL CB
FRQ CB

In addition, although a rare occurrence above FL250, any expectation of non-convective cloud with moderate and/or severe ice and or turbulence will also be depicted. Clearly, non-convective cloud with moderate and/or severe ice is much more commonly a SWM feature but SIGWX BUFR visualisation software should be capable of displaying such phenomena in the SWH forecasts.

CLOUD areas (see Figure 11) are shown on the charts as a scalloped area and an information-box, sometimes shown with an arrow if the box is not inside the area. If call-out arrows are used, then appropriate algorithms should be employed to ensure that there can be no ambiguity with regard to the intended forecast conditions. It is recommended that, where possible, information-boxes are contained wholly within the relevant cloud area, and if this is done there is no need for any call-out 'arrows' to be created. If this not possible, then the call-out arrow should generated such that the arrowhead falls within the 'feature' with which it is associated. This should be possible to determine - even with 'open' areas - due to the convention of drawing open areas. The information-box should be positioned such that it does not overwrite any other information. It is permissible to have an information-box within another cloud area so long as its call-out arrow unambiguously identifies the appropriate feature.

Open and closed cloud boundaries are encoded in BUFR – see section 1.3.4.

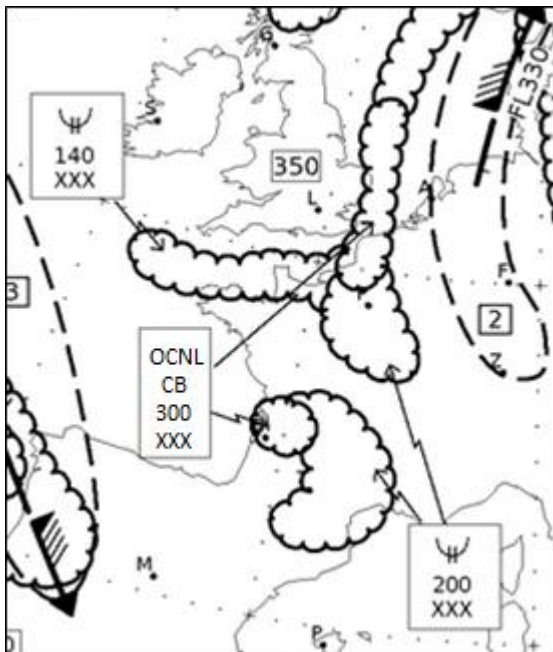


Figure 11 – CLOUD areas and data boxes

It is recommended that a cubic spline technique is employed to ensure that a continuous scalloped line is plotted between vertices.

Cloud areas are encoded with an orientation of the cloud area being to the left of the boundary when drawn in the order of points given. To replicate this orientation at the client side, ensure that cloud scallops point to the right when cloud areas are drawn in the order of points given.

6.1 FEATURE HEADER

Contains the type of data to follow and the number of features in the list.

CLOUD	Type of feature
2	Number of CLOUD areas in list

6.2 FEATURE DATA

1st row = heights of CLOUD base and top in meters, 2nd row = number of points in area. These rows are followed by two columns containing latitude and longitude data. The numbers in the last row indicate the distribution and type of the CLOUD.

-9999999.0	12496.8	BASE and TOP of CLOUD area (metres)
9		Number of points in CLOUD area
26.7	-84.7	Latitude and longitude values
24.2	-84.2	
19.0	-79.6	
19.6	-74.9	
23.0	-72.2	
28.2	-72.2	
31.7	-77.9	
28.6	-85.1	
26.7	-84.7	
9	9	CLOUD distribution (see Section 11 - table 020008)
		CLOUD type (see Section 11 - table 020012)

-9999999.0	11887.28	BASE and TOP of CLOUD area (metres)
8		Number of points in CLOUD area
28.2	-57.0	Latitude and longitude values
28.4	-49.2	
28.0	-41.4	
26.0	-30.7	
30.7	-25.0	
33.4	-33.1	
31.7	-52.6	
28.2	-57.0	
11	9	CLOUD distribution (see Section 11 - table 020008)
		CLOUD type (see Section 11 - table 020012)

7 FRONT REPRESENTATION, INCLUDING CONVERGENCE ZONES (E.G. ITCZ)

The FEATURE HEADER and FEATURE DATA elements of the following BUFR bulletins are no longer shown:

SWH frontal bulletins: JUFE00 EGRR and JUFE00 KKCI

SWM frontal bulletins: JUJE00 EGRR and JUJE00 KKCI.

8 TROP Representation

Tropopause (TROP) spot height labels are used on SIGWX charts (see 2).



Figure 12 – High, low and ‘spot’ value TROP boxes

8.1 FEATURE HEADER

Contains the type of data to follow and the number of features in the list.

TROP3

Type of feature
Number of types of TROP boxes in list

8.2 FEATURE DATA

1st row = type of tropopause box (e.g. low, high). 2nd row = number of trop boxes of this type, followed by three columns containing latitude, longitude and height data. Heights are in metres.

-99999994

57.678.773.645.4

-116.9-78.114.136.3

14020.814020.814020.814020.8

Type of TROP box (see Section 11 - table 008023)
Number of TROP boxes of this type
Latitude and longitude location and height value

31

55.0

30.0

11582.4

Type of TROP box (see Section 11 - table 008023)
Number of TROP boxes of this type
Latitude and longitude location and height value

21

31.8

-13.7

13716.0

Type of TROP box (see Section 11 - table 008023)
Number of TROP boxes of this type
Latitude and longitude location and height value

9 VOLCANOES, SANDSTORMS, TROPICAL CYCLONES AND RADIATION REPRESENTATION

Volcanoes, tropical cyclones and radiation events are all held in one file. The symbols on the charts are shown in Figure 13. The data for each feature is held in BUFR as shown below, though no details of *how* these are to be depicted is given. The convention outlined in ICAO Annex 3 should be followed. Information contained in this BUFR bulletin is equally applicable to SWM charts and SWH charts. Whilst sandstorms can be encoded within the BUFR, these are not currently included within the SIGWX data set.

Important Note: Guidance has been included under item 6 in section 3.1 of this document regarding the depiction of co-incident or partially overlapping features.



Figure 13 – Volcano, Tropical Cyclone (TC “FRED”, northern hemisphere orientation), Tropical Cyclone (TC “BOLOETSE”, southern hemisphere orientation) and Radiation symbols

Please note that the applicability of this data to SWM and SWH charts is reflected in the message header of the bulletin. The flight level boundaries span the base of a SWM chart (3050 m) to the top of an SWH chart (19200 m) – see below.

```

93          Originating centre.
2006 01 30 00 00 DATA Time - Year, month, day, hour, minute
2006 01 31 00 00 FORECAST Time - Year, month, day, hour, minute
3050          19200 Flight level boundaries (base and top)

```

9.1 FEATURE HEADER

There are 3 possible headers in this file, each indicating the type of data to follow and the number of features in the list.

```

STORM          Type of feature (covering Tropical Storms (TC) and Sandstorms)
1              Number of STORMS in list

VOLCANO        Type of feature
1              Number of VOLCANOES in list

RADIATION      Type of feature
1              Number of RADIATION incidents in list

```

9.2 FEATURE DATA

Each feature follows a different set of data as shown below.

STORM

```

FRED          Name
25.0          -78.0 Latitude and Longitude of storm
2              STORM type (see Section 11 - table 019001)

```

VOLCANO

```

ETNA          Name of volcano (if known) (-9999999 used if not known)
37.7          15.0 Latitude and longitude of volcano
2003          11      25      9      30
Eruption time (year, month, day, hour and minute;
the date and time of eruption are not routinely included in the
BUFR bulletins produced by the two WAFCs. This is because the
information is not normally available to the WAFC forecasters.) As
of Amendment 76 to ICAO Annex 3 (Applicable 14 November 2013) there
is no longer a requirement to provide the eruption time on
visualisations of SIGWX

```

RADIATION

```

SITENAME      Location of incident (if known)) (-9999999 used if not known)
53.2          -24.1 Latitude and longitude of incident
-9999999      -9999999 -9999999 -9999999 -9999999
Incident time (year, month, day, hour and minute;
Year and month are not used)

```

Note 1: The SIGWX BUFR encode software inserts a replication factor of 1 for each volcano. This replication factor is not explicitly displayed when the UK Met Office decoder is used.

10 MEDIUM LEVEL SIGWX (SWM) DATA

10.1 GENERAL

WAFS SWM data is valid between FL100 and FL450. Data is provided for four regions of the world (EURO, MEA, ASIA SOUTH and NAT) The areas for which each WAFC is formally responsible for is shown in Table 2.

SWM Area	Responsible WAFC	WMO Header
EURO	London	PGDE14 EGRR
MEA	London	PGCE14 EGRR
ASIA SOUTH	London	PGZE14 EGRR
NAT	Washington	PGNE14 KKCI

Table 2 – SWM forecast areas, and corresponding headers of PNG charts

It is required that the visualisation software clearly depicts, when necessary, the limited coverage areas of this data to ensure that users do not try and produce SWM charts from BUFR data over user defined regions that do not contain forecast data. It is strongly recommended that the software indicates, by way of diagonal hatching lines, all geographical areas that are not covered by forecast data. The areas for which data is included are given over in Table 3.

NAT

Northern Polar Stereographic Projection

BLHC_LATITUDE	=	+17.2
BLHC_LONGITUDE	=	-54.1
TRHC_LATITUDE	=	+50.7
TRHC_LONGITUDE	=	+60.3
VERTICAL_LONGITUDE	=	-20.0

MEA

Mercator Projection

BLHC_LATITUDE	=	+10.0
BLHC_LONGITUDE	=	+17.0
TRHC_LATITUDE	=	+44.0
TRHC_LONGITUDE	=	+70.0

EURO

Northern Polar Stereographic Projection

BLHC_LATITUDE	=	+21.4
BLHC_LONGITUDE	=	-21.6
TRHC_LATITUDE	=	+58.7
TRHC_LONGITUDE	=	+68.4
VERTICAL_LONGITUDE	=	+11.1

ASIA SOUTH

Mercator Projection

BLHC_LATITUDE	=	+0.0
BLHC_LONGITUDE	=	+53.0
TRHC_LATITUDE	=	+36.0
TRHC_LONGITUDE	=	+108.0

Table 3 – SWM forecast areas as defined by bottom left hand corner (BLCH) latitude and longitude, top right hand corner (TRHC) latitude and longitude, and projection

where BLHC=bottom left hand corner, TLHC=top left hand corner, TRHC=top right hand corner, and BRHC=bottom right hand corner. Negative latitude values are located in the southern hemisphere, and negative longitude values in the western hemisphere.

All of these four areas are used on rectangular displays. Appropriate cartographic routines will need to be employed to ensure that these defined areas remain valid when displayed on different map projections, e.g. when data for the area ASIA SOUTH is displayed on a Northern Polar Stereographic projection.

The chart areas for which data is produced at medium level will be described within the SWM bulletins.

All of the information that is required for SWM charts is contained in the bulletins as listed below in Table 4:-

BUFR FEATURES	COMMON NAME	WMO HEADER used by WAFC London	WMO HEADER used by WAFC Washington
Tropical Cyclone, Sandstorms & Volcanoes	V_T_S	JUVE00 EGRR	JUVE00 KKCI
SWM Tropopause height	M-TROP	JUOE00 EGRR	JUOE00 KKCI
SWM jet-streams	M-JETS	JUTE00 EGRR	JUTE00 KKCI
SWM fronts	M-FRONTs	JUJE00 EGRR	JUJE00 KKCI
SWM cloud, in-cloud icing and turbulence	M-CLOUD	JUNE00 EGRR	JUNE00 KKCI
SWM Clear Air Turbulence (C.A.T.)	M-CAT	JUME00 EGRR	JUME00 KKCI

Table 4 – Bulletins containing SIGWX data applicable to SWM charts

Important Note: The bulletin that contains tropical cyclone, sandstorm and volcano information (JUVE00 EGRR and JUVE00 KKCI) is the same bulletin used for producing SWH charts. This bulletin is equally applicable to SWM and SWH charts.

10.2 SWM TURBULENCE

All turbulence information that is applicable to SWM is contained in the bulletin JUVE00 EGRR/KKCI. Section 5 of this document provides an example of how this information is presented within a turbulence bulletin applicable to SWH. This format is identical to the format used for SWH turbulence with the only exception that the FEATURE HEADER is modified to:

MTURB Type of feature [Medium Turbulence]

10.3 SWM VOLCANOES, SANDSTORMS, TROPICAL CYCLONES and RADIATION

All information relating to these types of features is contained in the same bulletin that is used to construct SWH charts (JUVE00 EGRR and JUVE00 KKCI). See section 9 of this document to review the format of how this information is presented. Please note that *all* of the features contained within these files are applicable to the SWM charts, i.e. the phenomena are not height dependent.

10.4 SWM TROPOPAUSE (TROP) HEIGHT

See section 8 of this document to review how tropopause height information is presented. Tropopause heights applicable to medium level charts are contained in the SWM tropopause height bulletin (JUOE00 EGRR and JUOE00 KKCI). This information should be plotted on the SWM charts using the same formats applied to the SWH tropopause heights. The only difference between the SWM and SWH TROP height bulletins is the FEATURE HEADER. The FEATURE HEADER assigned to the SWM TROP height bulletin is as follows:

MTROP Type of feature [Medium level Tropopause height]

10.5 SWM JET STREAMS

See section 4 of this document to review how jet stream information is presented. Jet streams applicable to medium level charts are contained in the SWM jet stream bulletin (JUTE00 EGRR and JUTE00 KKCI). This information should be plotted on the SWM charts using the same formats applied to the SWH jet-streams.

MJET

Type of feature (Medium level jet-stream)

10.6 SWM Fronts

The FEATURE HEADER and FEATURE DATA elements of the following BUFR bulletins are no longer shown:

SWH frontal bulletins: JUFE00 EGRR and JUFE00 KKCI

SWM frontal bulletins: JUJE00 EGRR and JUJE00 KKCI.

10.7 SWM Cloud and Icing

In accordance with Annex 3, the CB cloud forms that are depicted the SWM forecasts (and therefore in the SWM BUFR) are:

OCNL CB

FRQ CB

Any areas with moderate and/or severe ice will also be depicted.

On SWM charts, reference is made only to the degree of CB activity or in-cloud icing. See

Figure below for an example.

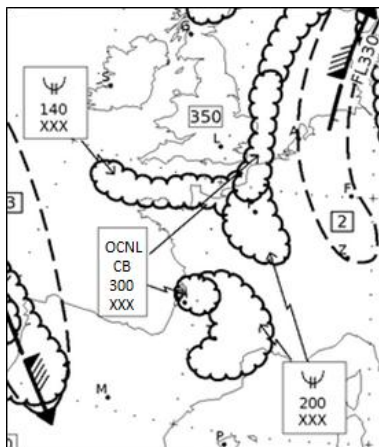


Figure 14 – Example Cloud and icing depiction

10.7.1 FEATURE HEADER

Contains the type of data to follow and the number of features in the list.

MCLLOUD

Type of feature

10.7.2 FEATURE DATA

1st row = number of points in area. These rows are followed by two columns containing latitude and longitude data. The number in the next row indicates information about the non-CB cloud and this entry will always be zero. This is followed by information about the degree of in-cloud icing. Finally, information is provided about CB activity. If in-cloud icing and/or CB activity is not present, then this is specified in the message (=0), and subsequent descriptive information about this element is not included.

Note: the specification below includes references to turbulence, which is no longer included in the SIGWX data set.

8			Number of points in CLOUD area
28.2	-57.0		Latitude and longitude values
28.4	-49.2		
28.0	-41.4		
26.0	-30.7		
30.7	-25.0		
33.4	-33.1		
31.7	-52.6		
28.2	-57.0		
0			Number of NON-CB CLOUD distributions (see section 11 - descriptor 031001). Will always be 0 and there is no following row listing CLOUD distribution.
0			Number of NON-CB CLOUD types (See Section 11 - descriptor 031001). Will always be 0 and there is no following row listing types because there are no NON-CB TYPES.
1			TURBULENCE section (=1 if turbulence, 0 if not - in which case next 2 rows are excluded)
-9999999	7315		BASE and TOP of TURBULENCE area (metres)
2			DEGREE of TURBULENCE (See Section 11 - table 011030)
1			ICING section (=1 if icing, 0 if not - in which case next 2 rows are excluded)
3353	6706		BASE and TOP of ICING area (metres)
5			DEGREE of ICING (See Section 11 - table 020041)
1			Optional CB section (=1 if CB, 0 if not - in which case next 3 rows are excluded)
-9999999	10668		BASE and TOP of CB CLOUD (metres)
9			CLOUD distribution (see Section 11 - table 020008)
9			CLOUD type (=CB) (See Section 11 - table 020012)

11 RELEVANT BUFR TABLES

In the lists on the following pages, elements that are commonly used in SWM and/or SWH data are highlighted in **red**. Other items are never used or only infrequently.

001031 ORIGINATING/GENERATING CENTRE

1	AMMC	MELBOURNE	
2		MELBOURNE	
4	RUMS	MOSCOW	
5		MOSCOW	
7	KWBC	WASHINGTON	WAFB
8	KWXX	US W/SERVICE	(NWSTG)
10	HECA	CAIRO	RMC
11		CAIRO	RMC
12	GOOY	DAKAR	RMC
13		DAKAR	RMC
14	HKNA	NAIROBI	RMC
15		NAIROBI	RMC
16	FMMD	ANTANANARIVO	(not in Manual)
17		ANTANANARIVO	(not in Manual)
18	DTTV	TUNIS-CASABLANCA	
19		TUNIS-CASABLANCA	
20	SPLP	LAS PALMAS	
21	DAMM	ALGIERS	
22	LPLG	LAGOS	RMS (not in Manual)
23		LAGOS	RMS (not in Manual)
24	FAPR	PRETORIA	
25	FME	LA REUNION	
26	RUKH	KHABAROVSK	
27		KHABAROVSK	
28	DEMS	NEW DELHI	
29		NEW DELHI	

```

30 UNNN NOVOSIBIRSK
31     NOVOSIBIRSK
32 RUTK TASHKENT
33     JEDDAH
34 RJTD TOKYO
35     TOKYO RMC
36 VTBB BANGKOK
37 MNUB ULAN BATOR
38 BABJ BEIJING
39     BEIJING
40 RKSL SEOUL
41 SABM BUENOS AIRES
42     BUENOS AIRES
43 SBBR BRASILIA
44     BRASILIA
45 SCSC SANTIAGO
46     BRAZILIAN SA - INPE
51 KMIA MIAMI
52     MIAMI HURRICANE CENTRE
53 CWAQ MONTREAL RMC
54     MONTREAL RMC
55 KSFO SANFRANCISCO
57 KARS US AIR FORCE (ARGOS COMMUNICATIONS CENTRE, LANDOVER, MD)
58 KMRY US NAVY, MONTEREY
59 KBOU BOULDER (NOAA FORECAST LAB)
60     NCAR
61     Service ARGOS (Landover)
62     US Naval Oceanographic Office
64 PHNL HONOLULU
65 ADRM DARWIN
66     DARWIN
67 AMMC MELBOURNE
69 NZKL WELLINGTON
70     WELLINGTON
71 NFFN NADI (FIJI)
74 EGRR UK MET OFFICE
75     UK MET OFFICE
76     MOSCOW
78 EDZW OFFENBACH
79     OFFENBACH
80 LIIB ROME RMC
81     ROME RMC
82 BGSF SONDRE/STROMFJORD GREENLAND ??? (Manual says Norrkoping)
83 ESWI NORRKOPING RMC
84     Toulouse
85 LFPW TOULOUSE
86 EFKL HELSINKI
87 LYMB BELGRADE
88 ENMI OSLO
89 LKPR PRAGUE
90 LCRO EPISKOPI
91 LTAA ANKARA
92 EDDZ FRANKFURT/MAIN
93 EGRR LONDON WAF
94 EKCH COPENHAGEN
95 LERT ROTA
96 LGAT ATHENS
97 EESA ESA
98 ECMF ECMWF
99 EHDB DE BILT
110 VHHH HONG KONG
160     NOAA/NESDIS
210     FRASCATI (ESA/ESRIN)
211 LFRO LANNION
212 LPPT LISBOA
213 BIRK REYKJAVIK
214     MADRID
215 LSZH ZURICH
216     ARGOS (Toulouse)
217 LZIB BRATISLAVA
218 LHBP BUDAPEST
219 LJLJ LJUBLJANA
220 EPWA WARSAW
221 LDZA ZAGREB
254     EUMETSAT

```

008001 VERTICAL SOUNDING SIGNIFICANCE (7-BIT FLAG TABLE)

- 1 SURFACE
- 2 STANDARD
- 3 TROPOPAUSE
- 4 MAX WIND
- 5 SIG TEMP
- 6 SIG WIND

008005 METEOROLOGICAL ATTRIBUTE SIGNIFICANCE

- 0 Automatic
- 1 STORM CENTRE
- 2 STORM EDGE OR OUTER LIMIT
- 3 MAXIMUM WIND

008007 DIMENSIONAL SIGNIFICANCE

- 0 POINT
- 1 LINE
- 2 AREA
- 3 VOLUME

008021 TIME SIGNIFICANCE

- 0
- 1 TIME SERIES
- 2 TIME AVERAGE
- 3 ACCUMULATED
- 4 FORECAST
- 5 F/C TIME SER
- 6 F/C TIME AVE
- 7 F/C ACCUM
- 8 ENSEMBLE MEAN
- 9 9-15 ARE AS 1-7 FOR ENSEMBLE MEAN
- 10
- 11
- 12
- 13
- 14
- 15
- 16 ANALYSED
- 17 START OF PHENOMENON
- 18 SONDE LAUNCH
- 19 ORBIT START
- 20 ORBIT END
- 21 ASC NODE
- 22 WIND SHIFT
- 23 Monitoring period
- 24 Agreed limit for report reception
- 25 Nominal reporting time
- 26 Last known position time
- 27 FIRST GUESS
- 28 START OF SCAN
- 29 END OF SCAN

008040 CBS Flight Level Significance

- 0 High resolution data sample
- 1 Within 20hPa of surface
- 2 <10hPa
- 3 Base pressure level for stability index
- 4 Begin T,ht doubtful
- 5 Begin missing data (all elements)
- 6 Begin RH missing
- 7 Begin T missing
- 8 Highest level reached before balloon descent
- 9 End T,ht doubtful
- 10 End missing data (all elements)
- 11 End RH missing
- 12 End T missing
- 13 OC crossing for RADAT
- 14 Std pressure
- 15 Operator added level
- 16 Operator deleted level
- 17 Balloon reascended beyond previous highest level
- 18 Sig RH
- 19 No more RH
- 20 Surface
- 21 Sig T

22 Mandatory T
 23 Flight termination
 24 Tropopause
 25 Aircraft report
 26 Interpolated level
 27 Mandatory wind
 28 Sig wind
 29 Max wind
 30 Increm wind
 31 Increm height
 32 Wind termination
 33 100-110hPa
 40 Inversion
 41 Sig RH (NCDC criteria)
 42 Sig T (NCDC)
 60 80kt FL above jet (flight level of 80-knot isotach)
 61 80kt FL below jet (flight level of 80-knot isotach)

011030 - EXTENDED DEGREE OF TURBULENCE

Code figure
 0 Nil)
 1 Light | in cloud
 2 Moderate |
 3 Severe)
 4 Nil)
 5 Light | in clear air
 6 Moderate |
 7 Severe)
 8 Nil)
 9 Light | cloud/clear not specified
 10 Moderate |
 11 Severe)
 12 Extreme, in clear air
 13 Extreme, in cloud
 14 Extreme, cloud/clear air not specified
 15 Light ISOL MOD
 16 Light OCNL MOD
 17 Light FRQ MOD
 18 MOD ISOL SEV
 19 MOD OCNL SEV
 20 MOD FRQ SEV
 21 SEV ISOL EXTREME
 22 SEV OCNL EXTREME
 23 SEV FRQ EXTREME
 24-62 Reserved
 63 Missing value

020008 CLOUD DISTRIBUTION FOR AVIATION

0 SKY CLEAR
 1 FEW
 2 SCATTERED
 3 BROKEN
 4 OVERCAST
 5
 6 SCT/BKN scattered/broken
 7 BKN/OVC broken/overcast
 8 ISOLATED
 9 ISOL/EMBED isolated/embedded
 10 OCCASIONAL
 11 OCNL/EMBED occasional/embedded
 12 FREQUENT
 13 DENSE
 14 LAYERS

020012 CLOUD TYPE

0 CI
 1 CC
 2 CS
 3 AC
 4 AS
 5 NS
 6 SC
 7 ST
 8 CU
 9 CB
 ...
 40 CH

020090 SPECIAL CLOUDS

0
1 NACREOUS
2 NOCTILUCENT
3 WATERFALL
4 FIRE CLOUDS
5 VOLCANIC

023002 ACTIVITY OR FACILITY INVOLVED IN INCIDENT

0
1 GROUND REACTOR
2 SEA REACTOR
3 SPACE REACTOR
4 NUC.FUEL FAC
5 RAD.WASTE
6 WASTE TRANSP
7 WASTE STORAG
8 MANUF.ISOTOP
9 ISOTOPE USE
10 ISO STORAGE
11 ISO DISPOSAL
12 ISO TRANSPRT
13 ISO POWERGEN

031001 is described as DELAYED DESCRIPTOR REPLICATION FACTOR

This is a numeric value indicating how many times a feature is replicated and is NOT a BUFR table.

008011 METEOROLOGICAL FEATURE

0 QSTAT FRONT
1 QFRONT ALOFT
2 WARM FRONT
3 WFRONTALOFT
4 COLD FRONT
5 CFRONT ALOFT
6 OCCLUSION
7 INSTAB LINE
8 TROPIC FRONT (ITCZ)
9 CONVERG LINE
10 JET STREAM
11 CLOUD CLEAR
12 CLOUD
13 TURBULENCE
14 STORM
15 AIRFRANE ICING
16 PHENOMENON
17 VOLCANO
18 ATMOSPHERICS
19
20 SPECIAL CLOUDS

008023 SIGNIFICANCE OF FOLLOWING VALUE (FIRST ORDER STATISTICS)

0
1
2 MAXIMUM
3 MINIMUM
4 MEAN
5 MEDIAN
6 MODAL
7 MEAN ABS ERROR
8
9 STD DEV (N-1) BEST ESTIMATE
10 STD DEV (N)
11 HARMONIC MEAN
12 RMS VECTOR ERROR
13 ROOT MEAN SQUARE
14
15
16
17

18
19
20
21
22
23
24
25
26
27
28
29
30
31
32 VECTOR MEAN

019001 TYPE OF SYNOPTIC FEATURE

0 DEPRESSION
1 TROP DEPRESS
2 TROPIC STORM
3 SEVERE STORM
4 TYPHOON
5
6
7
8
9
10 DUST/SANDSTORM

020041 AIRFRAME ICING

0 NONE
1 LIGHT
2 LIGHT (CLOUD
3 LIGHT (PRECP
4 MOD
5 MOD (CLOUD)
6 MOD (PRECIP)
7 SEV
8 SEV (CLOUD)
9 SEV (PRECIP)
10 TRACE
11 TRACE (CLOUD)
12 TRACE (PRECIPITATION)

12 CONTACT DETAILS

WAFC London can provide a consultancy service to assist individual clients or States in the construction of WAFS visualisation software that is fully compliant with ICAO Annex 3 and the software criteria that has been constructed by the ICAO SADIS Operations Group. Please contact WAFC London via the contact details below for further information.

WAFC London

Karen Shorey
SADIS Manager and International Aviation Analyst
Met Office, Fitzroy Road, Exeter, Devon, EX1 3PB, United Kingdom
E-mail: SADISmanager@metoffice.gov.uk

WAFC Washington


Joshua Scheck
Chief, Operations Branch
Aviation Weather Center, 7220 NW 101st Terrace, Room 101, Kansas City, Missouri 64153-2371, United States
Email: joshua.scheck@noaa.gov

ANNEX 1 – SYMBOLS FOR SIGNIFICANT WEATHER

(Extract from Appendix 1 to ICAO Annex 3, Eighteenth Edition, applicable November 2013)

IMPORTANT NOTE: The symbols used on the WAFS SIGWX charts are a subset of the symbols in Appendix 2 to ICAO Annex 3.

	Tropical cyclone
	Moderate turbulence
	Severe turbulence
	Moderate aircraft icing
	Severe aircraft icing
	Radioactive materials in the atmosphere**
	Volcanic eruption***
	Tropopause high
	Tropopause low
	Tropopause level
	Position, speed and level of maximum wind

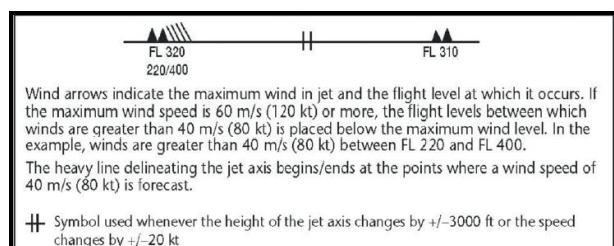

- * In-flight documentation for flights operating up to FL 100. This symbol refers to "squall line".
 - ** The following information should be included in a separate text box on the chart: radioactive materials in the atmosphere symbol; latitude/longitude of release site; and (if known) the name of the site of the radioactive source. In addition, the legend of SIGWX charts on which a release of radiation is indicated should contain "CHECK SIGMET AND NOTAM FOR RDOACT CLD". The centre of the radioactive materials in the atmosphere symbol should be placed on significant weather charts at the latitude/longitude site of the radioactive source.
 - *** The following information should be included in a separate text box on the chart: volcanic eruption symbol; the name of the volcano (if known); and the latitude/longitude of the eruption.
- In addition, the legend of SIGWX charts should indicate "CHECK SIGMET, ADVISORIES FOR TC AND VA, AND ASHTAM AND NOTAM FOR VA". The dot on the base of the volcanic eruption symbol should be placed on significant weather charts at the latitude/longitude site of the volcanic event.