



International Civil Aviation Organization

# **ASBU Methodology**


## **Summary of Block 1 Module**

# Outline

- Block understanding
- Block Maturity cycle
- Block 1 perspective
- Block 1 Modules
- Block 1 implementation




# Block 1

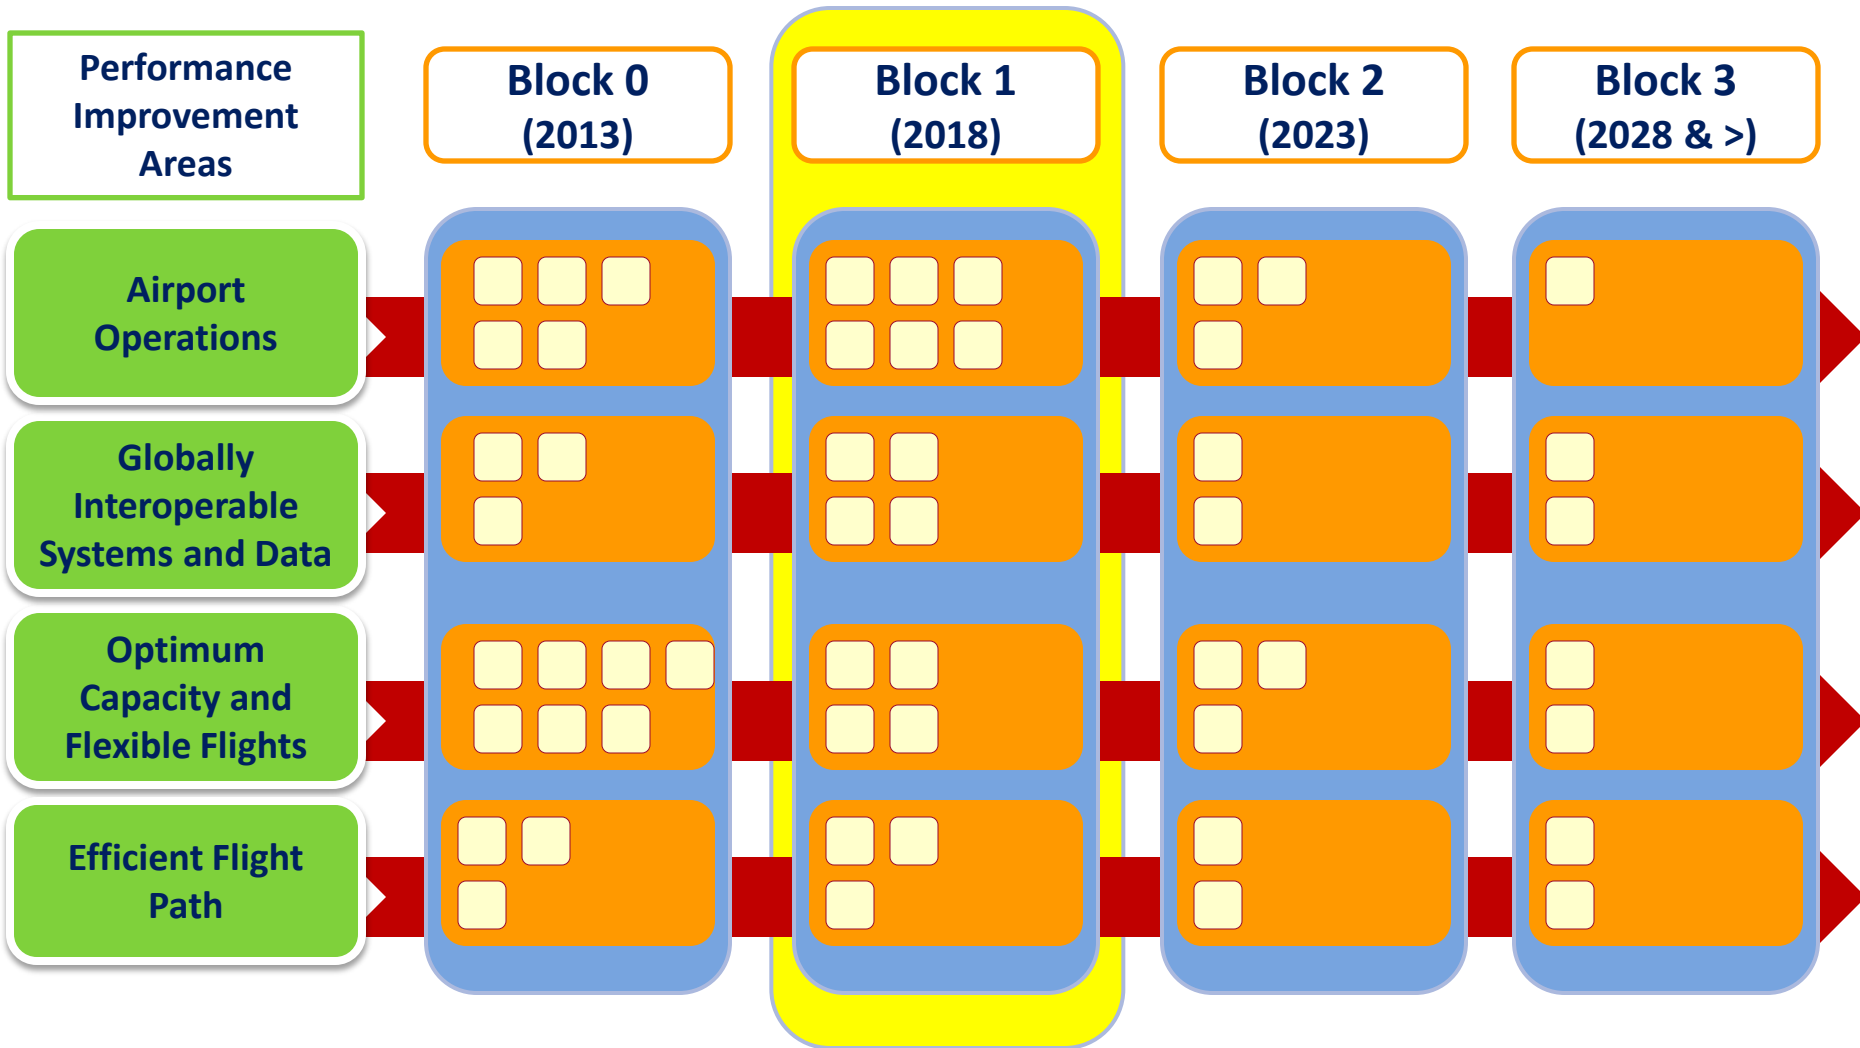

- 4 Main Performance improvement areas
  - Airport Operations (6 modules)
  - Globally interoperable systems & data (4 modules)
  - Optimum capacity & flexible flights (4 modules)
  - Efficient flight path (3 modules)
- Block 1 will serve as the enabler and foundation for the envisioned future aviation systems.

# Block Maturity Lifecycle

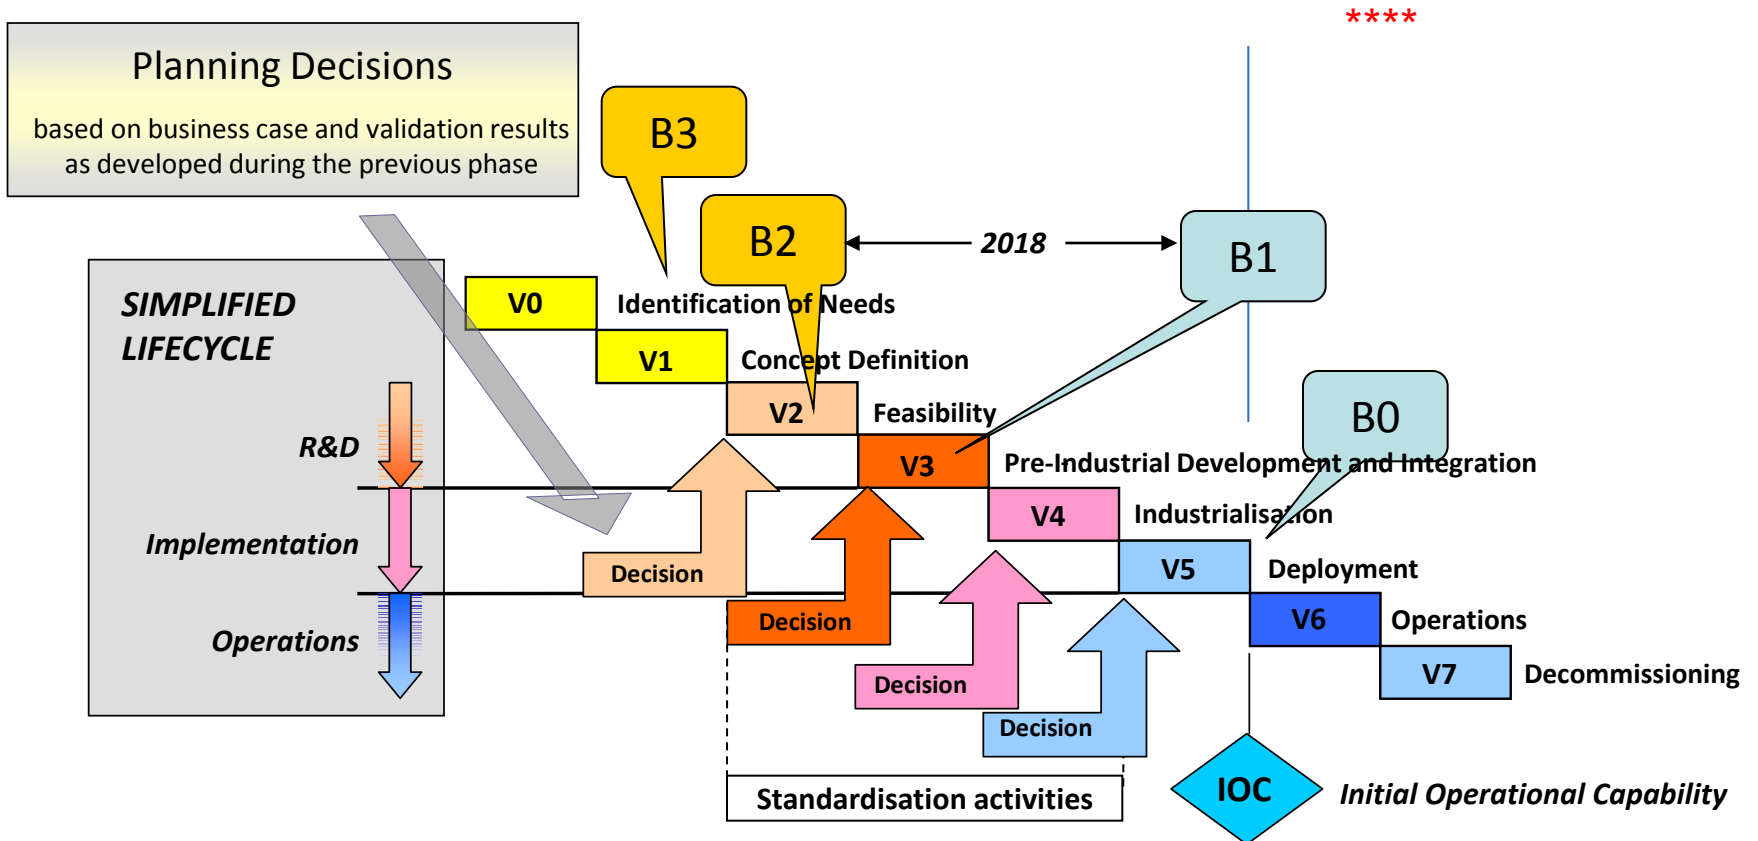


Block 1 will see critical ANSP capabilities synchronized.

# Block 1 in Perspective

## Performance Improvement Areas

- Airport Operations**
- Globally Interoperable Systems and Data**
- Optimum Capacity and Flexible Flights**
- Efficient Flight Path**

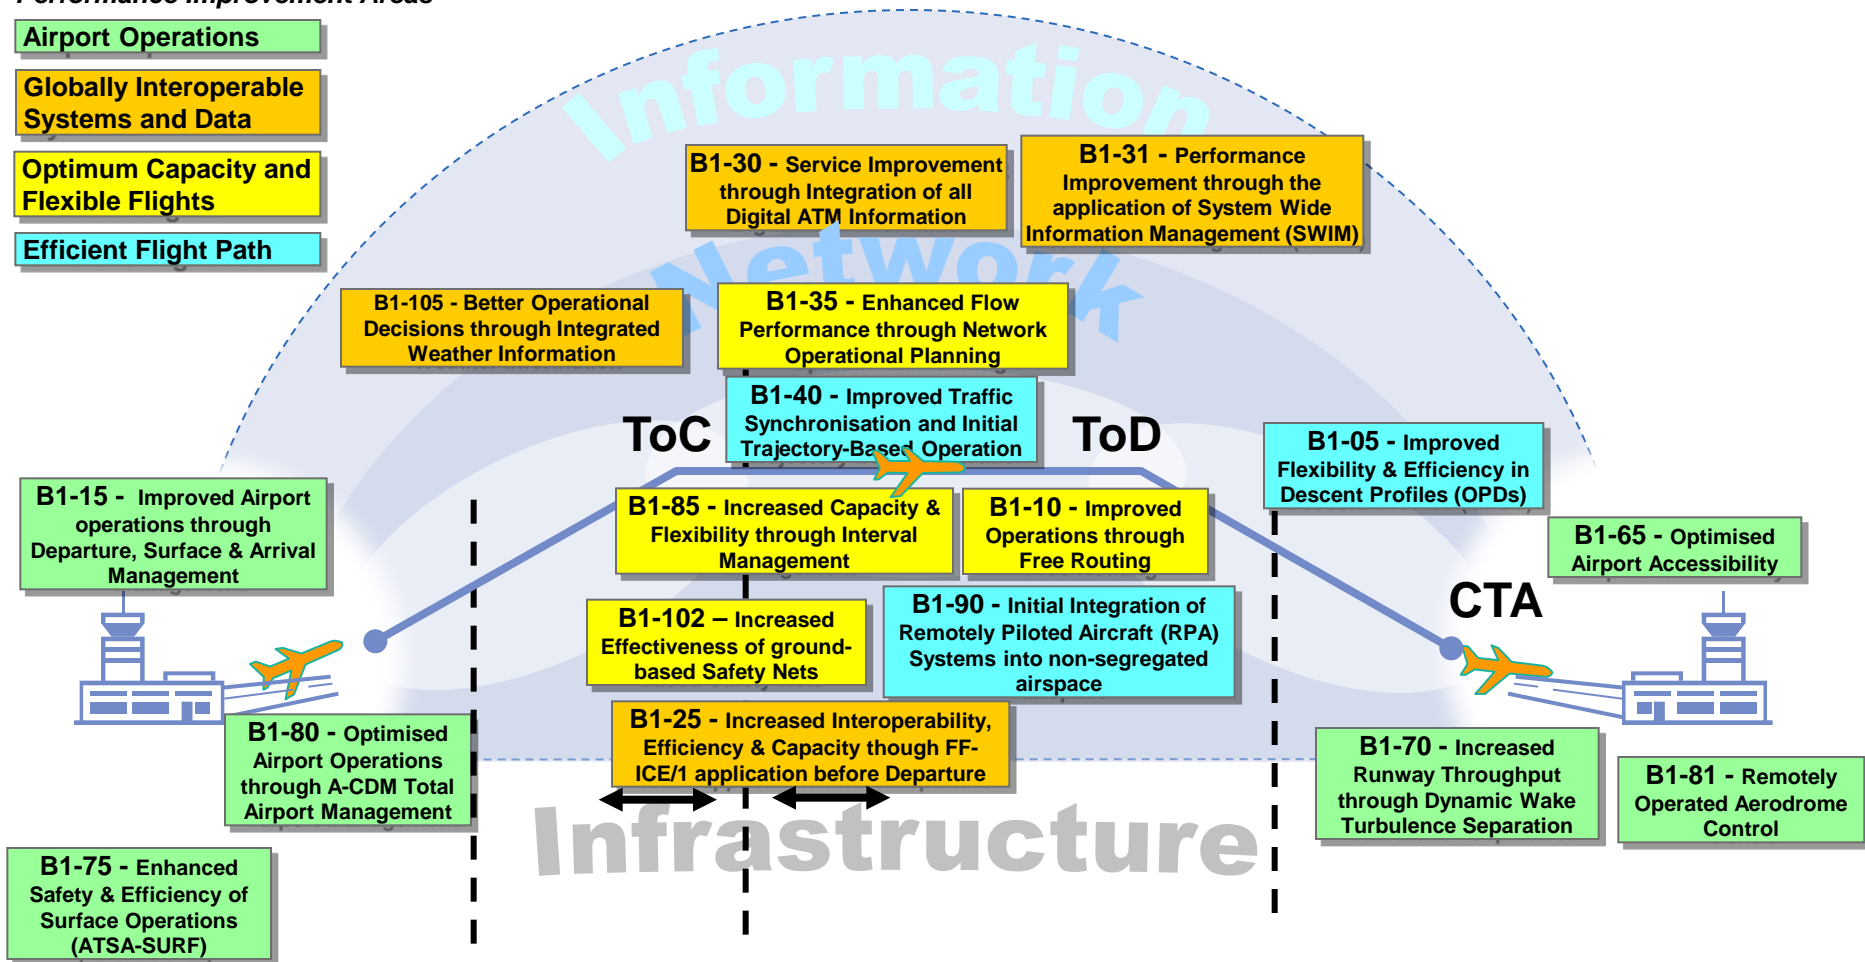


# Improved Airport operations through Departure, Surface and Arrival Management



## B1-15 Improved Airport operations through Departure, Surface and Arrival Management

|                                     |  |
|-------------------------------------|--|
| <b>Summary</b>                      | This module includes a brief description of integrated surface management and departure sequencing. The module also summarizes the benefits of departure sequencing and its integration with surface management.   |
| <b>Main Performance Impact</b>      | KPA-04 – Efficiency; KPA-02 – Capacity; KPA-09 – Predictability; KPA-06 - Flexibility  |
| <b>Domain / Flight Phases</b>       | Aerodrome and Terminal   |
| <b>Applicability Considerations</b> | <p>Runways and Terminal Maneuvering Area in major hubs and metropolitan areas will be most in need of these improvements.</p> <p>Complexity in implementation of this module depends on several factors. Some locations might have to confront environmental and operational challenges that will increase the complexity of development and implementation of technology and procedures to realize this module. PBN routes need to be in place.</p> |



# B1-70 Increased Runway Throughput through Dynamic Wake Vortex Separation



## B1-70 - Increased Runway Throughput through Dynamic Wake Vortex Separation

|                                     |  |
|-------------------------------------|--|
| <b>Summary</b>                      | This module addresses Improved throughput on departure and arrival runways through the dynamic management of wake turbulence separation minima based on the real-time identification of wake turbulence hazards. |
| <b>Main Performance Impact</b>      | KPA-02 Capacity , KPA-04 Efficiency, KPA-05 Environment, KPA-06 Flexibility  |
| <b>Domain / Flight Phases</b>       | Aerodrome  |
| <b>Applicability Considerations</b> | Least Complex – Implementation of re-categorized wake turbulence is mainly procedural. No changes to automation systems are needed.  |

B1-70

B2-70



# B1-70 Increased Runway Throughput through Dynamic Wake Vortex Separation




- Wake vortex separation can be reduced under certain crosswind conditions.

This upgrade requires:

- Tactical Wind Prediction and Monitor function (for next departure)
- Strategic Weather function (for planning horizon)
- Stability of operation to ensure usability/reliability

## Mid Term (Block I)

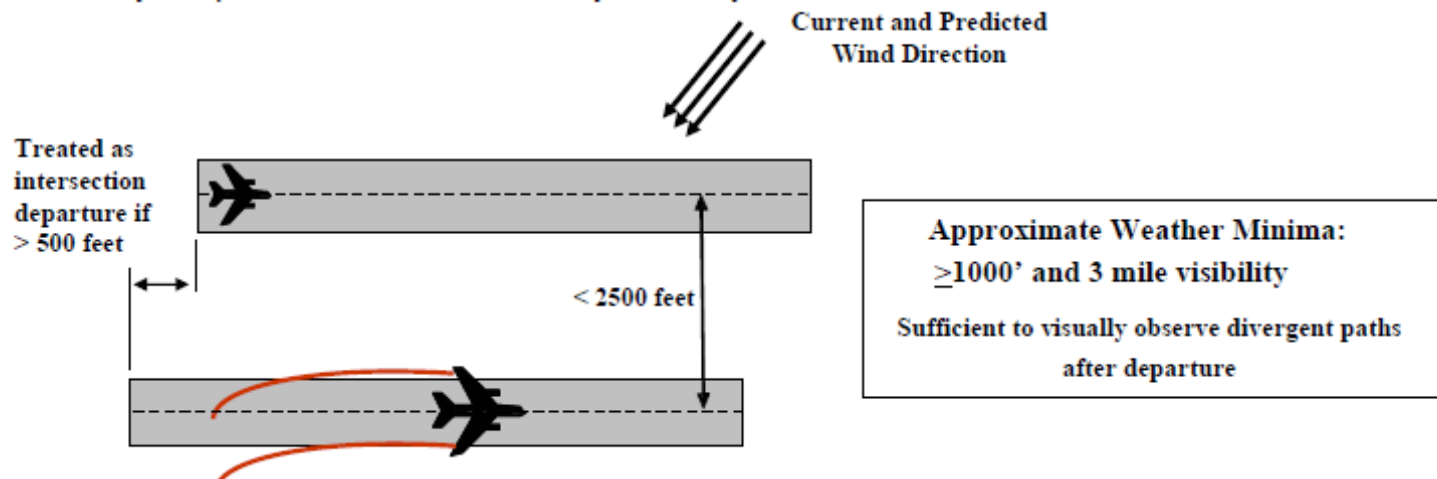


# B1-30 Service Improvement through Integration of all Digital ATM Information




## B1-30 - Service Improvement through Integration of all Digital ATM Information

|                                     |  |
|-------------------------------------|--|
| <b>Summary</b>                      | Implementation of the ATM Information Reference Model (AIRM) integrating all ATM information using UML and enabling XML data representations and data exchange based on internet protocols. Second step of implementation of digital IM, with the WXXM for meteorological information. |
| <b>Main Performance Impact</b>      | KPA-01 Access & Equity; KPA-03 Cost-Effectiveness; KPA-10 Safety   |
| <b>Domain / Flight Phases</b>       | All Phases of Flight   |
| <b>Applicability Considerations</b> | Applicable at State level, with increased benefits as more States participate  |

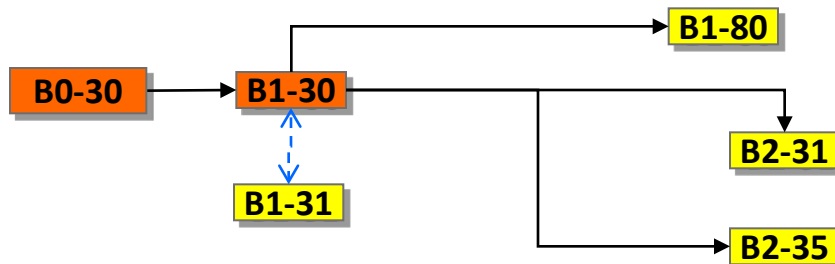

## B1-105 - Better Operational Decisions through Integrated Weather Information

|                                     |  |
|-------------------------------------|--|
| <b>Summary</b>                      | <p>The primary goal of this module is to enable the reliable identification of applicable air traffic management (ATM) solutions when weather phenomena are impacting, or forecast to impact, aerodromes or airspace. In order to achieve this goal, full ATM-Weather Integration is necessary. ATM-Weather Integration means that weather information is included in the logic of a decision process or aid such that the impact of the weather constraint is automatically calculated and taken into account when the decision is made or recommended.</p> |
| <b>Main Performance Impact</b>      | <p>KPA-02 Capacity, KPA-04 Efficiency, KPA-09 Predictability, KPA-10 Safety</p>  |
| <b>Domain / Flight Phases</b>       | <p>All flight phases.</p>  |
| <b>Applicability Considerations</b> | <p>Applicable to traffic flow planning, and to all aircraft operations in all domains and flight phases, regardless of level of aircraft equipage. Benefits accrue and/or costs are avoided as processes and Decision Support Tools (DSTs) employing ATM-Weather Integration concepts and techniques are adopted.</p>  |




# B1-5 - Improved Flexibility & Efficiency in Descent Profiles (OPDs)



## B1-05 - Improved Flexibility & Efficiency in Descent Profiles (OPDs)

|                                     |   |
|-------------------------------------|---|
| <b>Summary</b>                      | <p>This module provides the baseline for using Required Navigation Performance (RNP) with Vertical Containment. Vertical RNP is the requirement on vertical system accuracy at the 99.7% probability level. It indicates the normal operating error characteristics of a navigation system. The system is designed to enhance vertical flight path precision during descent, arrival, and while in the non-precision environment and enables aircraft to fly an approach procedure not reliant on ground based equipment for vertical guidance.</p> |
| <b>Main Performance Impact</b>      | KPA-04 Efficiency   |
| <b>Domain / Flight Phases</b>       | Descent, Arrival, Flight in Terminal Area   |
| <b>Applicability Considerations</b> | <p>The baseline for this block is Improved Flight Descent Profile enabled by Block B0-5. This block is a component of Trajectory-Based Operations (TBO).</p>  |



# Challenges - How to Get There?

- Budget considerations are greater for Block 1 since these modules do involve technology insertion in either ground/air or both.
- Block 1 has a strong dependency on moving to network based communications for aviation.
- There are regional synchronization issues of equipage and capabilities to achieve much of Block 1. This is essential to the successful implementation to the future Blocks.
  - Global standards can alleviate such risks and ensure interoperability between regional ANSPs. Global standards also offers stakeholders a common rubric.

# ICAO

Uniting Aviation on

Safety | Security | Environment

