



International Civil Aviation Organization

CAR/SAM Regional Planning and Implementation Group (GREPECAS)

Sixth Meeting of the Air Traffic Management / Communications, Navigation and Surveillance Subgroup (ATM/CNS/SG/6) - ATM Committee

Boca Chica, Dominican Republic, 30 June-4 July 2008

ATM/COMM/6 - WP/12

09/06/08

Agenda Item 4: Issues Related to the Organization of Future Work of GREPECAS ATM Matters

4.2 Review the Future Work Plan of the ATM Committee

ICAO STATE LETTER: AMENDMENTS TO THE ICAO FLIGHT PLAN

(Presented by the Secretariat)

SUMMARY

This paper presents a State Letter containing a proposal for a comprehensive amendment of the flight plan provisions of the PANS-ATM. Intended date for implementation on 15 November 2012.

This paper relates to:

Strategic Objectives:

A: Safety – Enhance global civil aviation safety

D: Efficiency – Enhance the efficiency of aviation operations

Global Plan Initiatives:

GPI/5: performance-based navigation

GPI/9: Situational awareness

GPI/17: implementation of data link applications

1. Introduction

1.1 In 2003, the Air Navigation Commission (ANC) authorized the establishment of the Flight Plan Study Group (FPLSG) to develop a new proposal for amendment to the ICAO flight plan provisions contained in the *Procedures for Air Navigation Services - Air Traffic Management* (PANS-ATM, Doc 4444).

1.2 The ANC, at the fourth and fifth meetings of its 175th Session on 1 and 3 May 2007, considered a proposal to amend the flight plan provisions. On 25 May 2007, the Secretary General sent to Contracting States and appropriate International Organizations State Letter AN 1312.5-07/35, included in the **Appendix A** to this Working Paper, with the proposed amendments.

1.3 During the first and second meeting of the 177th session of the ANC held on January 2008, the Commission approved the amendment to PANS-ATM (Doc 4444) related to Flight Plan included in the **Appendix B** to this Working Paper, with intended date for implementation on 15 November 2012.

2. Discussion

2.1 The amendment provides new information of the ICAO model flight plan form and associated operational practices to meet future needs of aircraft with advanced capabilities and the evolving requirements of automated air traffic management (ATM) systems, while taking into account compatibility with existing systems, human factors, training, cost and transition aspects.

2.2 The proposal for amendment also addresses recent developments in ATM matters, for example reduced vertical separation minimum (RVSM) and performance based navigation (PBN), while at the same time maintaining a high degree of commonality with the existing flight plan format.

2.3 During the preliminary review the Commission noted in particular that the attached amendment would be an interim step towards a future, completely revamped system that would satisfy the information management requirements that are prerequisite to the realization of the Global ATM Operational Concept.

3. Action by the Meeting

3.1 The Meeting is invited to:

- a) take note of the information of this Working Paper;
- b) adopt the provisions of the attached State Letter related to amendments the ICAO Flight Plan in a gradual manner in order to enhance the flight plans information exchange between users and ATS service providers of the CAR/SAM Regions; and
- c) take other actions as deemed necessary.



International
Civil Aviation
Organization

Organisation
de l'aviation civile
internationale

Organización
de Aviación Civil
Internacional

Международная
организация
гражданской
авиации

منظمة الطيران
المدني الدولي

国际民用
航空组织

Tel.: +1 (514) 954-6711

Ref.: AN 13/2.5-07/35

25 May 2007

Subject: Proposal for the amendment of the *Procedures for Air Navigation Services — Air Traffic Management* (PANS-ATM, Doc 4444), relating to flight plan provisions

Action Required: Comments to reach Montreal by 7 August 2007

Sir/Madam,

1. I have the honour to inform you that the Air Navigation Commission, at the fourth and fifth meetings of its 175th Session on 1 and 3 May 2007, considered a proposal to amend the flight plan provisions contained in the *Procedures for Air Navigation Services — Air Traffic Management* (PANS-ATM, Doc 4444), and authorized its transmission to Contracting States and appropriate international organizations for comment.
2. The proposed amendments, as modified by the discussions of the Commission, are contained in Attachment A to this letter.
3. The purpose of the proposed amendment is for the ICAO flight plan to meet future needs of aircraft with advanced capabilities and the evolving requirements of automated air traffic management (ATM) systems, while taking into account compatibility with existing systems, human factors, training, cost and transition aspects.
4. During its preliminary review of the proposal, the Commission noted in particular that this would be an interim step towards a future, completely revamped system that would satisfy the information management requirements that are prerequisite to the realization of the Global ATM Operational Concept.
5. It is deemed that implementation of this proposal for amendment will require a moderate amount of resources. In order to provide a solid basis for further impact assessment by the Commission, I would be grateful if you could provide me with an estimate of the financial and other resources required by air navigation services providers and aircraft operators in your State for implementation of the proposal.


6. In examining the proposed amendments, you should not feel obliged to comment on editorial aspects as such matters will be addressed by the Air Navigation Commission during its final review of the draft amendment.

7. May I request that any comments you may wish to make on the proposed amendments be dispatched to reach me not later than 7 August 2007. The Air Navigation Commission has asked me to specifically indicate that comments received after the due date may not be considered by the Commission and the Council. In this connection, should you anticipate a delay in the receipt of your reply please let me know in advance of the due date.

8. For your information, as implementation of this proposed amendment to the PANS-ATM is expected to require substantial time for preparation, it is envisaged for applicability on 18 November 2010. Any comments you may have thereon would be highly appreciated.

9. The subsequent work of the Air Navigation Commission and the Council would be greatly facilitated by specific statements on the acceptability or otherwise of the proposal. Please note that, for the review of your comments by the Air Navigation Commission and the Council, replies are normally classified as "agreement with or without comments", "disagreement with or without comments" or "no indication of position". If in your reply the expression "no objections" or "no comments" are used, they will be taken to mean "agreement without comment" and "no indication of position", respectively. In order to facilitate proper classification of your response, a form has been included in Attachment B which may be completed and returned together with your comments, if any, on the proposals in Attachment A.

Accept, Sir/Madam, the assurances of my highest consideration



Taïeb Chérif
Secretary General

Enclosures:

- A — Proposed amendment to the PANS-ATM
- B — Response form

Ref: AN 13/2.1

27 March 2008

To: President of the Council

From: President of the Air Navigation Commission

Subject: **Approval by the Air Navigation Commission of Amendment 1 to the *Procedures for Air Navigation Services — Air Traffic Management* (PANS-ATM, Doc 4444) (Council Subject No. 14.1.2)**

1. In accordance with the procedure accepted during the eighth and twelfth meetings of the 156th Session of the Council, on 8 and 15 March 1999 respectively, whereby the Council delegated the approval of amendments to PANS documentation to the Air Navigation Commission, subject to the approval by the President of the Council after their circulation to Representatives on the Council, on 22 and 24 January 2008, the Air Navigation Commission (177-1 and 177-2):

- a) approved, as Amendment 1 to the Fifteenth Edition to the PANS-ATM (Doc 4444), the amendment in Attachment A to this memorandum;
- b) approved the amendment to the Foreword presented in Attachment B to this memorandum; and
- c) agreed that the amendment should become applicable on 15 November 20012

2. Amendment 1 stems from the work of the Flight Plan Study Group (FPLSG). The nature and scope of the proposed amendment is to update the ICAO model flight plan form in order to meet the needs of aircraft with advanced capabilities and the evolving requirements of automated air traffic management (ATM) systems, while taking into account compatibility with existing systems, human factors, training, cost and transition aspects.

3. Amendment 1 to the PANS-ATM is now forwarded to you for approval after its circulation to the Representatives on the Council.

O.R. Nundu

Enclosures:

- A — Amendment 1 to the PANS-ATM
- B — Amendment to the Foreword

**PROPOSED AMENDMENT TO THE *PROCEDURES FOR AIR
NAVIGATION SERVICES — AIR TRAFFIC MANAGEMENT*
(*PANS-ATM, DOC 4444*)**

NOTES ON THE PRESENTATION OF THE PROPOSED AMENDMENT

The text of the amendment is arranged to show deleted text with a line through it and new text highlighted with grey shading, as shown below:

1. ~~Text to be deleted is shown with a line through it~~ text to be deleted
2. **New text to be inserted is highlighted with grey shading** new text to be inserted
3. ~~Text to be deleted is shown with a line through it~~ followed **by the replacement text which is highlighted with grey shading.** new text to replace existing text

**PROCEDURES FOR AIR NAVIGATION SERVICES — AIR
TRAFFIC MANAGEMENT (PANS-ATM, DOC 4444)**

...

CHAPTER 4. GENERAL PROVISIONS FOR AIR TRAFFIC SERVICES

...

4.4 FLIGHT PLAN

4.4.1 Flight plan form

Note.— *Procedures for the use of repetitive flight plans are contained in Chapter 16, Section 16.4.*

...

4.4.1.3 Operators and air traffic services units should comply with:

- a) the instructions for completion of the flight plan form and the repetitive flight plan listing form given in Appendix 2; and
- b) any constraints identified in relevant Aeronautical Information Publications (AIPs).

Note 1.— *Failure to adhere to the provisions of Appendix 2 or any constraint identified in relevant AIPs may result in data being rejected, processed incorrectly or lost.*

Note 2.— *The instructions for completing the flight plan form given in Appendix 2 may be conveniently printed on the inside cover of flight plan form pads, or posted in briefing rooms.*

...

4.4.2 Submission of a flight plan

4.4.2.1 PRIOR TO DEPARTURE

4.4.2.1.1 Flight plans shall not be submitted more than 120 hours before the estimated off-block time of a flight.

4.4.2.1.2 Except when other arrangements have been made for submission of repetitive flight plans, a flight plan submitted prior to departure should be submitted to the air traffic services reporting office at the departure aerodrome. If no such unit exists at the departure aerodrome, the flight plan should be submitted to the unit serving or designated to serve the departure aerodrome.

4.4.2.1.3 In the event of a delay of 30 minutes in excess of the estimated off-block time for a controlled flight or a delay of one hour for an uncontrolled flight for which a flight plan has been submitted, the flight plan should be amended or a new flight plan submitted and the old flight plan cancelled, whichever is applicable.

CHAPTER 11. AIR TRAFFIC SERVICES MESSAGES

...

11.4 MESSAGE TYPES AND THEIR APPLICATION

...

11.4.2 Movement and control messages

...

11.4.2.2 MOVEMENT MESSAGES

...

11.4.2.2.2 FILED FLIGHT PLAN (FPL) MESSAGES

Note.— Instructions for the transmission of an FPL message are contained in Appendix 2.

...

11.4.2.2.2.5 FPL messages ~~shall normally~~ **should** be transmitted immediately after the filing of the flight plan. ~~However, if a flight plan is filed more than 24 hours in advance of the estimated off-block time of the flight to which it refers, that flight plan shall be held in abeyance until at most 24 hours before the flight begins so as to avoid the need for the insertion of a date group into that~~ **the date of the flight departure shall be inserted in Item 18 of the flight plan. In addition, if a flight plan is filed early and the provisions of 11.4.2.2.2.2 b) or e) or 11.4.2.2.2.3 apply, transmission of the FPL message may be withheld until one hour before the estimated off block time, provided that this will permit each air traffic services unit concerned to receive the information at least 30 minutes before the time at which the aircraft is estimated to enter its area of responsibility.**

...

11.4.2.2.4 MODIFICATION (CHG) MESSAGES

A CHG message shall be transmitted when any change is to be made to basic flight plan data contained in previously transmitted FPL or RPL data. The CHG message shall be sent to those recipients of basic flight plan data which are affected by the change. **Relevant revised basic flight plan data shall be provided to such affected entities not previously having received this.**

Note.— See 11.4.2.3.4 concerning notification of a change to coordination data contained in a previously transmitted current flight plan or estimate message.

...

APPENDIX 2. FLIGHT PLAN

...

2. Instructions for the completion of the flight plan form

...

2.2 Instructions for insertion of ATS data

Complete Items 7 to 18 as indicated hereunder.

Complete also Item 19 as indicated hereunder, when so required by the appropriate ATS authority or when otherwise deemed necessary.

Note 1.— Item numbers on the form are not consecutive, as they correspond to Field Type numbers in ATS messages.

Note 2.— Air traffic services data systems may impose communications or processing constraints on information in filed flight plans. Possible constraints may, for example, be limits with regard to item length, number of elements in the route item or total flight plan length. Significant constraints are documented in the relevant Aeronautical Information Publication.

**ITEM 7: AIRCRAFT IDENTIFICATION
(MAXIMUM 7 CHARACTERS)**

INSERT one of the following aircraft identifications, not exceeding 7 alphanumeric characters and without hyphens or symbols:

a) the nationality or common mark and registration marking of the aircraft (e.g. EIAKO, 4XBCD, N2567GA), when:

- 1) in radiotelephony the call sign to be used by the aircraft will consist of this identification alone (e.g. OOTEKCGAJS), or preceded by the ICAO telephony designator for the aircraft operating agency (e.g. SABENA-OOTEKBLIZZARD CGAJS);
- 2) the aircraft is not equipped with radio;

OR b) the ICAO designator for the aircraft operating agency followed by the flight identification (e.g. KLM511, NGA213, JTR25) when in radiotelephony the call sign to be used by the aircraft will consist of the ICAO telephony designator for the operating agency followed by the flight identification (e.g. KLM511, NIGERIA 213, HERBIEJESTER 25);

Note 1.— Standards for nationality, common and registration marks to be used are contained in Annex 7, Chapter 2.

Note 2.— Provisions for the use of radiotelephony call signs are contained in Annex 10, Volume II, Chapter 5. ICAO designators and telephony designators for aircraft operating agencies are contained in Doc 8585 — Designators for Aircraft Operating Agencies, Aeronautical Authorities and Services.

ITEM 8: FLIGHT RULES AND TYPE OF FLIGHT (ONE OR TWO CHARACTERS)

Flight rules

INSERT one of the following letters to denote the category of flight rules with which the pilot intends to comply:

- I if it is intended that the entire flight will be operated under the IFR
- V if it is intended that the entire flight will be operated under the VFR
- Y if the flight initially will be operated under the IFR (first) and specify in Item 15 the point, followed by one or more subsequent changes of flight rules or
- Z if the flight initially will be operated under the VFR (first), followed by one or more subsequent changes of flight rules

Specify in Item 15 the point or points at which a change of flight rules is planned.

Type of flight

INSERT one of the following letters to denote the type of flight when so required by the appropriate ATS authority:

- S if scheduled air service
- N if non-scheduled air transport operation
- G if general aviation
- M if military
- X if other than any of the defined categories above.

Specify status of a flight following the indicator STS in Item 18, or when necessary to denote other reasons than listed for specific handling by ATS, indicate the reason following the indicator RMK in Item 18.

...

ITEM 10: EQUIPMENT AND CAPABILITIES

Capabilities comprise the following elements:

- a) presence of relevant serviceable equipment on board the aircraft;
- b) equipment and capabilities commensurate with flight crew qualifications; and
- c) where applicable, authorization from the appropriate authority.

Radio communication, navigation and approach aid equipment and capabilities

INSERT one letter as follows:

N if no COM/NAV/approach aid equipment for the route to be flown is carried, or the equipment is unserviceable,

OR S if standard COM/NAV/approach aid equipment for the route to be flown is carried and serviceable (see Note 1),

AND/OR

INSERT one or more of the following letters to indicate the serviceable COM/NAV/approach aid equipment and capabilities available and serviceable:

A	(Not allocated) GBAS landing system	J7	CPDLC FANS 1/A SATCOM (Iridium)
B	(Not allocated) LPV (APV with SBAS)	K	(MLS)
C	LORAN C	L	ILS
D	DME	M1	Omega ATC RTF SATCOM (INMARSAT)
E1	(Not allocated) FMC WPR ACARS	M2	ATC RTF (MTSAT)
E2	D-FIS ACARS	M3	ATC RTF (Iridium)
E3	PDC ACARS	O	VOR
F	ADF	P1-P9	(Not allocated) Reserved for RCP
G	(GNSS) (See Note 2)	Q	(Not allocated)
H	HF RTF	R	RNP type certification PBN approved (see Note 54)
I	Inertial Navigation	T	TACAN
J1	(Data Link) CPDLC ATN VDL Mode 2 (See Note 3)	U	UHF RTF
J2	CPDLC FANS 1/A HF DL	V	VHF RTF
J3	CPDLC FANS 1/A VDL Mode A	W	RVSM approved
J4	CPDLC FANS 1/A VDL Mode 2	X	MNPS approved
J5	CPDLC FANS 1/A SATCOM (INMARSAT)	Y	when prescribed by ATIS VHF with 8.33 kHz channel spacing capability
J6	CPDLC FANS 1/A SATCOM (MTSAT)	Z	Other equipment carried or other capabilities (see Note 25)

Any alphanumeric characters not indicated above are reserved.

Note 1.— ~~If the letter S is used, s~~Standard equipment is considered to be VHF RTF, ~~ADF~~, VOR and ILS, unless another combination is prescribed by the appropriate ATS authority.

Note 2.— If the letter G is used, the types of external GNSS augmentation, if any, are specified in Item 18 following the indicator NAV/ and separated by a space.

Note ~~25~~— If the letter Z is used, specify in Item 18 the other equipment carried or other capabilities, preceded by COM/ ~~and/or~~, NAV/ and/or DAT, as appropriate.

Note 3.— ~~If the letter J is used, specify in Item 18 the equipment carried, preceded by DAT/ followed by one or more letters as appropriate. See RTCA/EUROCAE Interoperability Requirements Standard For ATN Baseline 1 (ATN B1 INTEROP Standard – DO-280B/ED-110B) for data link services air traffic control clearance and information/air traffic control communications management/air traffic control microphone check.~~

Note 46.— Information on navigation capability is provided to ATC for clearance and routing purposes.

Note 54.— ~~Inclusion of~~If the letter R is used, the performance based navigation levels that can be met are specified in Item 18 following the indicator PBN/. Guidance material on the application of performance based navigation to a specific ~~indicates that an aircraft meets the RNP type prescribed for the route segment(s), route(s) and/or area concerned~~ is contained in the Performance-Based Navigation Manual (Doc 9613).

Surveillance equipment and capabilities
--

~~INSERT~~ N if no surveillance equipment for the route to be flown is carried, or the equipment is unserviceable,

~~OR~~

~~INSERT~~ one or ~~two~~ more of the following letters/descriptors, to a maximum of 20 characters, to describe the serviceable surveillance equipment ~~carried~~ and/or capabilities on board:

~~SSR equipment~~ ~~SSR Modes A and C~~

- ~~— N — Nil~~
- A Transponder — Mode A (4 digits — 4 096 codes)
- C Transponder — Mode A (4 digits — 4 096 codes) and Mode C

~~SSR Mode S~~

- ~~— X — Transponder — Mode S without both aircraft identification and pressure-altitude transmission~~
- E Transponder — Mode S, including aircraft identification, pressure-altitude and extended squitter (ADS-B) capability
- H Transponder — Mode S, including aircraft identification, pressure-altitude and enhanced surveillance capability
- I Transponder — Mode S, including aircraft identification, but no pressure-altitude capability

L	Transponder — Mode S, including aircraft identification, pressure-altitude, extended squitter (ADS-B) and enhanced surveillance capability
P	Transponder — Mode S, including pressure-altitude, but no aircraft identification transmission capability
I	Transponder — Mode S, including aircraft identification transmission, but no pressure altitude transmission
S	Transponder — Mode S, including both pressure altitude and aircraft identification transmission capability
X	Transponder — Mode S with neither aircraft identification nor pressure-altitude capability

Note.— Enhanced surveillance capability is the ability of the aircraft to down-link aircraft derived data via a Mode S transponder.

ADS-B

B1	ADS-B with dedicated 1090 MHz ADS-B “out” capability
B2	ADS-B with dedicated 1090 MHz ADS-B “out” and “in” capability
U1	ADS-B “out” capability using UAT
U2	ADS-B “out” and “in” capability using UAT
V1	ADS-B “out” capability using VDL Mode 4
V2	ADS-B “out” and “in” capability using VDL Mode 4

ADS-C

D1	ADS-C with FANS 1/A capabilities
G1	ADS-C with ATN capabilities

ADS equipment

~~D~~ — ADS capability

Alphanumeric characters not indicated above are reserved.

Example: ADE3RV/HB2U2V2G1

Note.— Additional surveillance application should be listed in Item 18 following the indicator SUR/ .

**ITEM 13: DEPARTURE AERODROME
AND TIME (8 CHARACTERS)**

INSERT the ICAO four-letter location indicator of the departure aerodrome as specified in Doc 7910, *Location Indicators*,

OR, if no location indicator has been assigned,

INSERT ZZZZ and *SPECIFY*, in Item 18, the name and location of the aerodrome preceded by DEP/ ,

OR, the first point of the route or the marker radio beacon preceded by DEP/..., if the aircraft has not taken off from the aerodrome,

OR, if the flight plan is received from an aircraft in flight,

INSERT AFIL, and *SPECIFY*, in Item 18, the ICAO four-letter location indicator of the location of the ATS unit from which supplementary flight plan data can be obtained, preceded by DEP/ .

THEN, WITHOUT A SPACE,

INSERT for a flight plan submitted before departure, the estimated off-block time (EOBT),

OR, for a flight plan received from an aircraft in flight, the actual or estimated time over the first point of the route to which the flight plan applies.

ITEM 15: ROUTE

INSERT the *first cruising speed* as in (a) and the *first cruising level* as in (b), without a space between them.

THEN, following the arrow, *INSERT* the route description as in (c).

(a) Cruising speed (maximum 5 characters)

INSERT the *True Air Speed* for the first or the whole cruising portion of the flight, in terms of:

Kilometres per hour, expressed as K followed by 4 figures (e.g. K0830), *or*

Knots, expressed as N followed by 4 figures (e.g. N0485), *or*

True Mach number, when so prescribed by the appropriate ATS authority, to the nearest hundredth of unit Mach, expressed as M followed by 3 figures (e.g. M082).

(b) Cruising level (maximum 5 characters)

INSERT the planned cruising level for the first or the whole portion of the route to be flown, in terms of:

Flight level, expressed as F followed by 3 figures (e.g. F085; F330), *or*

**Standard Metric Level in tens of metres*, expressed as S followed by 4 figures (e.g. S1130), *or*

Altitude in hundreds of feet, expressed as A followed by 3 figures (e.g. A045; A100), *or*

Altitude in tens of metres, expressed as M followed by 4 figures (e.g. M0840), *or*

for uncontrolled VFR flights, the letters VFR.

*When so prescribed by the appropriate ATS authorities.

(c) Route (including changes of speed, level and/or flight rules)

Flights along designated ATS routes

INSERT, if the departure aerodrome is located on or connected to the ATS route, the designator of the first ATS route,

OR, if the departure aerodrome is not on or connected to the ATS route, the letters DCT followed by the point of joining the first ATS route, followed by the designator of the ATS route.

THEN

INSERT each point at which either a change of speed and/or level is planned to commence, or a change of ATS route, and/or a change of flight rules is planned,

Note.— When a transition is planned between a lower and upper ATS route and the routes are oriented in the same direction, the point of transition need not be inserted.

FOLLOWED IN EACH CASE

by the designator of the next ATS route segment, even if the same as the previous one,
OR by DCT, if the flight to the next point will be outside a designated route, unless both points are defined by geographical coordinates.

Flights outside designated ATS routes

INSERT points normally not more than 30 minutes flying time or 370 km (200 NM) apart, including each point at which a change of speed or level, a change of track, or a change of flight rules is planned.

OR, when required by appropriate ATS authority(ies),

DEFINE the track of flights operating predominantly in an east-west direction between 70°N and 70°S by reference to significant points formed by the intersections of half or whole degrees of latitude with meridians spaced at intervals of 10 degrees of longitude. For flights operating in areas outside those latitudes the tracks shall be defined by significant points formed by the intersection of parallels of latitude with meridians normally spaced at 20 degrees of longitude. The distance between significant points shall, as far as possible, not exceed one hour's flight time. Additional significant points shall be established as deemed necessary.

For flights operating predominantly in a north-south direction, define tracks by reference to significant points formed by the intersection of whole degrees of longitude with specified parallels of latitude which are spaced at 5 degrees.

INSERT DCT between successive points unless both points are defined by geographical coordinates or by bearing and distance.

USE ONLY the conventions in (1) to (5) below and *SEPARATE* each sub-item by a space.

(1) ATS route (2 to 7 characters)

The coded designator assigned to the route or route segment including, where appropriate, the coded designator assigned to the standard departure or arrival route (e.g. BCN1, BI, R14, UB10, KODAP2A).

Note.— Provisions for the application of route designators are contained in Annex 11, Appendix 1, whilst guidance material on the application of an RNP type to a specific route segment(s), route(s) or area is contained in the Manual on Required Navigation Performance (RNP) (Doc 9613).

(2) Significant point (2 to 11 characters)

The coded designator (2 to 5 characters) assigned to the point (e.g. LN, MAY, HADDY), or, if no coded designator has been assigned, one of the following ways:

— *Degrees only (7 characters):*

2 figures describing latitude in degrees, followed by “N” (North) or “S” (South), followed by 3 figures describing longitude in degrees, followed by “E” (East) or “W” (West). Make up the correct number of figures, where necessary, by insertion of zeros, e.g. 46N078W.

— *Degrees and minutes (11 characters):*

4 figures describing latitude in degrees and tens and units of minutes followed by “N” (North) or “S” (South), followed by 5 figures describing longitude in degrees and tens and units of minutes, followed by “E” (East) or “W” (West). Make up the correct number of figures, where necessary, by insertion of zeros, e.g. 4620N07805W.

— *Bearing and distance from a navigation aid significant point:*

The identification of the navigation aid (normally a VOR) significant point, in the form of 2 or 3 characters, THEN followed by the bearing from the aid point in the form of 3 figures giving degrees magnetic, THEN followed by the distance from the aid point in the form of 3 figures expressing nautical miles. In areas of high latitude where it is determined by the appropriate authority that reference to degrees magnetic is impractical, degrees true may be used. Make up the correct number of figures, where necessary, by insertion of zeros — e.g. a point 180° magnetic at a distance of 40 nautical miles from VOR “DUB” should be expressed as DUB180040.

(3) Change of speed or level
(maximum 21 characters)

The point at which a change of speed (5% TAS or 0.01 Mach or more) or a change of level is planned to commence, expressed exactly as in (2) above, followed by an oblique stroke and both the cruising speed and the cruising level, expressed exactly as in (a) and (b) above, without a space between them, even when only one of these quantities will be changed.

Examples: LN/N0284A045
MAY/N0305F180
HADDY/N0420F330
4602N07805W/N0500F350
46N078W/M082F330

DUB180040/N0350M0840

- (4) Change of flight rules
(maximum 3 characters)

The point at which the change of flight rules is planned, expressed exactly as in (2) or (3) above as appropriate, followed by a space and one of the following:

VFR if from IFR to VFR

IFR if from VFR to IFR

Examples: LN VFR

LN/N0284A050 IFR

- (5) Cruise climb (maximum 28 characters)

The letter C followed by an oblique stroke; THEN the point at which cruise climb is planned to start, expressed exactly as in (2) above, followed by an oblique stroke; THEN the speed to be maintained during cruise climb, expressed exactly as in (a) above, followed by the two levels defining the layer to be occupied during cruise climb, each level expressed exactly as in (b) above, or the level above which cruise climb is planned followed by the letters PLUS, without a space between them.

Examples: C/48N050W/M082F290F350

C/48N050W/M082F290PLUS

C/52N050W/M220F580F620.

**ITEM 16: DESTINATION AERODROME AND
TOTAL ESTIMATED ELAPSED TIME,
DESTINATION ALTERNATE AERODROME(S)**

Destination aerodrome and total
estimated elapsed time (8 characters)

INSERT the ICAO four-letter location indicator of the destination aerodrome ~~followed, without a space, by the total estimated elapsed time~~ as specified in Doc 7910, *Location Indicators*,

OR , if no location indicator has been assigned,

INSERT ZZZZ ~~followed, without a space, by the total estimated elapsed time~~, and *SPECIFY* in Item 18 the name ~~and location~~ of the aerodrome, preceded by DEST/ .

THEN WITHOUT A SPACE

INSERT the total estimated elapsed time.

Note.— For a flight plan received from an aircraft in flight, the total estimated elapsed time is the

estimated time from the first point of the route to which the flight plan applies to the termination point of the flight plan.

Destination ~~A~~ Alternate aerodrome(s) (4 characters)

INSERT the ICAO four-letter location indicator(s) of not more than two destination alternate aerodromes, as specified in Doc 7910, *Location Indicators*, separated by a space,

OR, if no location indicator has been assigned to the destination alternate aerodrome(s),

INSERT ZZZZ and *SPECIFY* in Item 18 the name and location of the destination alternate aerodrome(s), preceded by ALTN/ .

ITEM 18: OTHER INFORMATION

Note.— Use of indicators not included under this item may result in data being rejected, processed incorrectly or lost.

Hyphens or oblique strokes should only be used as prescribed below.

INSERT 0 (zero) if no other information,

OR, any other necessary information in the preferred sequence shown hereunder, in the form of the appropriate indicator selected from those defined hereunder followed by an oblique stroke and the information to be recorded:

STS/ Reason for special handling by ATS, e.g. a search and rescue mission, as follows:

- ALTRV: for a flight operated in accordance with an altitude reservation;
- ATFMX: for a flight approved for exemption from ATFM measures by the appropriate ATS authority;
- FFR: fire-fighting;
- FLTCK: flight check for calibration of nav aids;
- HAZMAT: for a flight carrying hazardous material;
- HEAD: a flight with Head of State status;
- HOSP: for a medical flight declared by medical authorities;
- HUM: for a flight operating on a humanitarian mission;
- MARSA: for a flight for which a military entity assumes responsibility for separation of military aircraft;
- MEDEVAC: for a life critical medical emergency evacuation;
- NONRVSM: for a non-RVSM capable flight intending to operate in RVSM airspace;
- SAR: for a flight engaged in a search and rescue mission; and
- STATE: for a flight engaged in military, customs or police services.

Other reasons for special handling by ATS shall be denoted under the designator RMK/.

PBN/ Indication of RNAV and/or RNP capabilities. Include as many of the descriptors below, as apply to the flight, up to a maximum of 8 entries, i.e. a total of not more than 16 characters.

	RNAV SPECIFICATIONS
A1	RNAV 10 (RNP 10)
B1	RNAV 5 all permitted sensors
B2	RNAV 5 GNSS
B3	RNAV 5 DME/DME
B4	RNAV 5 VOR/DME
B5	RNAV 5 INS or IRS
B6	RNAV 5 LORANC
C1	RNAV 2 all permitted sensors
C2	RNAV 2 GNSS
C3	RNAV 2 DME/DME
C4	RNAV 2 DME/DME/IRU
D1	RNAV 1 all permitted sensors
D2	RNAV 1 GNSS
D3	RNAV 1 DME/DME
D4	RNAV 1 DME/DME/IRU
	RNP SPECIFICATIONS
L1	RNP 4
O1	Basic RNP 1 all permitted sensors
O2	Basic RNP 1 GNSS
O3	Basic RNP 1 DME/DME
O4	Basic RNP 1 DME/DME/IRU
S1	RNP APCH
S2	RNP APCH with BARO-VNAV
T1	RNP AR APCH with RF (special authorization required)
T2	RNP AR APCH without RF (special authorization required)

Combinations of alphanumeric characters not indicated above are reserved.

~~EET/~~ — Significant points or FIR boundary designators and accumulated estimated elapsed times to such points or FIR boundaries, when so prescribed on the basis of regional air navigation agreements, or by the appropriate ATS authority.

Examples: ~~EET/CAP0745 XYZ0830~~
~~—————EET/EINN0204~~

~~RIF/~~ — The route details to the revised destination aerodrome, followed by the ICAO four letter location indicator of the aerodrome. The revised route is subject to reclearance in flight.

—————Examples: ~~RIF/DTA HEC KLAX~~
~~—————Examples: RIF/ESP G94 CLA YPPH~~
~~—————Examples: RIF/LEMD~~

~~REG/ — The registration markings of the aircraft, if different from the aircraft identification in Item 7.~~

~~SEL/ — SELCAL Code, if so prescribed by the appropriate ATS authority.~~

~~OPR/ — Name of the operator, if not obvious from the aircraft identification in Item 7.~~

~~STS/ — Reason for special handling by ATS, e.g. hospital aircraft, one engine inoperative, e.g. STS/HOSP, STS/ONE ENG INOP.~~

~~TYP/ — Type(s) of aircraft, preceded if necessary by number(s) of aircraft, if ZZZZ is inserted in Item 9.~~

~~PER/ — Aircraft performance data, if so prescribed by the appropriate ATS authority.~~

~~COM/ — Significant data related to communication equipment as required by the appropriate ATS authority, e.g. COM/UHF only.~~

~~DAT/ — Significant data related to data link capability, using one or more of the letters S, H, V and M, e.g. DAT/S for satellite data link, DAT/H for HF data link, DAT/V for VHF data link, DAT/M for SSR Mode S data link.~~

NAV/ Significant data related to navigation equipment, other than specified in PBN/, as required by the appropriate ATS authority. Indicate GNSS augmentation under this indicator, with a space between two or more methods of augmentation, e.g. NAV/GBAS SBAS.

COM/ Indicate communications applications or capabilities not specified in Item 10a.

DAT/ Indicate data applications or capabilities not specified in 10a.

SUR/ Include surveillance applications or capabilities not specified in Item 10b.

DEP/ Name and location of departure aerodrome, if ZZZZ is inserted in Item 13, or the ICAO four-letter location indicator of the location of the ATS unit from which supplementary flight plan data can be obtained, if AFIL is inserted in Item 13. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location as follows:

With 4 figures describing latitude in degrees and tens and units of minutes followed by “N” (North) or “S” (South), followed by 5 figures describing longitude in degrees and tens and units of minutes, followed by “E” (East) or “W” (West). Make up the correct number of figures, where necessary, by insertion of zeros, e.g. 4620N07805W (11 characters).

OR, Bearing and distance from the nearest significant point, as follows:

The identification of the significant point followed by the bearing from the point in the form of 3 figures giving degrees magnetic, followed by the distance from the point in the form of 3 figures expressing nautical miles. In areas of high latitude where it is determined by the appropriate authority that reference to degrees magnetic is impractical, degrees true may be used. Make up the correct number of figures, where necessary, by insertion of zeros, e.g. a point of 180° magnetic at a distance of 40 nautical miles from VOR “DUB” should be expressed as DUB180040.

OR, The first point of the route (name or LAT/LONG) or the marker radio beacon, if the aircraft has not taken off from an aerodrome.

DEST/ Name and location of destination aerodrome, if ZZZZ is inserted in Item 16. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location in LAT/LONG or bearing and distance from the nearest significant point, as described under DEP/ above.

DOF/ The date of flight departure in a six figure format (YYMMDD, where YY equals the year, MM equals the month and DD equals the day).

REG/ The nationality or common mark and registration mark of the aircraft, if different from the aircraft identification in Item 7.

EET/ Significant points or FIR boundary designators and accumulated estimated elapsed times from take-off to such points or FIR boundaries, when so prescribed on the basis of regional air navigation agreements, or by the appropriate ATS authority.

Examples: EET/CAP0745 XYZ0830
EET/EINN0204

SEL/ SELCAL Code, for aircraft so equipped.

TYP/ Type(s) of aircraft, preceded if necessary without a space by number(s) of aircraft and separated by one space, if ZZZZ is inserted in Item 9.

Example: TYP/2F15 5F5 3B2

~~ALTN/ — Name of destination alternate aerodrome(s), if ZZZZ is inserted in Item 16.~~

~~RALT/ — Name of en-route alternate aerodrome(s).~~

CODE/ Aircraft address (expressed in the form of an alphanumerical code of six hexadecimal characters) when required by the appropriate ATS authority. Example: “F00001” is the lowest aircraft address contained in the specific block administered by ICAO.

DLE/ Enroute delay or holding, insert the significant point(s) on the route where a delay is planned to occur, followed by the length of delay using four figure time in hours and minutes (hhmm).

Example: DLE/MDG0030

OPR/ ICAO designator or name of the aircraft operating agency, if different from the aircraft identification in item 7.

ORGN/ The originator’s 8 letter AFTN address or other appropriate contact details, in cases where the originator of the flight plan may not be readily identified, as required by the appropriate ATS authority.

Note.— In some areas, flight plan reception centres may insert the ORGN/ identifier and originator’s AFTN address automatically.

PER/ Aircraft performance data, indicated by a single letter as specified in the *Procedures for Air Navigation Services — Aircraft Operations* (PANS-OPS, Doc 8168), *Volume I — Flight Procedures*, if so prescribed by the appropriate ATS authority.

ALTN/ Name of destination alternate aerodrome(s), if ZZZZ is inserted in Item 16. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location in LAT/LONG or bearing and distance from the nearest significant point, as described in DEP/ above.

RALT/ ICAO four letter indicator(s) for en-route alternate(s), as specified in Doc 7910, *Location Indicators*, or name(s) of en-route alternate aerodrome(s), if no indicator is allocated. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location in LAT/LONG or bearing and distance from the nearest significant point, as described in DEP/ above.

TALT/ ICAO four letter indicator(s) for take-off alternate, as specified in Doc 7910, *Location Indicators*, or name of take-off alternate aerodrome, if no indicator is allocated. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location in LAT/LONG or bearing and distance from the nearest significant point, as described in DEP/ above.

RIF/ The route details to the revised destination aerodrome, following by the ICAO four-letter location indicator of the aerodrome. The revised route is subject to reclearance in flight.

Examples: RIF/DTA HEC KLAX
RIF/ESP G94 CLA YPPH

RMK/ Any other plain language remarks when required by the appropriate ATS authority or deemed necessary.

ITEM 19: SUPPLEMENTARY INFORMATION

...

4. Instructions for the transmission of a supplementary flight plan (SPL) message

Items to be transmitted

Transmit items as indicated hereunder, unless otherwise prescribed:

- a) AFTN Priority Indicator, Addressee Indicators <<≡, Filing Time, Originator Indicator <<≡ and, if necessary, specific identification of addressees and/or originator;
- b) commencing with <<≡ (SPL:

all symbols and data in the unshaded areas of boxes 7, 13, 16 and 18, except that the ‘)’ at the end of box 18 is *not* to be transmitted, and then the symbols in the unshaded area of box 19 down to and including the)<<≡ of box 19,

additional alignment functions as necessary to prevent the inclusion of more than 69 characters in any line of Items 18 and 19. The alignment function is to be inserted only in lieu of a space, so as not to break up a group of data,

letter shifts and figure shifts (not pre-printed on the form) as necessary;

c) the AFTN Ending, as described below:

End-of-Text Signal

a) one LETTER SHIFT

b) two CARRIAGE RETURNS, one LINE FEED

Page-feed Sequence

Seven LINE FEEDS

End-of-Message Signal

Four of the letter N.

...

**7. Instructions for the completion of
the repetitive flight plan (RPL) listing form**

...

7.4 Instructions for insertion of RPL data

...

ITEM G: SUPPLEMENTARY DATA AT

INSERT name and appropriate contact details of contact entity where information normally provided under Item 19 of the FPL is kept readily available and can be supplied without delay.

...

APPENDIX 3. AIR TRAFFIC SERVICES MESSAGES

1. Message contents, formats and data conventions

...

1.2 The standard types of field

...

The standard fields of data permitted in ATS messages are as shown in the following table. The numbers in column 1 correspond with those in the reference table on page A3-30.

<i>Field type</i>	<i>Data</i>
3	Message type, number and reference data
5	Description of emergency
7	Aircraft identification and SSR Mode and Code
8	Flight rules and type of flight
9	Number and type of aircraft and wake turbulence category
10	Equipment and capabilities
13	Departure aerodrome and time
14	Estimate data
15	Route
16	Destination aerodrome and total estimated elapsed time, destination alternate aerodrome(s)
17	Arrival aerodrome and time
18	Other information
19	Supplementary information
20	Alerting search and rescue information
21	Radio failure information
22	Amendment

...

1.6 Data conventions

...

1.6.3 The expression of position or route

The following alternative data conventions shall be used for the expression of position or route:

- a) from 2 to 7 characters, being the coded designator assigned to an ATS route to be flown;

- b) from 2 to 5 characters, being the coded designator assigned to an en-route point;
- c) 4 numerics describing latitude in degrees and tens and units of minutes, followed by “N” (meaning “North”) or “S” (South), followed by 5 numerics describing longitude in degrees and tens and units of minutes, followed by “E” (East) or “W” (West). The correct number of numerics is to be made up, where necessary, by the insertion of zeros, e.g. “4620N07805W”;
- d) 2 numerics describing latitude in degrees, followed by “N” (North) or “S” (South), followed by 3 numerics describing longitude in degrees, followed by “E” (East) or “W” (West). Again, the correct number of numerics is to be made up, where necessary, by the insertion of zeros, e.g. “46N078W”;
- e) 2 or 3 to 5 characters being the coded identification of a navigation aid (normally a VOR) significant point, followed by 3 decimal numerics giving the bearing from the point in degrees magnetic followed by 3 decimal numerics giving the distance from the point in nautical miles. The correct number of numerics is to be made up, where necessary, by the insertion of zeros, e.g. a point at 180° magnetic at a distance of 40 nautical miles from VOR “FOJ” would be expressed as “FOJ180040”.

...

Field Type 8 — Flight rules and type of flight

Format:— ^{*}

a	b
---	---

SINGLE HYPHEN

<p>(a) <i>Flight Rules</i> 1 LETTER as follows: I if IFR it is intended that the entire flight will be operated under the IFR V if VFR it is intended that the entire flight will be operated under the VFR Y if IFR first the flight initially will be operated under the IFR, followed by one or more subsequent changes of flight rules Z if VFR first the flight initially will be operated under the VFR, followed by one or more subsequent changes of flight rules <i>Note.— If the letter Y or Z is used, the point or points at which a change of flight rules is planned is to be shown as indicated in Field Type 15.</i></p>
--

- * This field shall be terminated here unless indication of the type of flight is required by the appropriate ATS authority.

...

Field Type 10 — Equipment and Capabilities

Format:—

a

 /

b

SINGLE HYPHEN

(a) Radio Communication, Navigation and Approach Aid Equipment and Capabilities	
	1 LETTER as follows:
N	no COM/NAV/approach aid equipment for the route to be flown is carried, or the equipment is unserviceable
OR	S Standard COM/NAV/approach aid equipment for the route to be flown is carried and serviceable (<i>See Note 1</i>)
AND/OR	ONE OR MORE OF THE FOLLOWING LETTERS to indicate the serviceable COM/NAV/approach aid equipment serviceable and capabilities
A	(Not allocated) GBAS landing system J7 CPDLC FANS 1/A SATCOM (Iridium)
B	(Not allocated) LPV (APV with SBAS) K (MLS) L ILS
C	LORAN C M1 Omega ATC RTF SATCOM
D	DME (INMARSAT)
E1	(Not allocated) FMC WPR M2 ATC RTF (MTSAT)
	ACARS M3 ATC RTF (Iridium)
E2	D-FIS ACARS O VOR
E3	PDC ACARS P1-P9 (Not allocated) Reserved for RCP
F	ADF Q
G	(GNSS) (<i>See Note 2</i>) R (Not allocated)
H	HF RTF RNP type certification PBN approved
I	Inertial Navigation (<i>see Note 54</i>)
J1	(Data link) CPDLC ATN VDL Mode 2 (<i>see Note 3</i>) T TACAN
J2	CPDLC FANS 1/A HF DL U UHF RTF
J3	CPDLC FANS 1/A VDL Mode A W RVSM approved
J4	CPDLC FANS 1/A VDL Mode 2 X MNPS approved
J5	CPDLC FANS 1/A SATCOM Z Other equipment carried or other capabilities (<i>see Note 25</i>)
J6	CPDLC FANS 1/A SATCOM (MTSAT) Y when prescribed by ATIS VHF with 8.33 kHz channel spacing capability

Note 1.— If the letter S is used, sStandard equipment is considered to be VHF RTF, ADF, VOR and ILS, unless another combination is prescribed by the appropriate ATS authority.

Note 2.— If the letter G is used, the types of external GNSS augmentation, if any, are specified in Item 18 following the indicator NAV/ separated by a space.

Note 25.— If the letter Z is used, specify in Item 18 the other ~~the~~ equipment carried or other capabilities ~~is to be specified in Item 18,~~ preceded by COM/ , ~~and/or~~ NAV/ and/or DAT, as appropriate.

Note 3.— If the letter J is used, specify in Item 18 the equipment carried, preceded by DAT/ followed by one or more letters as appropriate. See RTCA/EUROCAE Interoperability Requirements Standard For ATN Baseline 1 (ATN B1 INTEROP Standard – DO-280B/ED-110B) for data link services air traffic control clearance and information/air traffic control communications management/air traffic control microphone check.

~~Note 46.~~— Information on navigation capability is provided to ATC for clearance and routing purposes.

~~Note 54.~~— ~~Inclusion of~~ If the letter R is used, the performance based navigation levels that can be met are specified in Item 18 following the indicator PBN/. Guidance material on the application of performance-based navigation to a specific ~~indicates that an aircraft meets the RNP type prescribed for the route segment(s), route(s) and/or area concerned is contained in the Performance-Based Navigation Manual (Doc 9613).~~

OBLIQUE STROKE

(b) Surveillance Equipment and capabilities

ONE OR ~~TWO LETTERS~~ MORE of the following descriptors, to a maximum of 20 characters, to describe the serviceable surveillance equipment ~~carried~~ and/or capabilities on board:

SSR equipment Modes A and C

~~N Nil~~

A Transponder — Mode A (4 digits — 4 096 codes)

C Transponder — Mode A (4 digits — 4 096 codes) and Mode C

SSR Mode S

~~X Transponder — Mode S without both aircraft identification and pressure-altitude transmission~~

E Transponder — Mode S, including aircraft identification, pressure-altitude and extended squitter (ADS-B) capability

H Transponder — Mode S, including aircraft identification, pressure-altitude and enhanced surveillance capability

I Transponder — Mode S, including aircraft identification, but no pressure-altitude capability

L Transponder — Mode S, including aircraft identification, pressure-altitude, extended squitter (ADS-B) and enhanced surveillance capability

P Transponder — Mode S, including pressure-altitude, but no aircraft identification ~~transmission~~ capability

~~I Transponder — Mode S, including aircraft identification transmission, but no pressure-altitude transmission~~

S Transponder — Mode S, including both pressure altitude and aircraft identification ~~transmission~~ capability

X Transponder — Mode S with neither aircraft identification nor pressure-altitude capability

Note.— Enhanced surveillance capability is the ability of the aircraft to down-link aircraft derived data via a Mode S transponder.

ADS-B

B1 ADS-B with dedicated 1090 MHz ADS-B “out” capability

- B2 ADS-B with dedicated 1090 MHz ADS-B “out” and “in” capability
- U1 ADS-B “out” capability using UAT
- U2 ADS-“out” and “in” capability using UAT
- V1 ADS-B “out” capability using VDL Mode 4
- V2 ADS-B “out” and “in” capability using VDL Mode 4

ADS-C

- D1 ADS-C with FANS 1/A capabilities
- G1 ADS-C with ATN capabilities

ADS equipment

D — ADS capability

Alphanumeric characters not indicated above are reserved.


Note.— Additional surveillance application should be listed in Item 18 following the indicator SUR/ .

Examples: –S/A

- SCHJ/CDB1
- SAFJR/SDV1

...

Field Type 13 — Departure aerodrome and time



SINGLE HYPHEN

(a) Departure Aerodrome

4 LETTERS, being

the ICAO four-letter location indicator allocated to the departure aerodrome as specified in Doc 7910, *Location Indicators*, or

ZZZZ if no ICAO location indicator has been allocated (*see Note 1*) or if the departure aerodrome is not known, or

AFIL if the flight plan has been filed in the air (*see Note 2*).

Note 1.— If ZZZZ is used, the name and location of the departure aerodrome is to be shown in the Other Information Field (see Field Type 18) if this Field Type is contained in the message.

Note 2.— If AFIL is used, the ATS unit from which supplementary flight data can be obtained is to be shown in the Other Information Field (Field Type 18).

* This field shall be terminated here in message types ~~CHG, CNL, ARR, CPL,~~ EST, CDN; ~~and ACP and RQS~~. It shall be terminated here in message type RQP if the estimated off-block time is not known.

(b) *Time*

4 NUMERICS giving

the estimated off-block time (EOBT) at the aerodrome in (a) in FPL, ARR, CHG, CNL, ~~and DLA~~ and RQS messages transmitted before departure and in RQP message, if known, or


the actual time of departure from the aerodrome in (a) in ALR, DEP and SPL messages, or

the actual or estimated time of departure from the first point shown in the Route Field (see Field Type 15) in FPL messages derived from flight plans filed in the air, as shown by the letters AFIL in (a).

Examples: -EHAM0730
 -AFIL1625

...

Field Type 14 — Estimate data



SINGLE HYPHEN

(a) *Boundary Point (see Note 1)*

The BOUNDARY POINT expressed either by a designator consisting of 2 to 5 characters, in Geographical Coordinates, in Abbreviated Geographical Coordinates, or by bearing and distance from a ~~designated~~ significant point (e.g. a ~~VOR~~).

Note 1.— This point may be an agreed point located close to, rather than on, the FIR boundary.

Note 2.— See 1.6 for data conventions.

(b) *Time of Arrival*

4 NUMERICS, giving
the actual time of arrival.

* This field is to be terminated here if an ICAO location indicator has been allocated to the arrival aerodrome.

Field Type 18 — Other information

Note.— Use of indicators not included under this item may result in data being rejected, processed incorrectly or lost.

Hyphens or oblique strokes should only be used as prescribed below.

Format:— [a]

— [] ^{or} [] (sp) [] (sp) * (sp) []
(* additional elements as necessary)

SINGLE HYPHEN

(a) 0 (zero) if no other information,

OR,

Any other necessary information in the ~~preferred~~ sequence shown hereunder, in the form of the appropriate indicator selected from those defined hereunder followed by an oblique stroke and the information to be recorded:

STS/ Reason for special handling by ATS, e.g. a search and rescue mission, as follows:

ALTRV: for a flight operated in accordance with an altitude reservation;

ATFMX: for a flight approved for exemption from ATFM measures by the appropriate ATS authority;

FFR: fire-fighting;

FLTCK: flight check for calibration of nav aids;

HAZMAT: for a flight carrying hazardous material;

HEAD: a flight with Head of State status;

HOSP: for a medical flight declared by medical authorities;

HUM: for a flight operating on a humanitarian mission;

MARSA: for a flight for which a military entity assumes responsibility for separation of military aircraft;

MEDEVAC: for a life critical medical emergency evacuation;

NONRVSM: for a non-RVSM capable flight intending to operate in RVSM airspace;

SAR: for a flight engaged in a search and rescue mission; and

STATE: for a flight engaged in military, customs or police services.

Other reasons for special handling by ATS shall be denoted under the designator RMK/.

PBN/ Indication of RNAV and/or RNP capabilities. Include as many of the descriptors below, as apply to the flight, up to a maximum of 8 entries, i.e. a total of not more than 16 characters.

	RNAV SPECIFICATIONS
A1	RNAV10 (RNP 10)
B1	RNAV 5 all permitted sensors
B2	RNAV 5 GNSS
B3	RNAV 5 DME/DME
B4	RNAV 5 VOR/DME
B5	RNAV 5 INS or IRS
B6	RNAV 5 LORANC
C1	RNAV 2 all permitted sensors
C2	RNAV 2 GNSS
C3	RNAV 2 DME/DME
C4	RNAV 2 DME/DME/IRU
D1	RNAV 1 all permitted sensors
D2	RNAV 1 GNSS
D3	RNAV 1 DME/DME
D4	RNAV 1 DME/DME/IRU
	RNP SPECIFICATIONS
L1	RNP 4
O1	Basic RNP 1 all permitted sensors
O2	Basic RNP 1 GNSS
O3	Basic RNP 1 DME/DME
O4	Basic RNP 1 DME/DME/IRU
S1	RNP APCH
S2	RNP APCH with BAR-VNAV
T1	RNP AR APCH with RF (special authorization required)
T2	RNP AR APCH without RF (special authorization required)

Combinations of alphanumeric characters not indicated above are reserved.

~~EET/~~ Significant points or FIR boundary designators and accumulated estimated elapsed times to such points or FIR boundaries, when so prescribed on the basis of regional air navigation agreements, or by the appropriate ATS authority.

~~Examples:~~ ~~EET/CAP0745 XYZ0830~~

~~————— EET/EINN0204~~

~~RIF/~~ The route details to the revised destination aerodrome, followed by the ICAO four letter location indicator of the aerodrome. The revised route is subject to reclearance in flight.

~~Examples: RIF/DTA HEC KLAX~~

~~Examples: RIF/ESP G94 CLA YPPH~~

~~Examples: RIF/LEMD~~

~~REG/ The registration markings of the aircraft, if different from the aircraft identification in Item 7.~~

~~SEL/ SELCAL Code, if so prescribed by the appropriate ATS authority.~~

~~OPR/ Name of the operator, if not obvious from the aircraft identification in Item 7.~~

~~STS/ Reason for special handling by ATS, e.g. hospital aircraft, one engine inoperative, e.g. STS/HOSP, STS/ONE ENG INOP.~~

~~TYP/ Type(s) of aircraft, preceded if necessary by number(s) of aircraft, if ZZZZ is inserted in Item 9.~~

~~PER/ Aircraft performance data, if so prescribed by the appropriate ATS authority.~~

~~COM/ Significant data related to communication equipment as required by the appropriate ATS authority, e.g. COM/UHF only.~~

~~DAT/ Significant data related to data link capability, using one or more of the letters S, H, V and M, e.g. DAT/S for satellite data link, DAT/H for HF data link, DAT/V for VHF data link, DAT/M for SSR Mode S data link.~~

~~NAV/ Significant data related to navigation equipment, other than specified in PBN/, as required by the appropriate ATS authority. Indicate GNSS augmentation under this indicator, with a space between two or more methods of augmentation, e.g. NAV/GBAS SBAS.~~

~~COM/ Indicate communications applications or capabilities not specified in Item 10a.~~

~~DAT/ Indicate data applications or capabilities not specified in Item 10a.~~

~~SUR/ Include surveillance applications or capabilities not specified in Item 10b.~~

~~DEP/ Name and location of departure aerodrome, if ZZZZ is inserted in Item 13, or the ICAO four-letter location indicator of the location of the ATS unit from which supplementary flight plan data can be obtained, if AFIL is inserted in Item 13. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location as follows:~~

~~With 4 figures describing latitude in degrees and tens and units of minutes followed by “N” (North) or “S” (South), followed by 5 figures describing longitude in degrees and tens and units of minutes, followed by “E” (East) or “W” (West). Make up the correct number of figures, where necessary, by insertion of zeros, e.g. 4620N07805W (11 characters).~~

~~OR Bearing and distance from the nearest significant point, as follows:~~

~~The identification of the significant point followed by the bearing from the point in the form of 3 figures giving degrees magnetic, followed by the distance from the point in the form of 3 figures expressing nautical miles. In areas of high latitude where it is determined by the appropriate authority that reference to degrees magnetic is impractical, degrees true may be~~

used. Make up the correct number of figures, where necessary, by insertion of zeros, e.g. a point of 180° magnetic at a distance of 40 nautical miles from VOR “DUB” should be expressed as DUB180040.

OR The first point of the route (name or LAT/LONG) or the marker radio beacon, if the aircraft has not taken off from an aerodrome.

DEST/ Name and location of destination aerodrome, if ZZZZ is inserted in Item 16. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location in LAT/LONG or bearing and distance from the nearest significant point, as described under DEP/ above.

DOF/ The date of flight departure in a six figure format (YYMMDD, where YY equals the year, MM equals the month and DD equals the day).

REG/ The nationality or common mark and registration mark of the aircraft, if different from the aircraft identification in Item 7.

EET/ Significant points or FIR boundary designators and accumulated estimated elapsed times from take-off to such points or FIR boundaries, when so prescribed on the basis of regional air navigation agreements, or by the appropriate ATS authority.

Examples: EET/CAP0745 XYZ0830
EET/EINN0204

SEL/ SELCAL Code, for aircraft so equipped.

TYP/ Type(s) of aircraft, preceded if necessary without a space by number(s) of aircraft and separated by one space, if ZZZZ is inserted in Item 9.

Example: –TYP/2F15, 5F5, 3B2

~~ALTN/— Name of destination alternate aerodrome(s), if ZZZZ is inserted in Item 16.~~

~~RALT/— Name of en-route alternate aerodrome(s).~~

CODE/ Aircraft address (expressed in the form of an alphanumeric code of six hexadecimal characters) when required by the appropriate ATS authority. Example: “F00001” is the lowest aircraft address contained in the specific block administered by ICAO.

DLE/ Enroute delay or holding, insert the significant point(s) on the route where a delay is planned to occur, followed by the length of delay using four figure time in hours and minutes (hhmm).

Example: –DLE/MDG0030

OPR/ ICAO designator or name of the aircraft operating agency, if different from the aircraft identification in item 7.

ORGN/ The originator’s 8 letter AFTN address or other appropriate contact details, in cases where the originator of the flight plan may not be readily identified, as required by the appropriate ATS authority.

Note.— In some areas, flight plan reception centres may insert the ORGN/ identifier and originator’s AFTN address automatically.

PER/ Aircraft performance data, indicated by a single letter as specified in the *Procedures for Air Navigation Services — Aircraft Operations* (PANS-OPS, Doc 8168), *Volume I — Flight Procedures*, if so prescribed by the appropriate ATS authority.

ALTN/ Name of destination alternate aerodrome(s), if ZZZZ is inserted in Item 16. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location in LAT/LONG or bearing and distance from the nearest significant point, as described in DEP/ above.

RALT/ ICAO four letter indicator(s) for en-route alternate(s), as specified in Doc 7910, *Location Indicators*, or name(s) of en-route alternate aerodrome(s), if no indicator is allocated. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location in LAT/LONG or bearing and distance from the nearest significant point, as described in DEP/ above.

TALT/ ICAO four letter indicator(s) for take-off alternate, as specified in Doc 7910, *Location Indicators*, or name of take-off alternate aerodrome, if no indicator is allocated. For aerodromes not listed in the relevant Aeronautical Information Publication, indicate location in LAT/LONG or bearing and distance from the nearest significant point, as described in DEP/ above.

RIF/ The route details to the revised destination aerodrome, following by the ICAO four-letter location indicator of the aerodrome. The revised route is subject to reclearance in flight.

Examples:–RIF/DTA HEC KLAX
–RIF/ESP G94 CLA YPPH

RMK/ Any other plain language remarks when required by the appropriate ATS authority or deemed necessary.

Examples:–0
–STS/MEDEVAC
–EET/015W0315 020W0337 030W0420 040W0502
–STS/ONE ENG INOP
–DAT/S

...

Field Type 22 — Amendment

FIELD TYPE 22

<i>Previous type of field or symbol</i>	<i>This type of field is used in</i>	<i>Next type of field or symbol</i>
16	CHG	*22 or 18
16	CDN	**22 or)

* Indicates that further fields of this type may be added

...

RULES FOR THE COMPOSITION OF ATS MESSAGES

(See Sections 1.3 to 1.8 of this Appendix)

...

STANDARD ATS MESSAGES AND THEIR COMPOSITION

DESIGNATOR	Other information
MESSAGE TYPE			18
Alerting		ALR	
Radiocommunication failure		RCF	
Filed flight plan		FPL	
Delay		DLA	18
Modification		CHG	18
Flight plan cancellation		CNL	18
Departure		DEP	18
Arrival		ARR	
Current flight plan		CPL	
Estimate		EST	
Coordination		CDN	
Acceptance		ACP	
Logical acknowledgement message		LAM	
Request flight plan		RQP	18
Request supplementary flight plan		RQS	18
Supplementary flight plan		SPL	

...

The expression of position or route

The following alternative data conventions shall be used for the expression of position or route:

...

- (e) 2 or 3 to 5 characters being the coded identification of a ~~navigation aid (normally a VOR)~~ significant point, followed by 3 decimal numerics giving the bearing from the point in degrees magnetic followed by 3 decimal numerics giving the distance from the point in nautical miles. The correct number of numerics is to be made up, where necessary, by insertion of zeros, e.g. a point at 180° magnetic at a distance of 40 nautical miles from VOR "FOJ" would be expressed as "FOJ180040".

...

2. Examples of ATS messages

...

2.2 Emergency messages**2.2.1 Alerting (ALR) message**

2.2.1.1 Composition

...

–

9
Type of aircraft and wake turbulence category

 –

10
Equipment and capabilities

...

16
Destination aerodrome and total estimated elapsed time, destination alternate aerodrome(s)

...

2.2.1.2 Example

The following is an example of an alerting message relating to an uncertainty phase, sent by Athens Approach Control to Belgrade Centre and other ATS units, in respect of a flight from Athens to Munich.

```
(ALR-INCERFA/LGGGZAZX/OVERDUE
-FOX236/A360024-IM
-C141/H-S/CD
-LGAT1020
-N0430F220 B9 3910N02230W/N0415F240 B9 IVA/N0415F180 B9
-EDDM0227 EDDF
-REG/A43213 EET/LYBE0020 EDMI0133 REG/A43213-OPR/USAF RMK/NO
POSITION REPORT SINCE DEP PLUS 2 MINUTES
-E/0720 P/12 R/UV J/LF D/02 014 C ORANGE A/SILVER C/SIGGAH
-USAF LGGGZAZX 1022 126.7 GN 1022 PILOT REPORT OVER NDB ATS
UNITS ATHENS FIR ALERTED NIL)
```

2.2.1.2.1 Meaning

Alerting message — uncertainty phase declared by Athens due no position reports and no radio contact since two minutes after departure — aircraft identification FOX236 — IFR, military flight — Starlifter, heavy wake turbulence category, equipped with standard communications, navigation and approach aid equipment for the route, SSR transponder with Modes A (4 096 code capability) and C — ADS capability — last assigned Code 3624 — departed Athens 1020 UTC — cruising speed for first portion of route 430 knots, first requested cruising level FL 220 — proceeding on airway Blue 9 to 3910N2230W where TAS would be changed to 415 knots and FL240 would be requested — proceeding on airway Blue 9 to Ivanic Grad VOR where FL 180 would be requested, maintaining TAS of 415 knots and FL240 would be requested — proceeding on airway Blue 9 to Munich, total estimated elapsed time 2 hours and 27 minutes — destination alternate is Frankfurt — aircraft registration A43213 — accumulated estimated elapsed times at the Belgrade and Munich FIR boundaries 20 minutes and 1 hour and 33 minutes respectively — aircraft registration A43213 — the aircraft is operated by the USAF — no position report has been received since 2 minutes after departure — endurance 7 hours and 20 minutes after take-off — 12 persons on board — portable radio equipment working on VHF 121.5 MHz and UHF 243 MHz is carried — life jackets fitted with lights and fluorescein are carried — 2 dinghies with orange covers are carried, have a total capacity for 14 persons — aircraft colour is silver — pilot's name is SIGGAH — operator is USAF


— Athens approach control was the last unit to make contact at 1022 UTC on 126.7 MHz when pilot reported over GN runway locator beacon — Athens approach control have alerted all ATS units within Athens FIR — no other pertinent information.

...

2.3 Filed flight plan and associated update messages

2.3.1 Filed flight plan (FPL) message

2.3.1.1 Composition

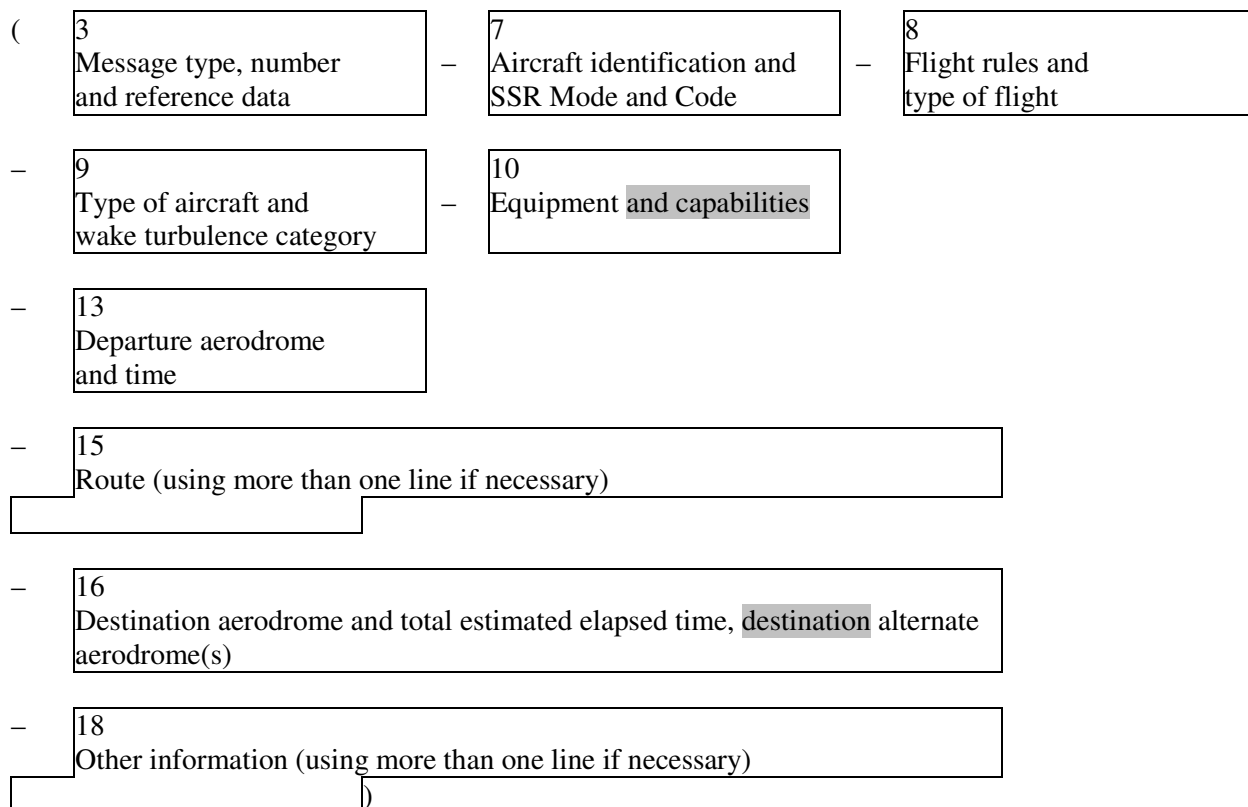

2.3.1.2 Example

The following is an example of a filed flight plan message sent by London Airport to Shannon, Shanwick and Gander Centres. The message may also be sent to the London Centre or the data may be passed to that centre by voice.


```
(FPL-TPRACA101-IS
-B707MB773/H-CHOPV/CD
-EGLL1400
-N0450F310 G1-UGH9 UL9 STU285036/M082F310 UG1-UL9 52N015W LIMRI
52N020W 52N030W 50N040W 49N050W
-CYQX0455 CYYR
-EET/EINNS0026 EGGX0111 020W0136 CYQX0228 040W0330 050W0415 SEL/FJEL)
```

2.3.1.2.1 *Meaning*

Filed flight plan message — aircraft identification ~~TPRACA~~101 — IFR, scheduled flight — a Boeing 707, ~~medium~~777-300, heavy wake turbulence category equipped with Loran C, HF RTF, VOR, ~~Doppler~~, VHF RTF and SSR transponder with Modes A (4 096 code capability) and C — ~~ADS capability~~ — departure aerodrome is London, estimated off-block time 1400 UTC — cruising speed and requested flight level for the first portion of the route are 450 knots and FL 310 — the flight will proceed on Airways ~~Green-1~~Lima 9 and Upper ~~Green-1~~Lima 9 to a point bearing 285 degrees magnetic and 36 NM from the Strumble VOR. From this point the flight will fly at a constant Mach number of .82, proceeding on Upper ~~Green-1~~Lima 9 to 52N15W LIMRI; then to 52N20W; to 52N30W; to 50N40W; to 49N50W; to destination Gander, total estimated elapsed time 4 hours and 55 minutes — destination alternate is Goose Bay — captain has notified accumulated estimated elapsed times at significant points along the route, they are at the Shannon FIR boundary 26 minutes, at the Shanwick Oceanic FIR boundary 1 hour and 11 minutes, at 20W 1 hour and 36 minutes, at the Gander Oceanic FIR boundary 2 hours and 28 minutes, at 40W 3 hours and 30 minutes and at 50W 4 hours and 15 minutes — SELCAL code is FJEL.

2.3.2 *Modification (CHG) message*

2.3.2.1 *Composition*

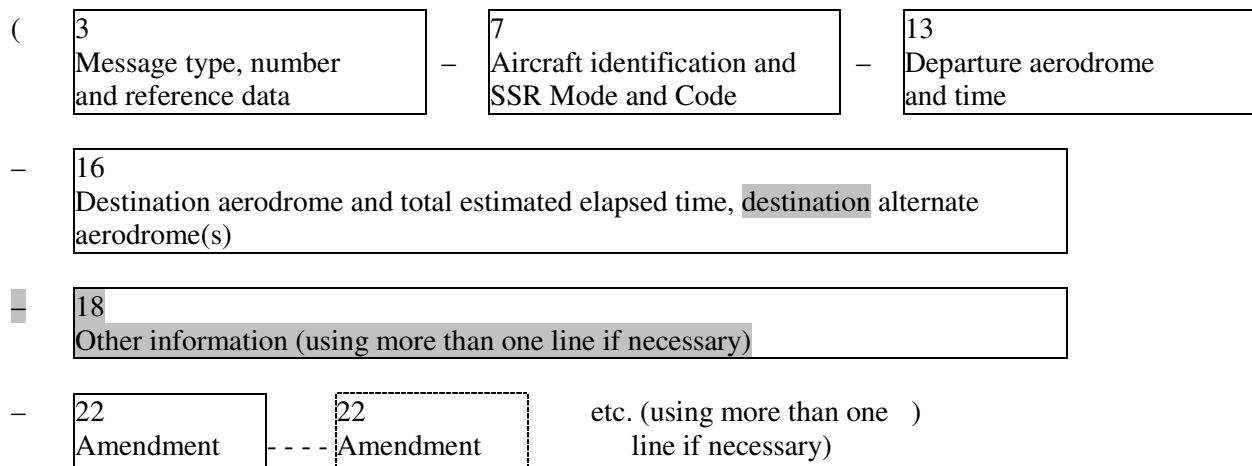

2.3.2.2 *Example*

The following is an example of a modification message sent by Amsterdam Centre to Frankfurt Centre correcting information previously sent to Frankfurt in a filed flight plan message. It is assumed that both centres are computer-equipped.

(CHGA/F016A/F014-GABWE/A2173-EHAM0850-EDDF-~~DOF/080122~~-8/I-16/EDDN)

2.3.2.2.1 *Meaning*

Modification message – Amsterdam and Frankfurt computer unit identifiers A and F, followed by serial number (016) of this message sent by Amsterdam, repeat of computer unit identifiers followed by serial number (014) of the related filed flight plan message – aircraft identification GABWE, SSR Code 2173 operating in Mode A, en route from Amsterdam EOBT0850 to Frankfurt date of flight 22 Jan 2008 – Field Type 8 of the related filed flight plan message is corrected to IFR – Field Type 16 of the related filed flight plan is corrected, the new destination is Nürnberg.

18
Other information (using more than one line if necessary)

2.3.4.2 Example

The following is an example of a delay message from a departure aerodrome, or from a parent unit handling communications for a departure aerodrome, to each addressee of a filed flight plan message.


(DLA-KLM671-LIRF0900-LYDU-0)

2.3.4.2.1 Meaning

Delay message – aircraft identification KLM671 – revised estimated off-block time Fiumicino 0900 UTC destination Dubrovnik – no other information.

2.3.5 Departure (DEP) message

2.3.5.1 Composition

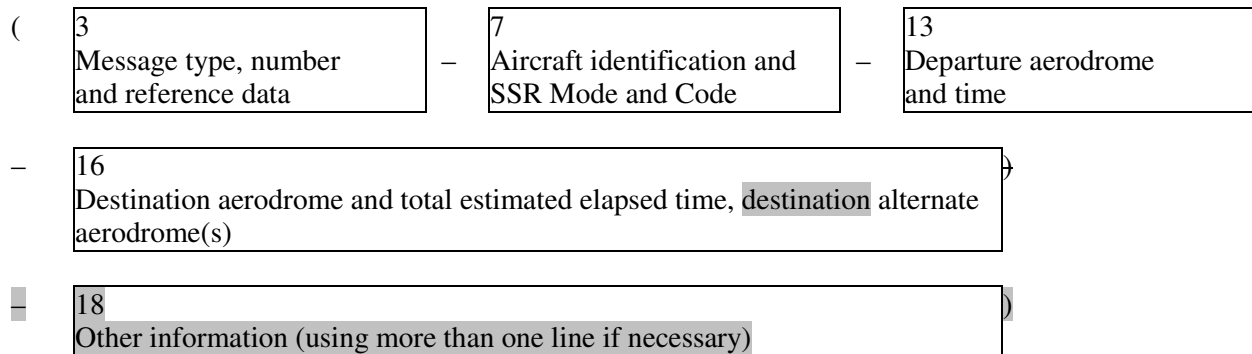

2.3.5.2 Example

The following is an example of a departure message from a departure aerodrome, or from a parent unit handling communications for a departure aerodrome, to each addressee of a filed flight plan message.


(DEP-CSA4311-EGPD1923-ENZV-0)

2.3.5.2.1 Meaning

Departure message – aircraft identification CSA4311 – departed from Aberdeen at 1923 UTC – destination Stavanger – no other information.

2.3.6 Arrival (ARR) message

2.3.6.1 Composition



- | |
|----------------------------|
| 17 |
| Arrival aerodrome and time |

)

2.3.6.2 Example 1

The following is an example of an arrival message sent from the arrival aerodrome (= destination) to the departure aerodrome.

(ARR-CSA406-LHBP-LKPR0913)

2.3.6.2.1 Meaning

Arrival message — aircraft identification CSA406 — departed from Budapest/Ferihegy — landed at Prague/Ruzyně Airport at 0913 UTC.

2.3.6.3 Example 2

The following is an example of an arrival message sent for an aircraft which has landed at an aerodrome for which no ICAO location indicator has been allocated. The SSR Code would not be meaningful.

(ARR-~~HEL13~~HHE13-EHAM-1030 DEN HELDER)


2.3.6.3.1 Meaning

Arrival message aircraft identification ~~HEL13~~HHE13 — departed from Amsterdam — landed at Den Helder heliport at 1030 UTC.

2.4 Coordination messages

2.4.1 Current flight plan (CPL) message

2.4.1.1 Composition

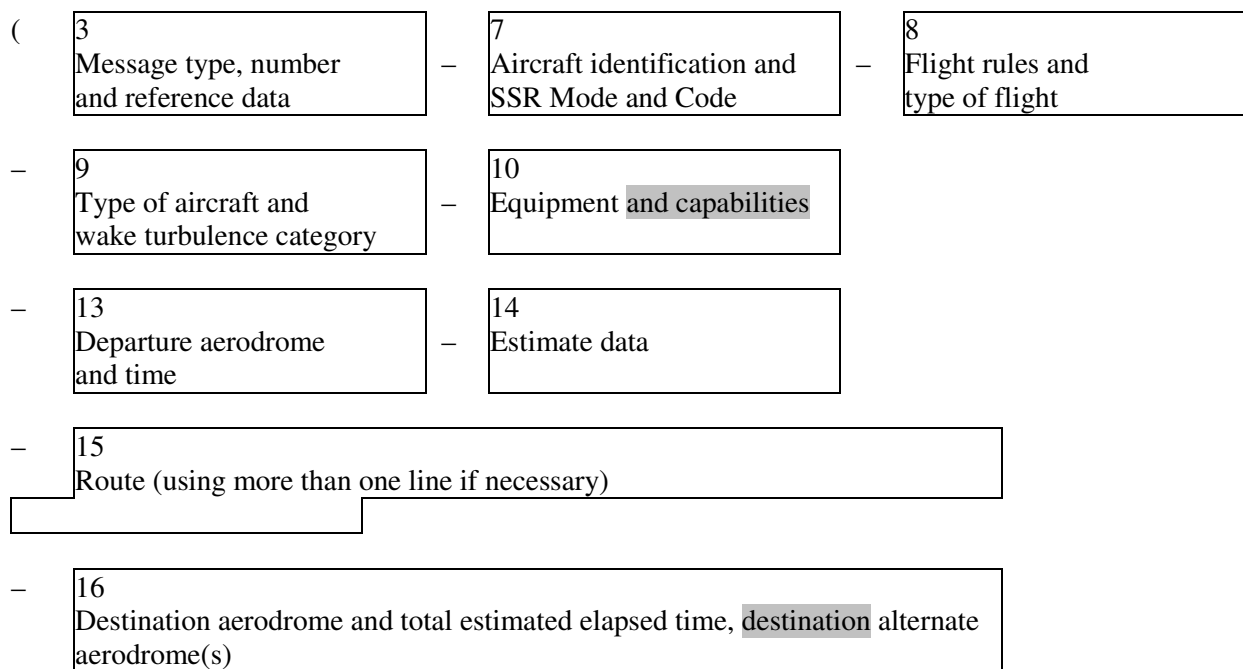

- 18
Other information (using more than one line if necessary)

2.4.1.2 Example 1

The following is an example of a current flight plan message sent from Boston Centre to New York Centre on a flight which is en route from Boston to La Guardia Airport.

(CPL-UAL621/A5120-IS
-DC9A320/M-S/CD
-KBOS-HFD/1341A220A200A
-N0420A220 V3 AGL V445
-KLGA
-0)

2.4.1.3 Example 2

The following is an example of the same current flight plan message, but in this case the message is exchanged between ATC computers.

(CPLBOS/LGA052-UAL621/A5120-IS
-DC9A320/M-S/CD
-KBOS-HFD/1341A220A200A
-N0420A220 V3 AGL V445
-KLGA
-0)

Note.— The messages in Examples 1 and 2 are identical except that the Message Number of Example 2 does not appear in Example 1.


2.4.1.4 Meaning

Current flight plan message [with sending unit identity (BOS) and receiving unit identity (LGA), followed by the serial number of this message (052)] — aircraft identification UAL621, last assigned SSR Code 5120 in Mode A — IFR, scheduled flight — one-DC9A320, medium wake turbulence category, equipped with standard communications, navigation and approach aid equipment for the route and SSR transponder with Modes A (4 096 code capability) and C — ADS capability — departed Boston — the flight is estimated to cross the Boston/New York “boundary” at point HFD at 1341 UTC, cleared by the Boston Centre at altitude 22 000 feet but to be at or above altitude 20 000 feet at HFD — TAS is 420 knots, requested cruising level is altitude 22 000 feet — the flight will proceed on airway V3 to reporting point AGL thence on airway V445 — destination is La Guardia Airport — no other information.

2.4.2 Estimate (EST) message

2.4.2.1 Composition


(3 Message type, number and reference data - 7 Aircraft identification and SSR Mode and Code - 13 Departure aerodrome and time

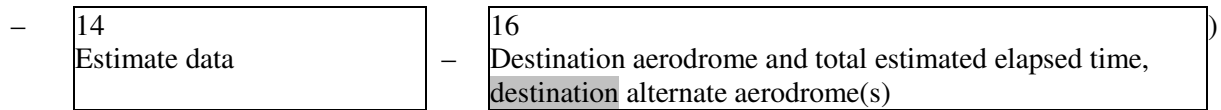

...

2.4.3 *Coordination (CDN) message*


2.4.3.1 *Composition*

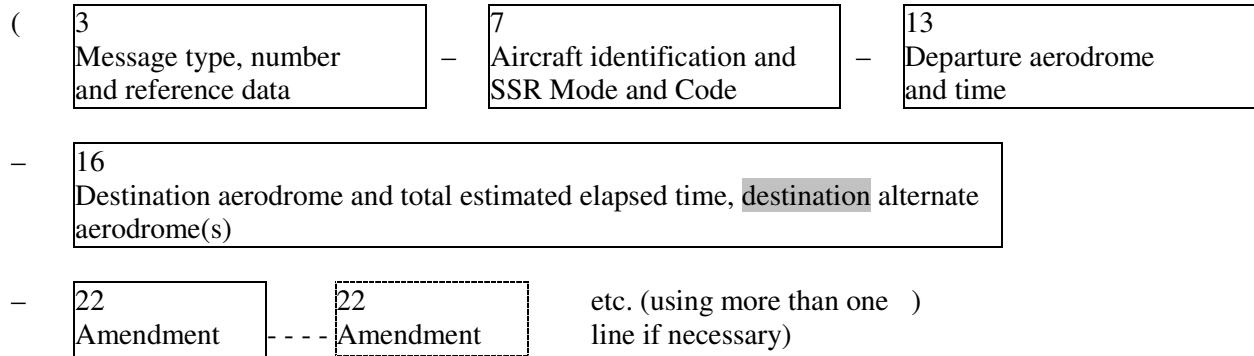

...

2.4.4 *Acceptance (ACP) message*

2.4.4.1 *Composition*

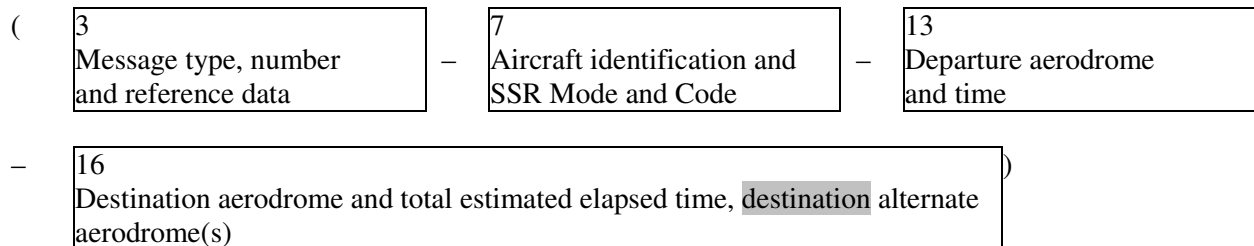


...

2.5 *Supplementary messages*

2.5.1 *Request flight plan (RQP) message*

2.5.1.1 *Composition*

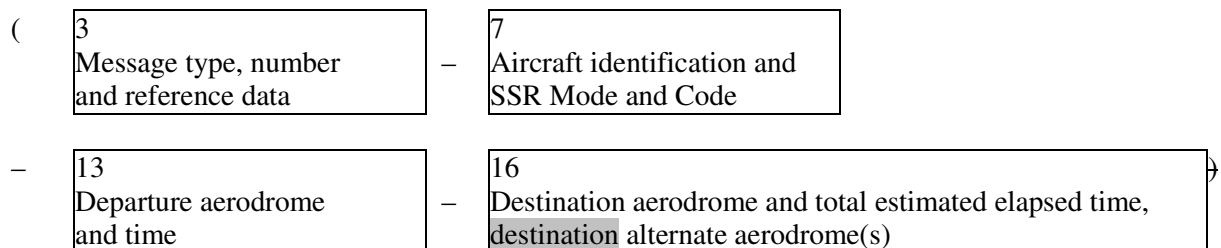

18
Other information (using more than one line if necessary)

2.5.1.2 Example

The following is an example of a request flight plan message sent by a centre to an adjacent centre after receipt of an estimate message, for which no corresponding filed flight plan message had been received previously.


(RQP-PHOEN-EHRD-EDDL-0)

2.5.1.2.1 Meaning

Request flight plan message – aircraft identification PHOEN departed from Rotterdam – destination Düsseldorf – no other information.

2.5.2 Request supplementary flight plan (RQS) message

2.5.2.1 Composition

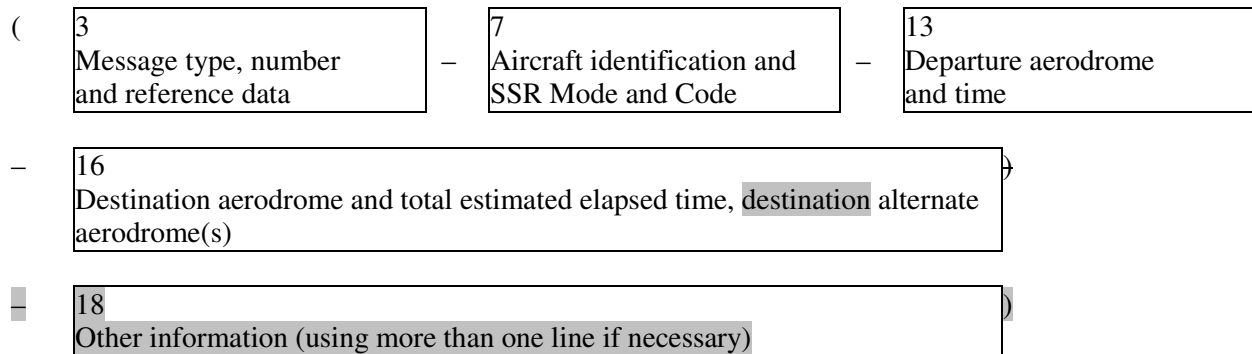

2.5.2.2 Example

The following is an example of a request flight plan message sent by an ATS unit to the ATS unit serving the departure aerodrome requesting information contain in the flight plan form, but not transmitted in the filed or current filed flight plan messages.


(RQS-KLM405/A4046-EHAM-CYMX-0)

2.5.2.2.1 Meaning

Request supplementary flight plan message – aircraft identification KLM405/SSR Code 4046 operating in Mode A – departure aerodrome is Amsterdam – destination aerodrome is Mirabel – no other information.

2.5.3 Supplementary flight plan (SPL) message

2.5.3.1 Composition



- 16
Destination aerodrome and total estimated elapsed time, destination alternate
aerodrome(s)

...

ATTACHMENT B**AMENDMENT TO THE FOREWORD OF THE PANS-ATM**

Add the following at the end of Table A:

<i>Amendment</i>	<i>Source(s)</i>	<i>Subject</i>	<i>Approved Applicable</i>
1	Flight Plan Study Group (FPLSG)	Update the ICAO model flight plan form.	D 15 November 2012

— END —