

Wireless Avionics Intra-Communications (WAIC)

Agenda Item 1.17 Update and Status
on implementing of a regulatory
framework for WAIC



ICAO Regional WRC-15 Preparatory Workshop
Pattaya, Thailand – March 2014

Outline

- **What is WAIC**
- **Why is WAIC Important**
- **Overall Regulatory Process**
 - ITU-R
 - Status of Documents
 - Priority Frequency Bands for Study
 - ICAO, RTCA, EUROCAE
 - Certification of Aircraft
- **Technical Effort**
 - WAIC Technical Characteristics
 - Preliminary Sharing Study Results

What is Wireless Avionics Intra-Communications (WAIC)

- **WAIC is:**
 - Radiocommunication between two or more points on a single aircraft.
 - Integrated wireless and/or installed components to the aircraft.
 - Part of a closed, exclusive network required for operation of the aircraft.
 - Only for safety-related applications.
 - Based on short range radio technology (< 100m).
 - Low maximum transmit power levels of 10mW for low rate and 50mW for high rate applications
 - Mostly internal - within fuselage/cabin.
- **WAIC does not:**
 - Provide off-board air-to-ground, air-to-satellite, or air-to-air service.
 - Provide communications for passengers or in-flight entertainment.

WAIC and Next Generation of Aircraft

- Aircraft and the RF environment in which they operate are evolving.
- In striving to utilize wireless capabilities, aircraft are on the verge of important technological and design transformations.
- WAIC represents the aviation industry's effort to realize the benefits of wireless technologies for the future generation of aircraft for safety-related functions.
- Goal is to add operational efficiencies and reduce the overall weight of systems; and include the ability to obtain more data from the aircraft systems and surfaces during all phases of flight.
- The objective is to enhance efficiency and reliability while maintaining or improving current required levels of safety.
- The intent is to NOT mandate equipage changes or to require additional costs to airlines.

Importance of WAIC to Airlines




- **Safety Improvements:**
 - Provide dissimilar redundancy
 - Fewer wires means a reduction in connector pin failures, lower risk of cracked insulation & broken conductors.
 - Mesh networking could provide redundancy in emergencies.
- **Environmental Benefits:**
 - Reduced wiring and associated aircraft weight enables less fuel burn.
- **Increased Reliability**
 - Reduce amount of aging wiring
 - Simplify and reduce life-cycle cost of airplane wiring
 - Ability to obtain more data from aircraft systems and surfaces
 - Add new sensors and controls without additional wire routing
- **Provide operational efficiencies and associated cost savings.**
 - To monitor systems and surfaces that currently cannot be monitored without taking the aircraft out of service.

Examples of Potential WAIC Applications


- **Low Data Rate, Interior Applications (LI):**
 - **Sensors:** Cabin Pressure - Smoke Detection - Fuel Tank/Line – Proximity Temperature - EMI Incident Detection - Structural Health Monitoring - Humidity/Corrosion Detection
 - **Controls:** Emergency Lighting - Cabin Functions
- **Low Data Rate, Outside Applications (LO):**
 - **Sensors:** Ice Detection - Landing Gear Position Feedback - Brake Temperature - Tire Pressure - Wheel Speed - Steering Feedback - Flight Controls Position Feedback - Door Sensors Engine Sensors - Structural Sensors
- **High Data Rate, Interior Applications (HI):**
 - **Sensors:** Air Data - Engine Prognostic - Flight Deck/Cabin Crew Images/Video
 - **Comm.:** Avionics Communications Bus - FADEC Aircraft Interface - Flight Deck/Cabin Crew Audio / Video (safety-related)
- **High Data Rate, Outside Applications (HO):**
 - **Sensors:** Structural Health Monitoring
 - **Controls:** Active Vibration Control

Need for WAIC - Complexity of electrical wiring in modern aircraft

A350:
electrical systems
installation

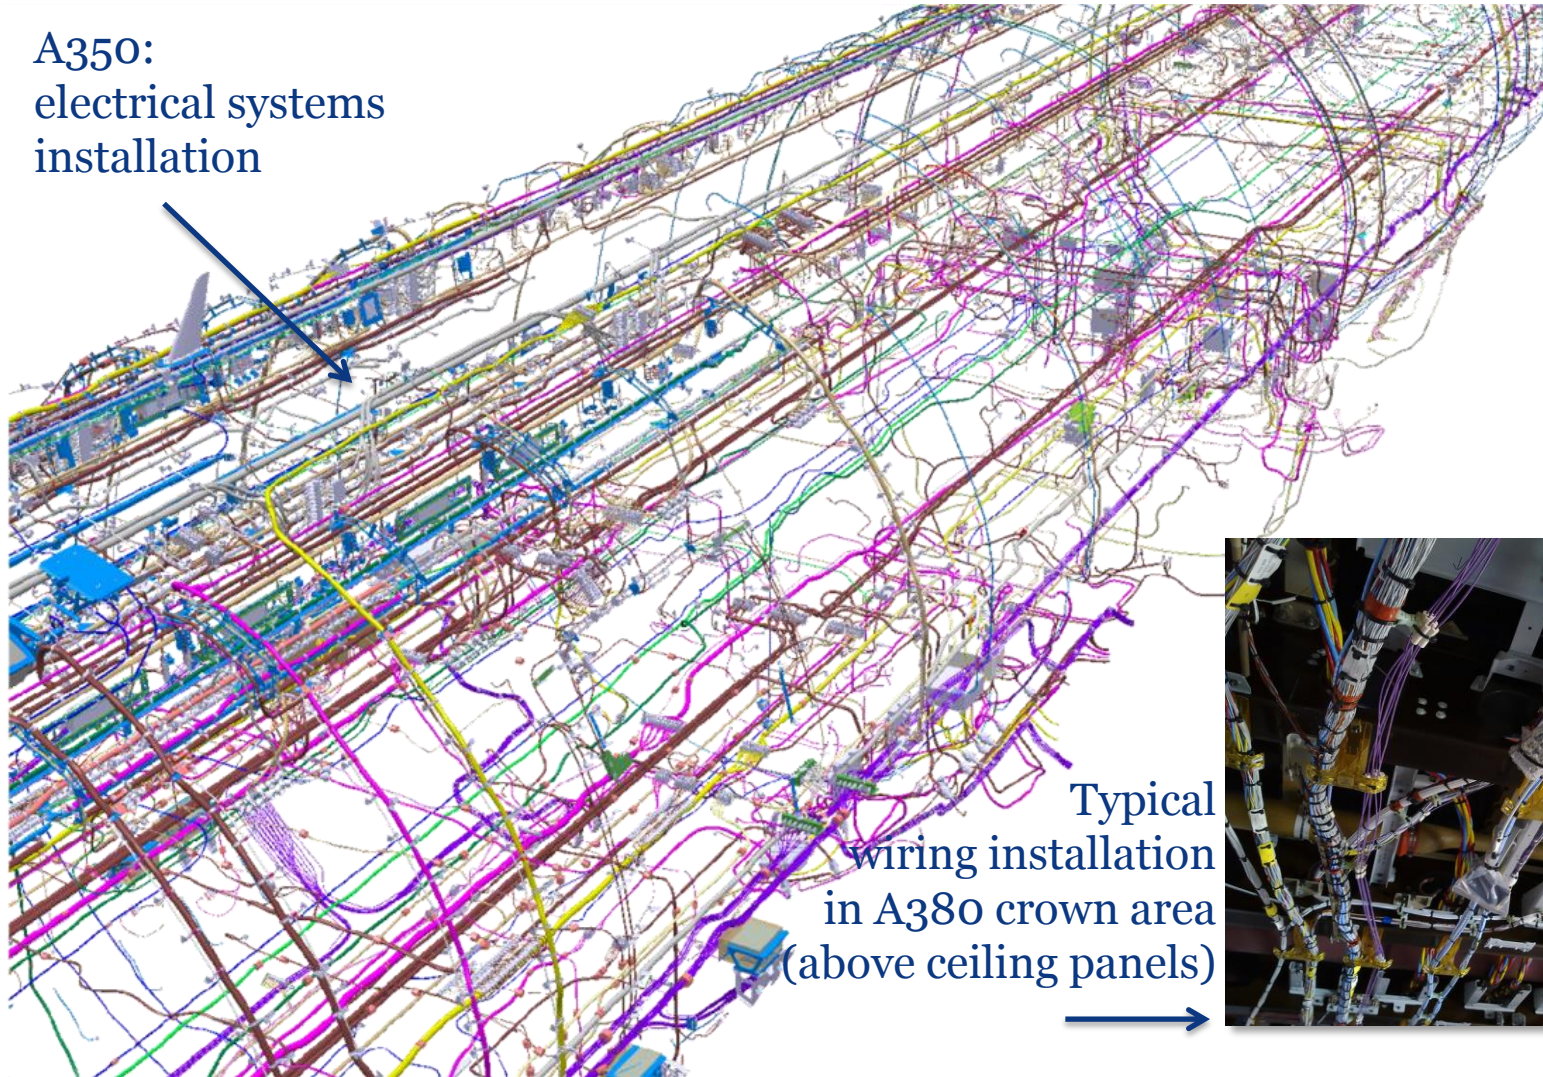

Typical
wiring installation
in A380 crown area
(above ceiling panels)

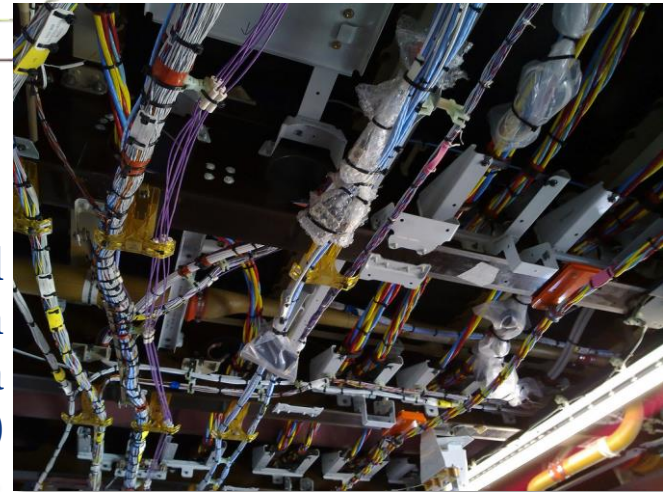

Need for WAIC - Complexity of electrical wiring in modern aircraft




- **Electrical wiring:**
some statistics for the example of the A380-800
 - Total wire count: ~100 000
 - Total wire length: 470 km
 - Total weight of wires: 5 700 kg
 - About 30% of additional weight to fix the harness to the structure

About 30% of electrical wires are potential candidates for a wireless substitute!

Need for WAIC - Reconfigurability

Example: Wireless Supply Unit

- Release of oxygen masks and trigger of oxygen flow
- Passenger Address Function (audio announcement)
- Display providing safety information to the passenger
- Needs to feature flexible installation locations for allowing fast reconfiguration of seat layout

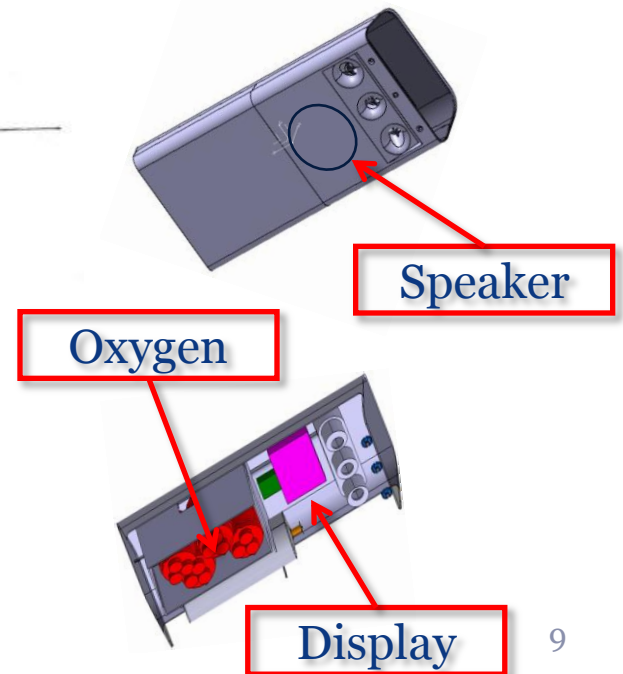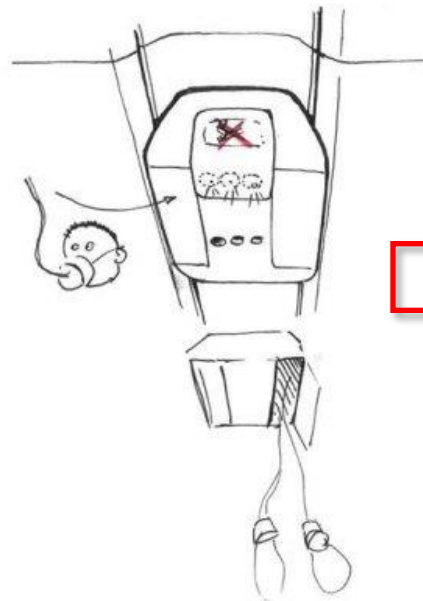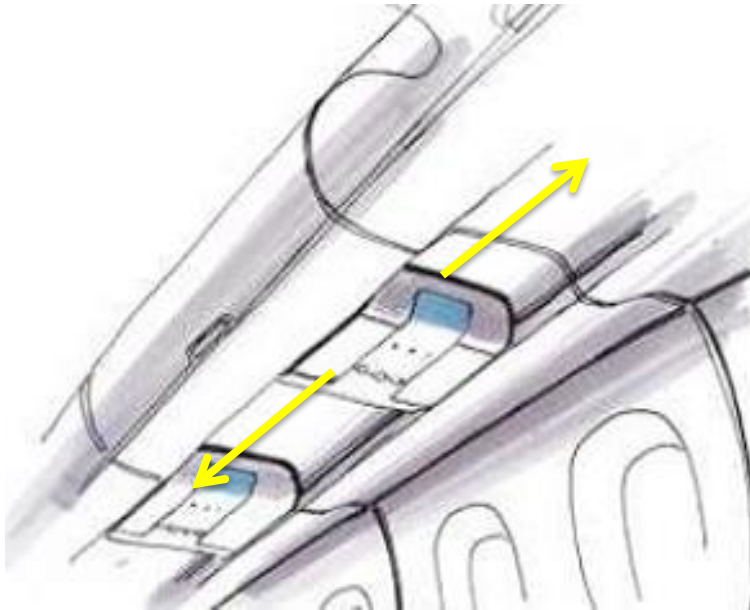

Need for WAIC - Dissimilar Redundancy

Example: Redundant communication paths


- Aircraft wiring typically features dual or triple redundancy.
- Redundant wiring routes in different areas within the aircraft structure mitigate risk of single points of failure
- Wiring routes are segregated to the farthest possible extent allowed by the aircraft geometry

A wireless connection provides a dissimilar redundancy if wires are disconnected.

Need for WAIC - Dissimilar Redundancy

Example: Redundant communication paths (cont'd)

- Route segregation, combined with redundant radio links, provides dissimilar redundancy and mitigates risk of single points of failure

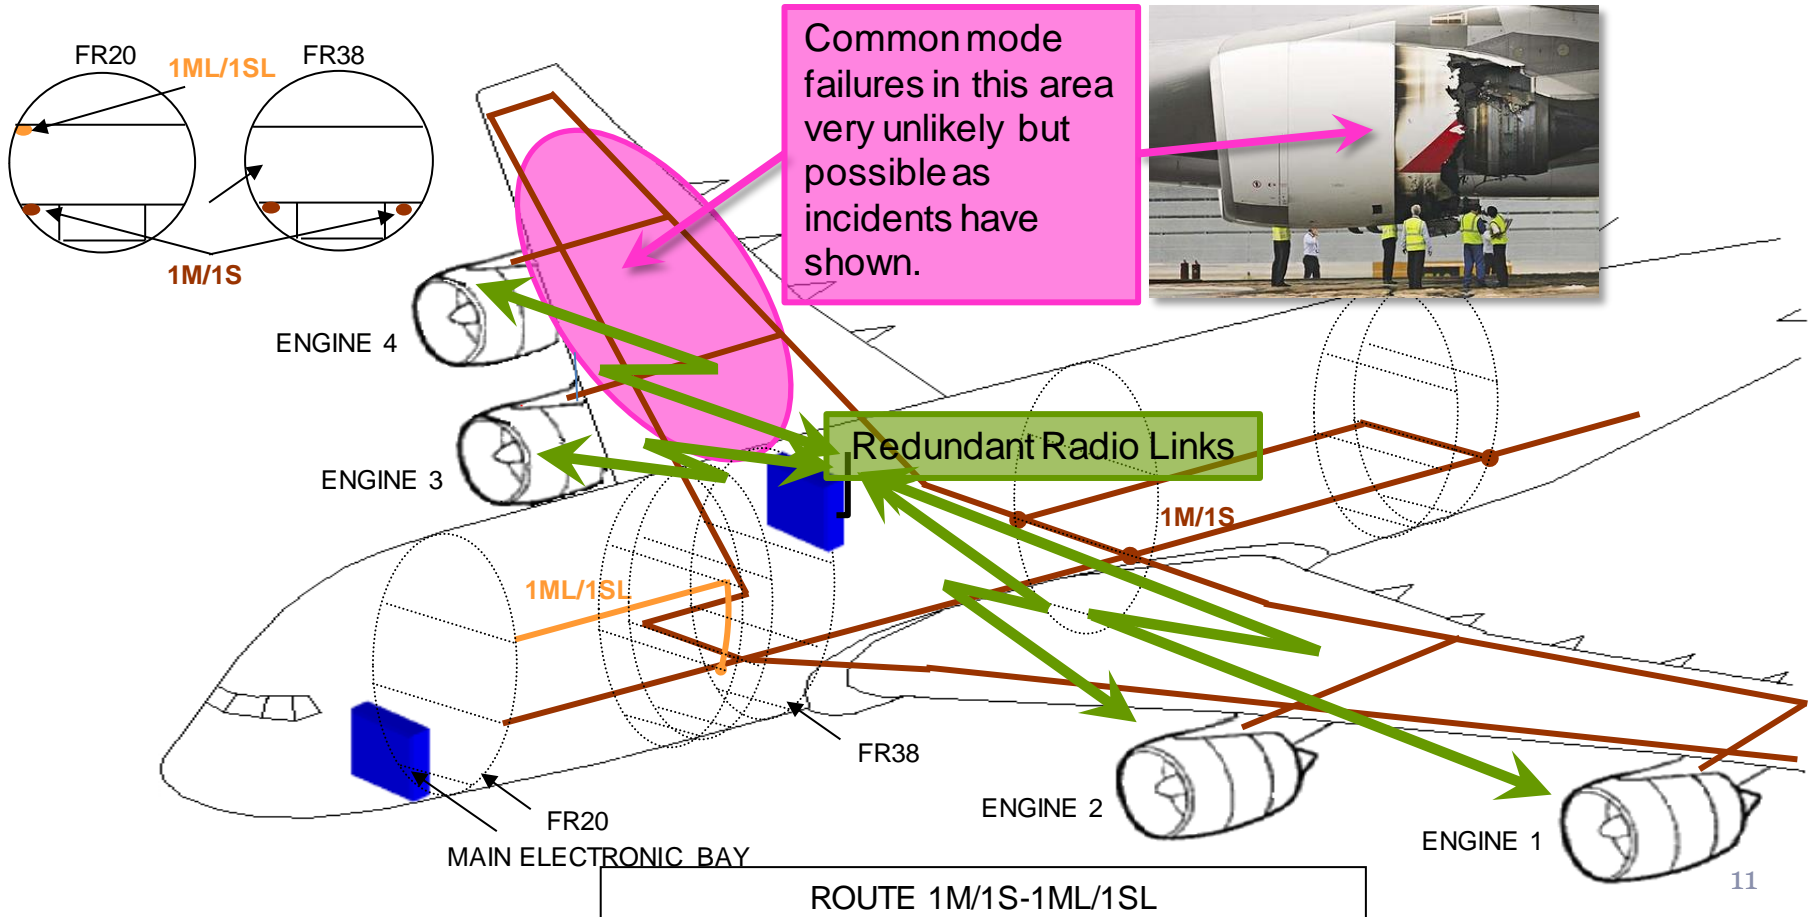

Regulatory Process and Update

- **The safety of the aircraft is the #1 priority!**
- **The ITU is only the first of many regulatory processes.**
 - The first sharing studies were submitted in May 2013 with inputs at November 2013 and additional inputs in May 2014.
- **Updating ICAO, regional spectrum organizations, and industry organizations as information is developed.**
- **ICAO SARPS expected in any aeronautical frequency band in which WAIC is deployed.**
- **RTCA and EUROCAE must also get involved.**
 - EUROCAE process has started.
- **Ultimately, the aircraft certification organization at FAA, etc. must support the safe installation of WAIC on any aircraft.**

Status of ITU Documents

- **CPM Document text is being developed.**
- **Aviation Band Analysis Document**
 - Resolution 423 requires ITU-R to first consider AMS, AM(R)S and ARNS bands below 15.7 GHz, and if spectrum requirements cannot be met, in bands above 15.7 GHz.
 - “Consider” does not mean a detailed technical analysis.
 - The band(s) of “least resistance” is a valid consideration, and probably the most important consideration.
- Studies of bands 2700-2900 MHz, 4200-4400 MHz, 5350-5460 MHz have been submitted to WP 5B.
- Anticipate studies for the 22.5-22.55 GHz and 23.5-23.55 GHz.
- WAIC Recommendation is being developed.

Status of ITU Documents (cont.)

2700-2900 MHz:

- Worldwide allocation to the ARNS
- Used for ground-based radars
- Band is not viable for WAIC systems.
- Not being pursued

4200-4400 MHz:

- Worldwide allocation to the ARNS, and more specifically to only radio altimeters onboard aircraft.
- Radio altimeters and WAIC systems are located on the same aircraft - aircraft manufacturers have full operational control over both WAIC and radio altimeter systems.
- Studies show no negative impact to WAIC or radio altimeters.
- ICAO provided letter of support for and regional consensus developing to support this band for WAIC.

Status of ITU Documents (cont.)

5350-5460 MHz:

- Worldwide allocation to the ARNS
- Used for ground-based radars at high power levels
- Band is not viable for WAIC systems.
- Not going to be pursued

Other Frequency bands:

- Anticipate inputs with respect to the bands 22.5-22.55 GHz and 23.55-23.6 GHz

General Concepts:

- Access to only a portion of a band is acceptable.
- Sharing studies are ongoing.
- Inputs can be expected for the upcoming ITU-R Working Party 5B meeting in May 2014.

Agenda Item 1.17 – Resolution 423

resolves

that WRC-15 consider, based on the results of ITU-R studies, possible regulatory actions, including appropriate aeronautical allocations, to support the implementation of WAIC systems, while taking into account spectrum requirements for WAIC and protection requirements for systems operating in accordance with existing allocations,

invites ITU-R

- 1 to conduct, in time for WRC-15, the necessary studies to determine the spectrum requirements needed to support WAIC systems;
- 2 to conduct sharing and compatibility studies, based on the results of *invites ITU-R 1*, to determine appropriate frequency bands and regulatory actions;
- 3 when conducting studies in accordance with *invites ITU-R 2*, to consider:
 - i) frequency bands within existing worldwide aeronautical mobile service, aeronautical mobile (R) service and aeronautical radionavigation service allocations;
 - ii) additional frequency bands above 15.7 GHz for aeronautical services if spectrum requirements cannot be met in frequency bands studied under *invites ITU-R 3i*),

Technical Effort

- **A lot of technical information about WAIC can be found in ITU-R Report 2197 (2010)**
- **New WAIC Technical Characteristics Document approved as New Report at December 2013 SG-5 meeting. Input Document: SG-5 (51)**
- **Document Contains:**
 - Technical Characteristics grouped by “key” characteristics
 - System architecture
 - Aircraft shielding analysis
 - Bandwidth and data rate requirements
 - Other information necessary to conduct compatibility studies

Technical Information

- **Aircraft Shielding:**
 - Very complex issue: depends on installation location of transmitter and receiver.
 - Fuselage attenuation is a directional property of the aircraft.
 - Statistically, the most common orientation between an aircraft and point on the ground is significantly higher than the average over all of the viewing angles (can exceed 30 dB).
 - Even outside systems experience partial shielding – depending on location.

Conclusion

- **WAIC technology will benefit the airlines and industry.**
- **WAIC will not require avionics systems to be retrofitted.**
- **Safety will be enhanced, not compromised.**
- **ITU, ICAO, APT, ATU, CITEL, CEPT, ASMG, RCC and aviation groups are all being updated.**
- **All groups interested in aviation spectrum issues are welcome to participate.**
- **The ITU effort is the first process that must be started – will only define at a high level the ability for WAIC to use any particular frequency band.**
 - **ICAO, RTCA and EUROCAE efforts start in earnest once there regulatory certainty is achieved or a regulatory solution is more clearly defined.**

Questions?





AEROSPACE VEHICLE SYSTEMS INSTITUTE

THANK YOU