




**Workshop on the Interconnection of Aeronautical  
Surveillance Systems  
(Dakar, Senegal, 14 to 16 April 2014)**






**SSR Mode S Coordination Issues**




**Presented by FX SALAMBANGA  
Regional Officer, CNS WACAF**




# Secondary Surveillance Radar (SSR) Modes A and C

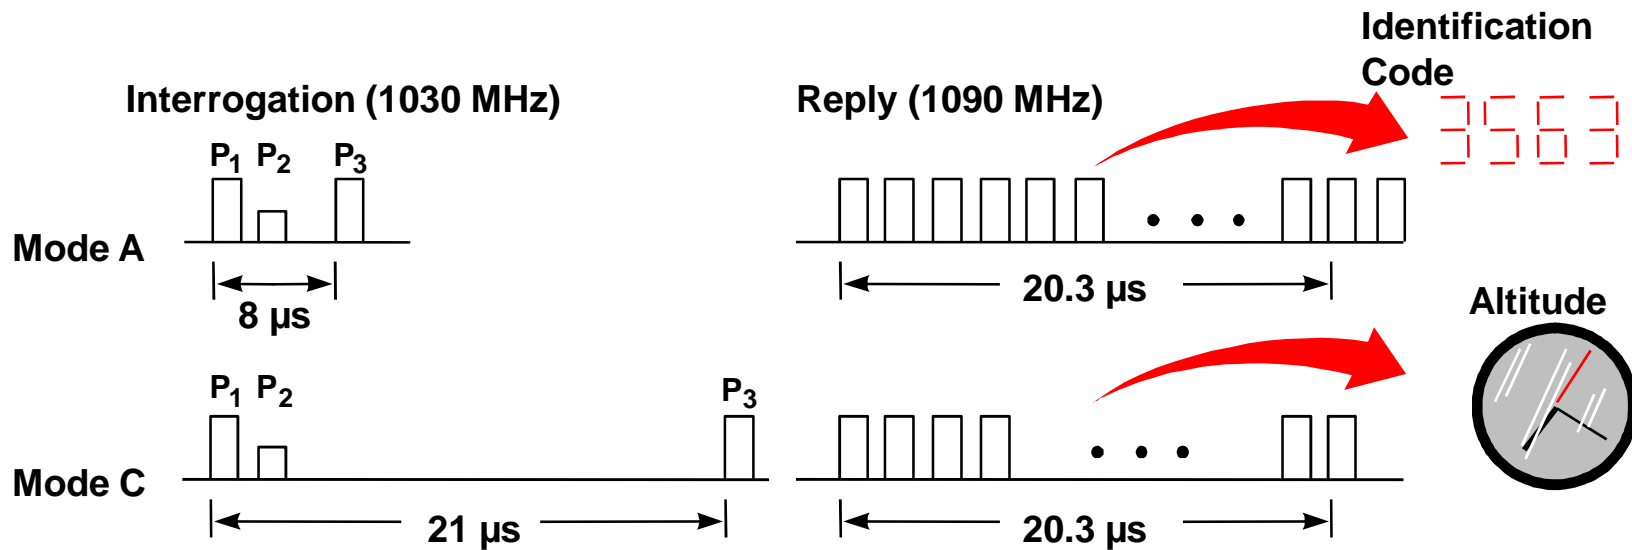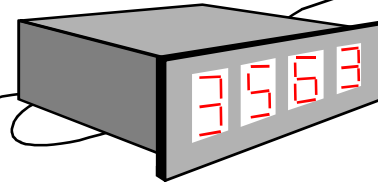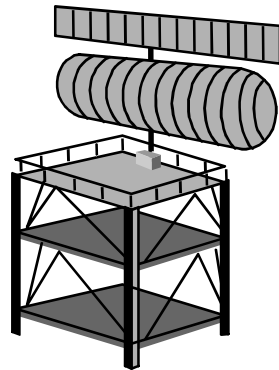





# Synchronous Garbling of Transponder Replies

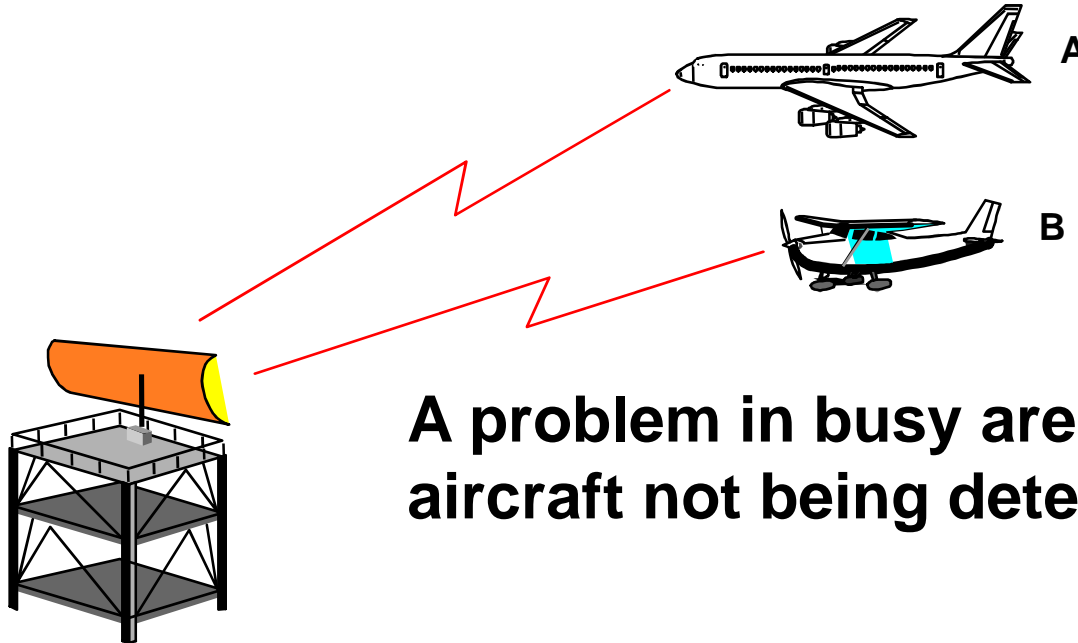


**A problem in busy areas resulting in some aircraft not being detected**

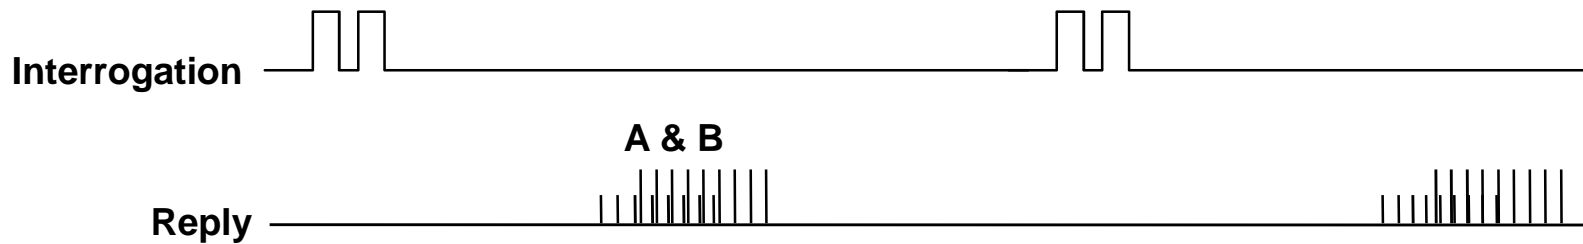

- Replies A & B Garble When Aircraft Are  $< 2$  Miles Apart in Slant Range





# Garbling of interrogations

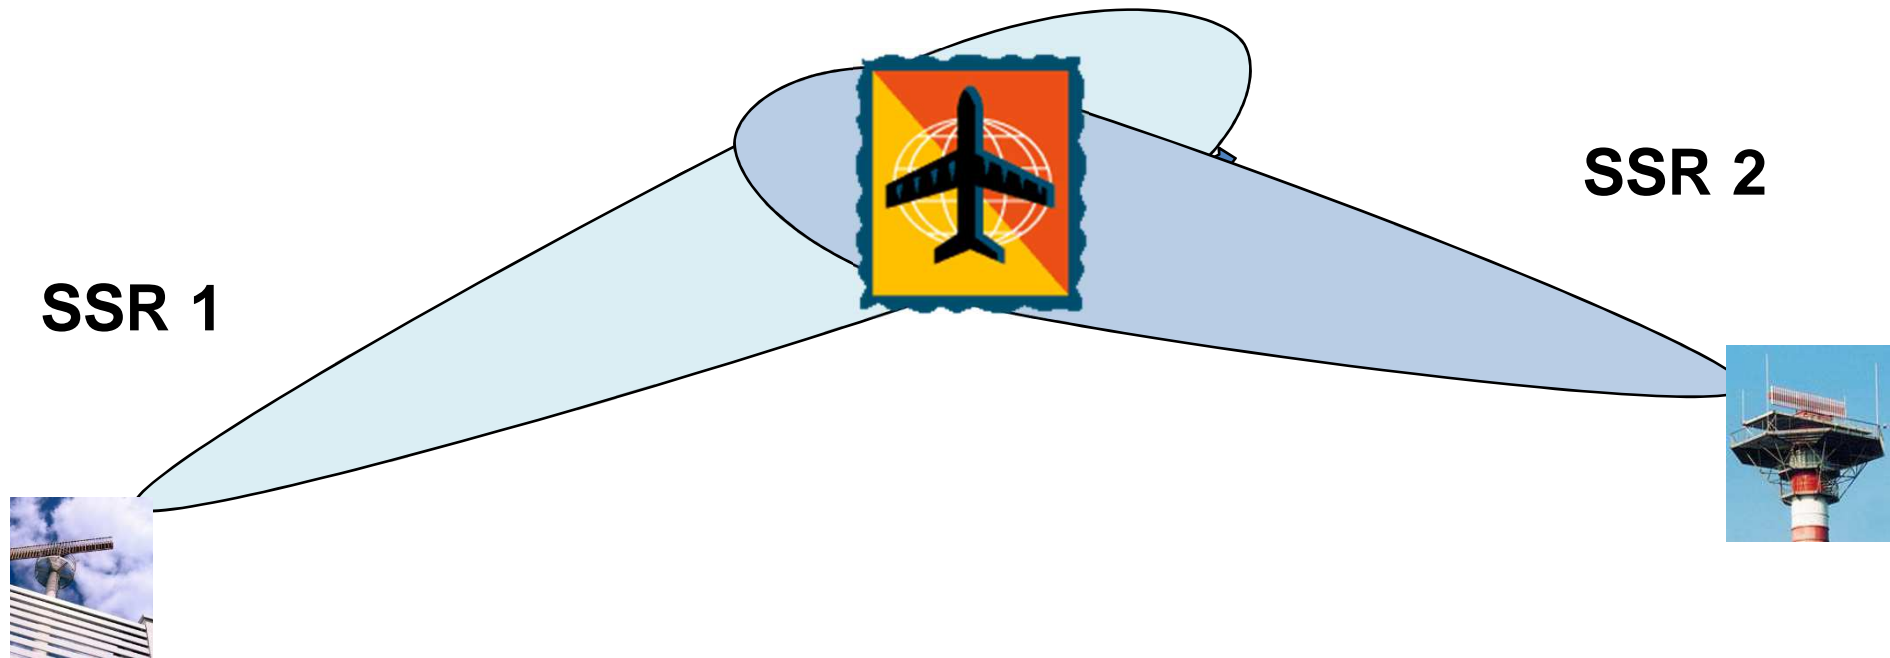



**Adjacent SSRs have the same pulse repetition frequencies (PRFs) – if pulses collide or are too close, the aircraft won't be detected**




## Asynchronous (FRUIT)

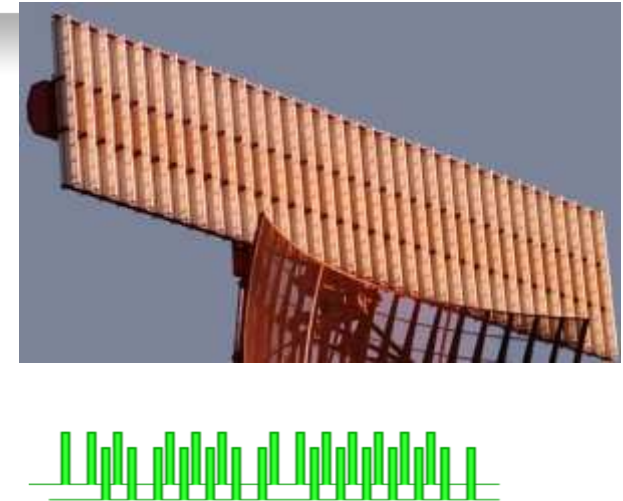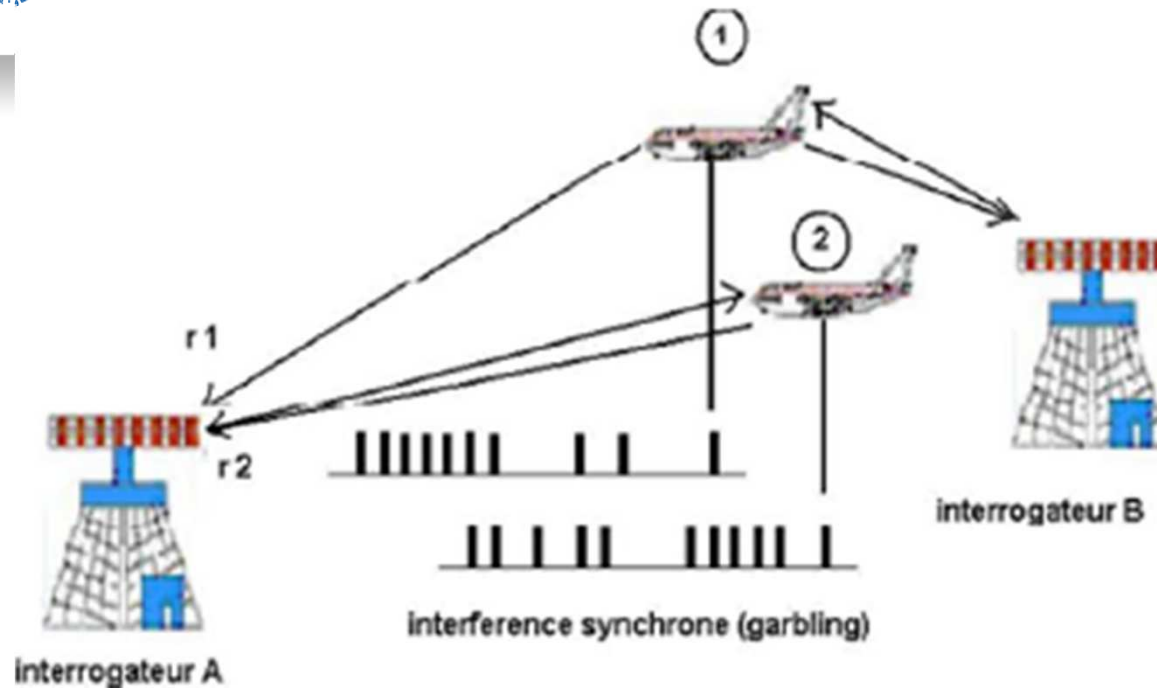

- Station **B** Transmits to *A/C A* and receives a correct synchronous response; although this response is dedicated to B Interrogator **A** also received (**R1**)
- Interrogator A Transmits to *A/C B* and receives a correct synchronous response **R2** but this response is garbled by unsynchronised response **R1**

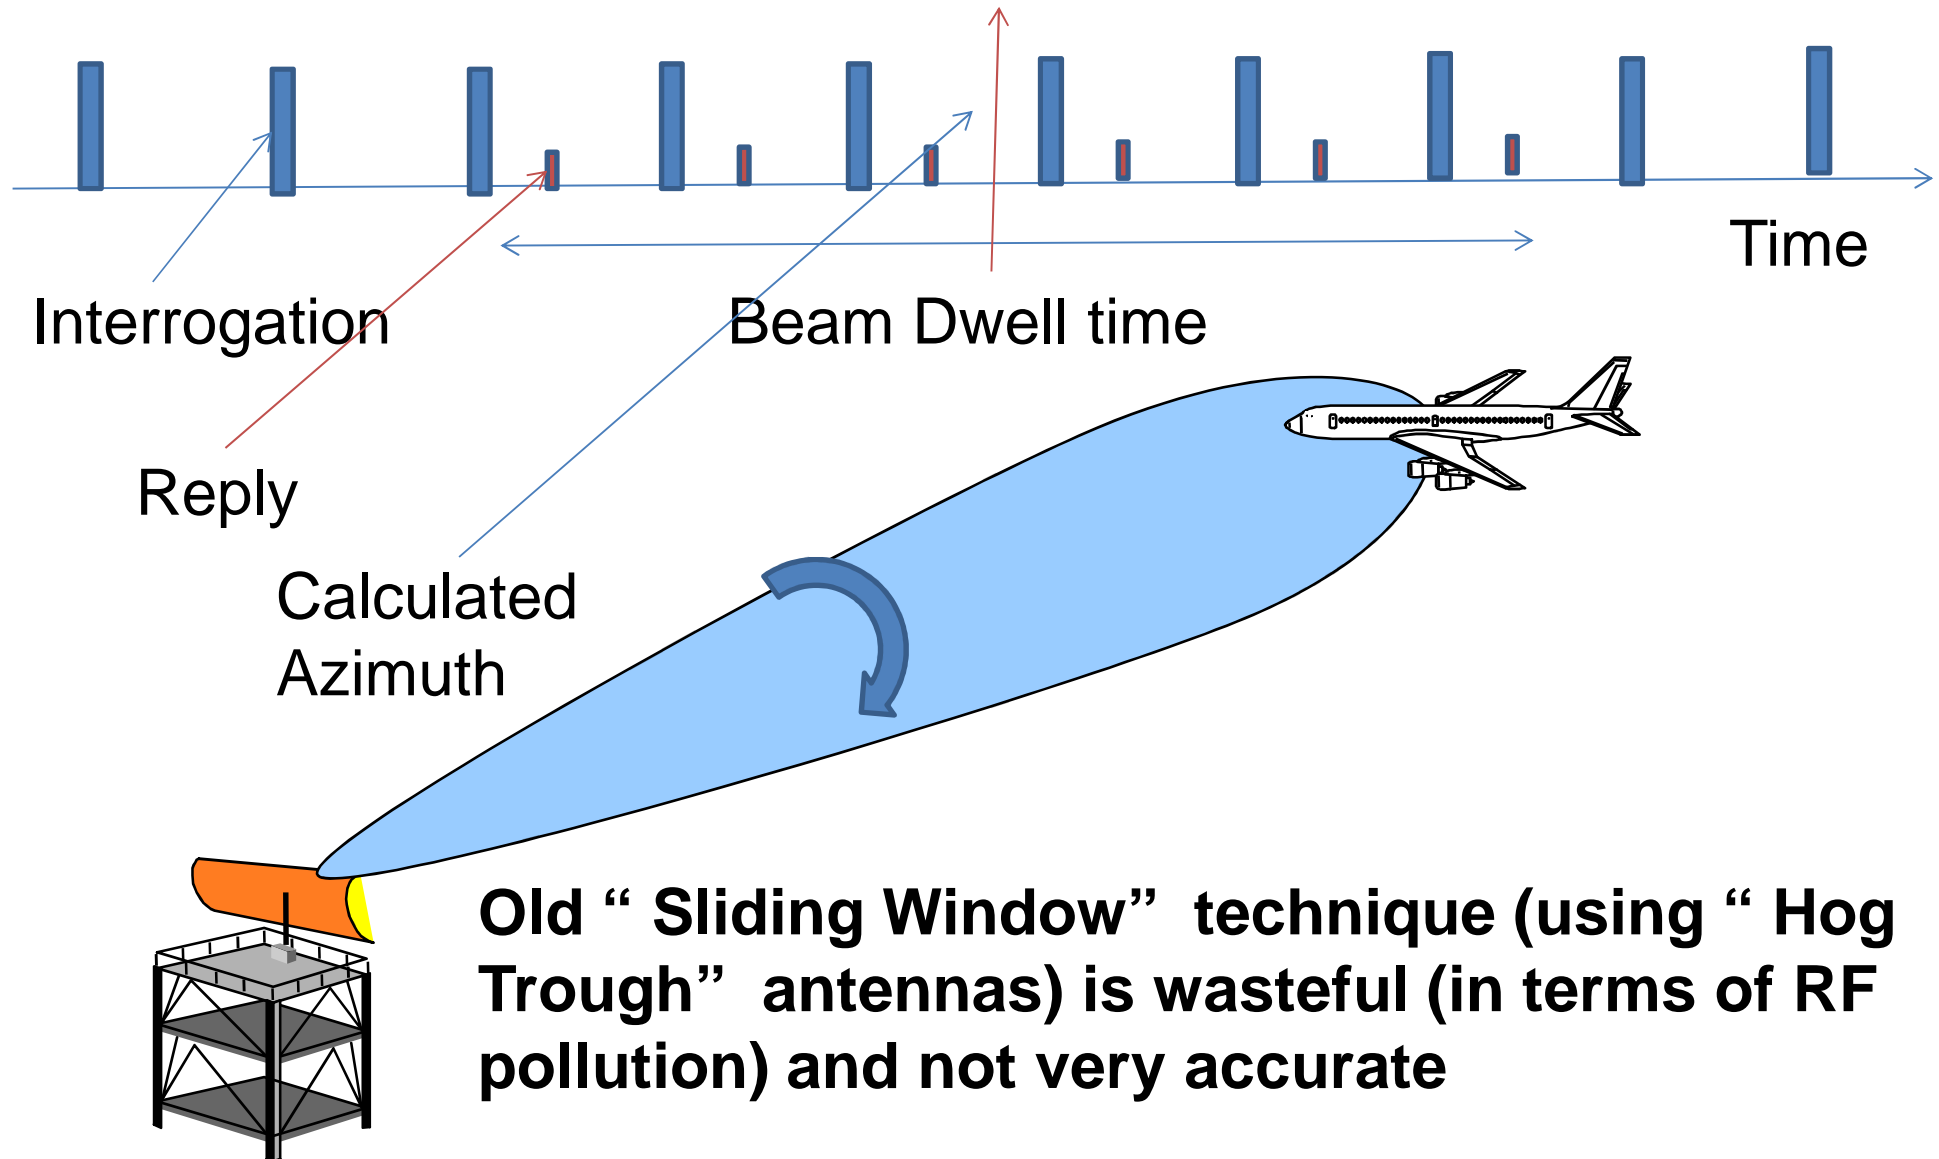





ICAO

UNITING AVIATION

# Monopulse Direction Finding (with Large Vertical Aperture (LVA) antenna)

ATCRBS SENSORS USE  
SLIDING WINDOW DETECTOR


MODE S SENSORS USE  
MONOPULSE TECHNIQUE

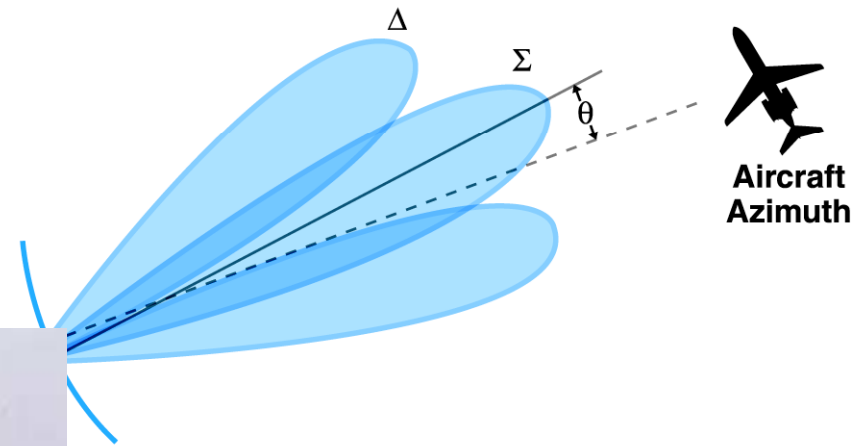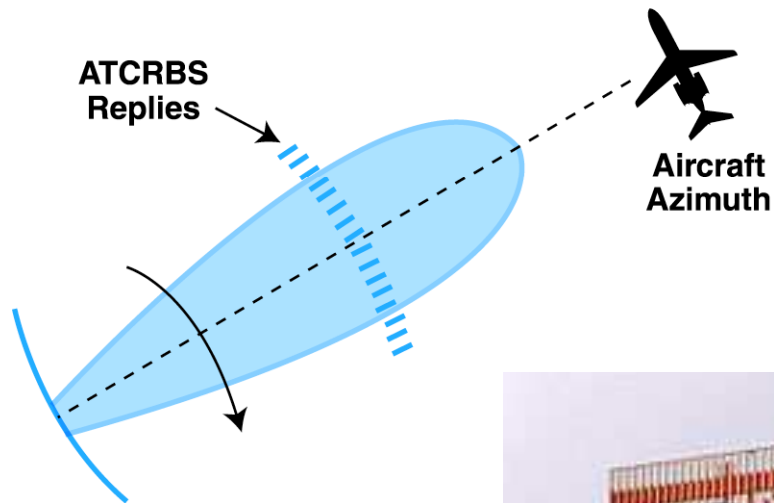


ICS:

- SUSCEPTIBLE TO AZIMUTH SPLITS
- HIGH PULSE REPETITION FREQUENCY

- USES ANTENNA SUM & DIFFERENCE BEAMS TO ESTIMATE AZIMUTH FOR EACH REPLY
- ALLOWS LOWER PULSE REPETITION FREQUENCY




# Mode S and monopulse technique solve the synchronous garble problem

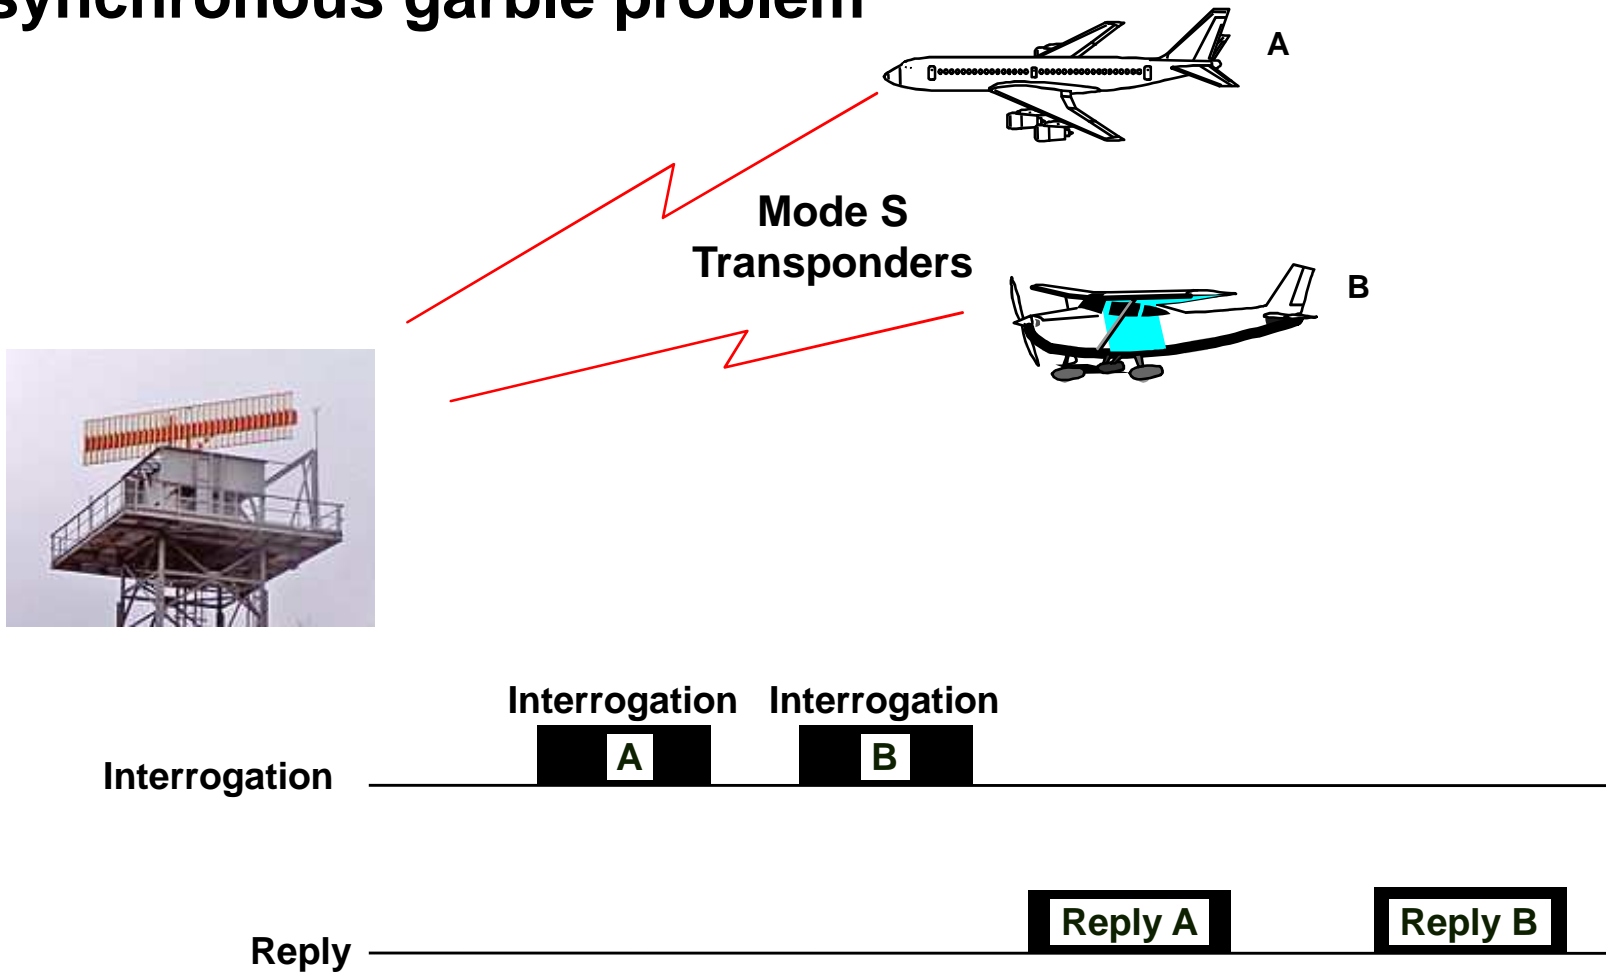

But the interrogator needs to know each aircraft 24 bit address before it can selectively interrogate them





ICAO


UNITING AVIATION



**Acquisition of all aircraft in coverage by the interrogator**

- 1: The interrogator sends out an All-Call signal**
- 2. Each A/C in coverage replies giving its 24 bit address**
- 3. Having acquired all A/c in coverage, the interrogator selectively interrogates every A/C (roll-call)**

**So the same synchronous garble can happen with Mode S as well for A/Cs in close slant range**

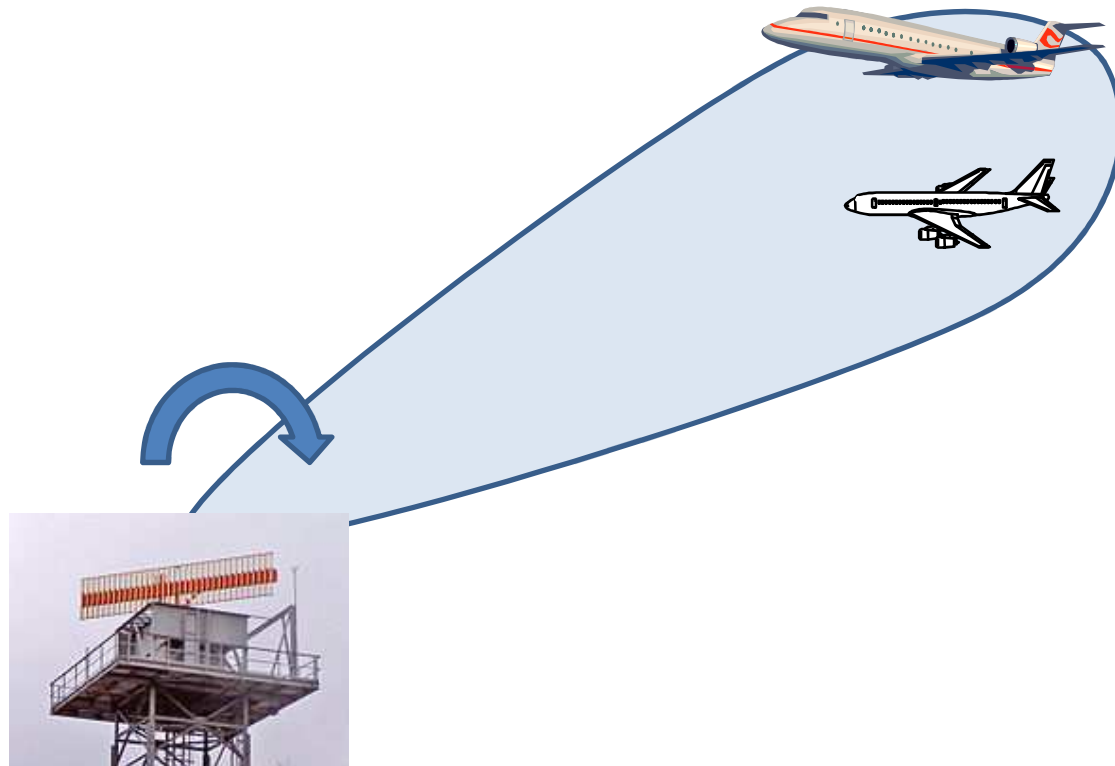

**However, Mode S can do adaptive interrogations. The Stochastic All-call interrogation asks for replies to be sent with a probability of less than 1. Chances are the two A/Cs come up with different probabilities so both don't reply to each interrogation. So both are acquired.**



## ICAO CAPACITY & EFFICIENCY Mode S Acquisition and Lock out

Once an aircraft is “**acquired**” by the ground radar, ideally it should not reply to subsequent **All-call** interrogations.


That is why the interrogator can “**lock out**” an already detected aircraft from replying to further **All-call** interrogations.

However, the aircraft should be able to reply to **All-call** interrogations **from other/adjacent radars**.



This is why each interrogator can have its own “**Interrogator Code (IC)**”.





ICAO

UNITING AVIATION



## Benefits

- \* **immune to garbling/Less RF pollution**
- \* **selective** (addressed interrogations) based on 24-bit aircraft addresses
- \* **relief from Mode A code shortage** (when Aircraft Identification is used)
- \* **Additional information** (e.g. identity and pressure altitude in 25 ft increments)
- \* **uses error detection so data is accurate**
- \* **Offers an A-G data link medium** (up to 112 bits in every signal)





## Advantages of SSR Mode S (over Mode A/C)

Better overall performance and in high density areas, improves the safety of air navigation.


However, Mode S is rather complicated (mainly for the technical personnel). So its use in not-so-high density areas should be carefully considered.

Many parameters need to be properly set/adjusted and often in coordination with adjacent radars.

- \* **Pulse repetition frequency (PRF)**
- \* **Mode interlace pattern (A/C, All-Call A/C/S, All-Call Mode S only, Roll-calls)**
- \* **Interrogator Code (IC)**
- \* **Use of lockout (coverage and protocol)**
- \* **Use of datalink capability**
- \* **Types of transponders in the airspace**

# The Mode S Transponder has 256 registers

Registers (00 to FF<sub>HEX</sub>) contain A/C information

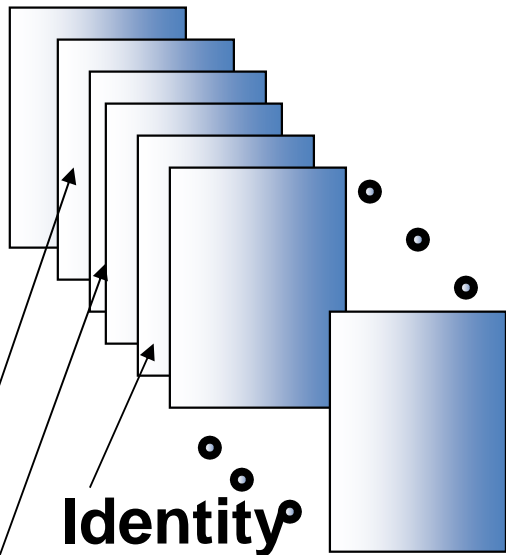

Track and Turn Report

Heading and Speed Report

Mode S transponder



Registers enable downlinking (and broadcasting) of A/C data



**Operational requirements may dictate that some of the registers in the Mode S transponder be fed with aircraft data and their contents be downlinked to ground (as part of replies).**

**Regional mandates are needed to force the appropriate aircraft equipage and configuration. For examples:**

**1. European Elementary Surveillance (ELS) Mandate:**


**- Aircraft identification**

**2. European Enhanced Surveillance (EHS) Mandate:**

**- Selected Altitude, Track Angle Rate, Roll Angle, True Track Angle, Ground Speed, Magnetic Heading, Air Speed and Vertical Rate**



# Compatibility Between Mode A/C and Mode S

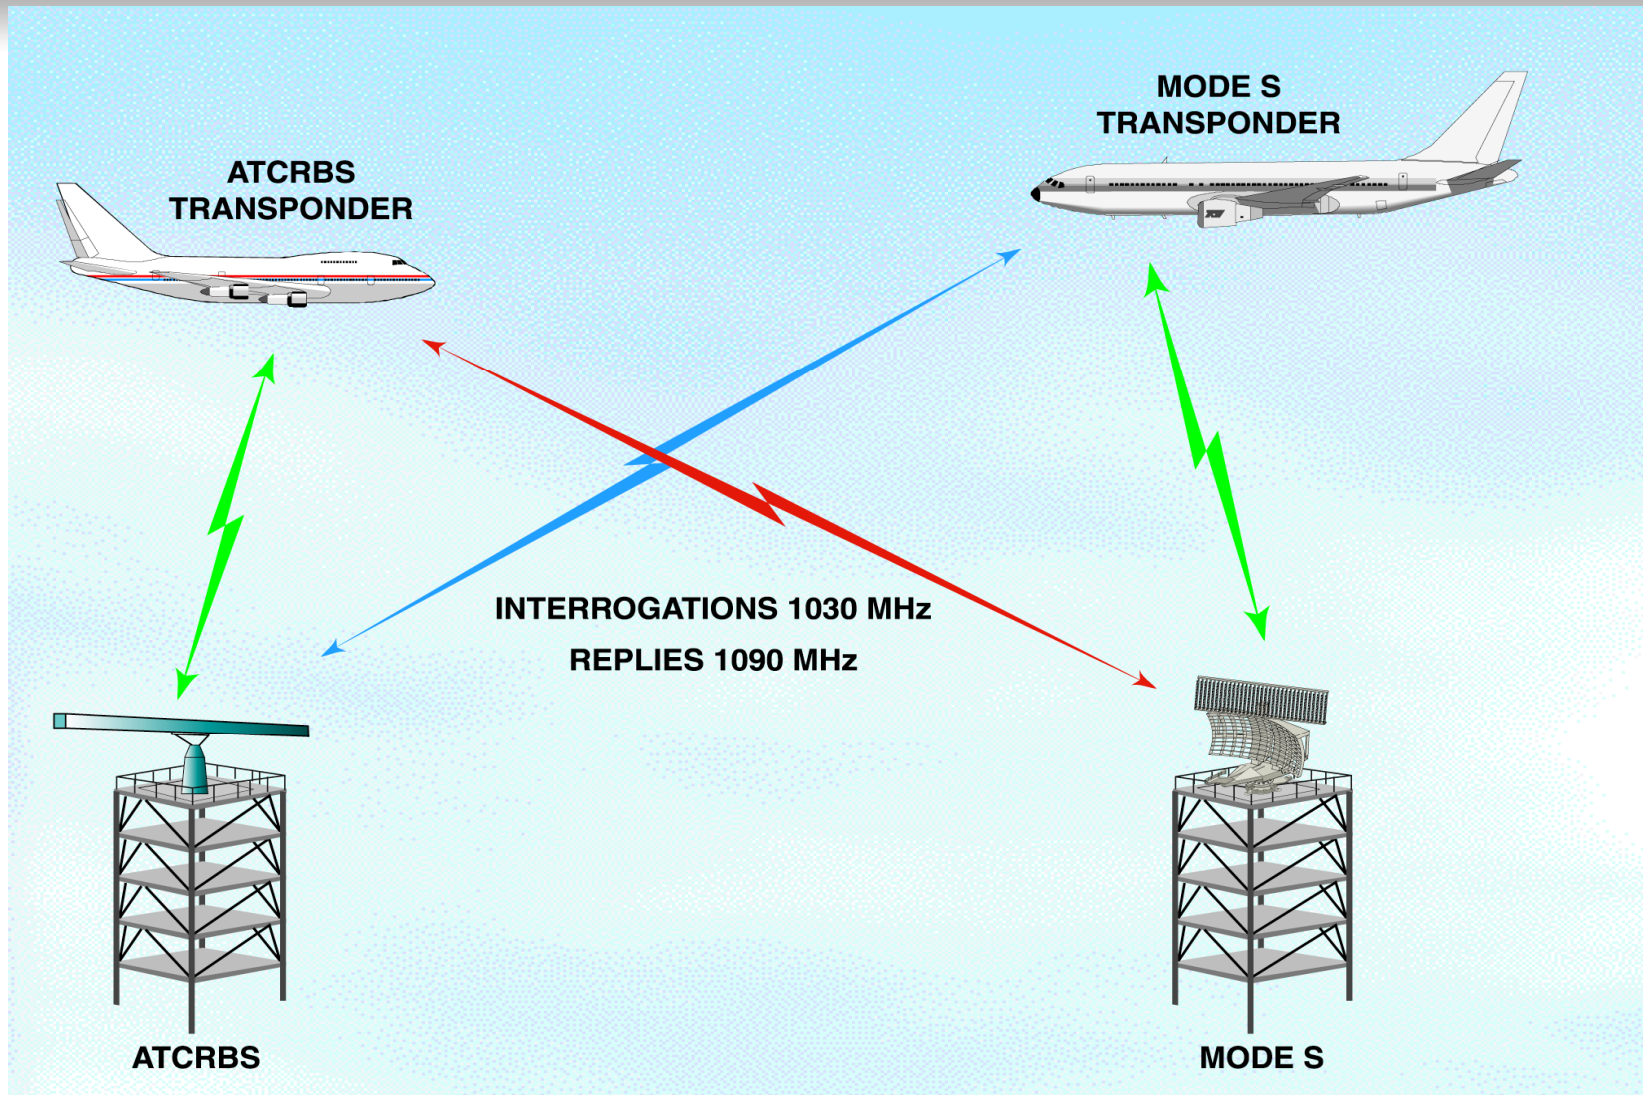





## Lockout and Interrogator Codes

- Once the transponder is on discrete address **roll call**, further response to **All-Calls** would cause interference
- Interrogator commands transponders on its roll call to not reply to **its** All-Calls (**All-Call Lockout**)
  - Lockout command contained in discrete interrogation
  - Times out in 18 seconds
- All-Call lockout is interrogator specific
  - Lockout command specifies 4-bit **Interrogator Identifier (II)** code
  - Transponder replies if not locked out to that interrogator code



## Coordination requirements (Annex 10 Vol. IV)

**Note.**— *In order to permit the efficient operation of ground equipment designed to eliminate interference from unwanted aircraft transponder replies to adjacent interrogators (defruiting equipment), States may need to develop coordinated plans for the assignment of pulse recurrence frequencies (PRF) to SSR interrogators.*

**2.1.2.1.2** The assignment of interrogator identifier (II) codes, where necessary in areas of overlapping coverage, across international boundaries of flight information regions, shall be the subject of regional air navigation agreements.

**2.1.2.1.3** The assignment of surveillance identifier (SI) codes, where necessary in areas of overlapping coverage, shall be the subject of regional air navigation agreements.

**Note.**— *The SI lockout facility cannot be used unless all Mode S transponders within coverage range are equipped for this purpose*




## Interrogator Identifier Codes (IC II) & Lockout

16 Interrogator Identifier (II) codes from 0 to 15

An issue when:

- Adjacent radars have overlapping coverage; and
- Lockout is to be used by any of the radars













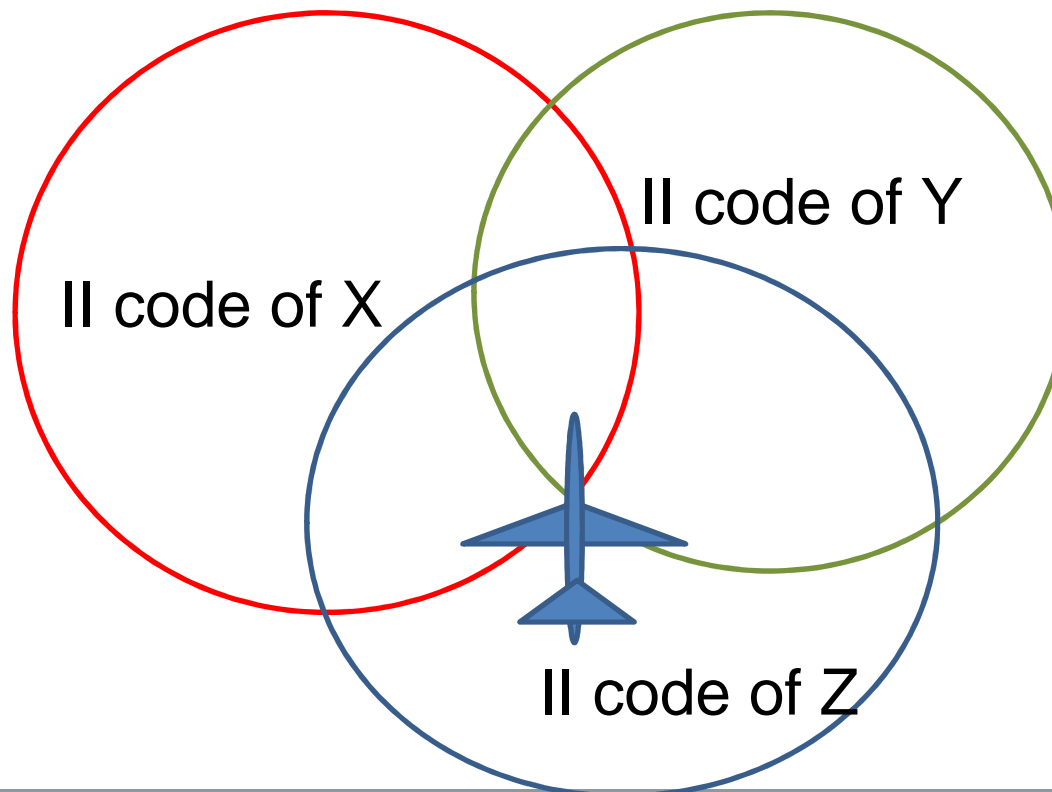


AC locked out by Z  
can still be acquired  
by X and Y once it  
reaches their  
coverage



## Examples of II Assignment

### 16 Interrogator Identifier (II) codes from 0 to 15



**In general, having X radars doesn't equate to X ICs being needed!  
Neither it means a computer tool is needed!**



## SI Codes

- **Interrogator codes are needed for independent operation of adjacent Mode S sensors**
  - **Current II codes not adequate for both civil and military needs**
  - **6-bit Surveillance Identifier (SI) code will provide 63 additional interrogator codes**
- **SI codes now required by Mode S standards and European Mode S mandates**
  - **Will not be used until all aircraft in a region of airspace are equipped !**
  - **Regional coordination a must!**



ICAO

CAPACITY & EFFICIENCY



ICAO


UNITING AVIATION

## Computerizing II code Assignment

- \* A computer tool would however be useful for assigning interrogator codes (interrogator identifier (II) and/or surveillance identifier (SI)) in areas where there are many Mode S radars with overlapping coverage (like the areas shown in the next two slides)**
- \* In such areas, a single body would be better suited to assign the codes (and to look after other Mode S issues) in coordination with individual States**




## A Real Example: Mode S Radars In Saudi Arabia

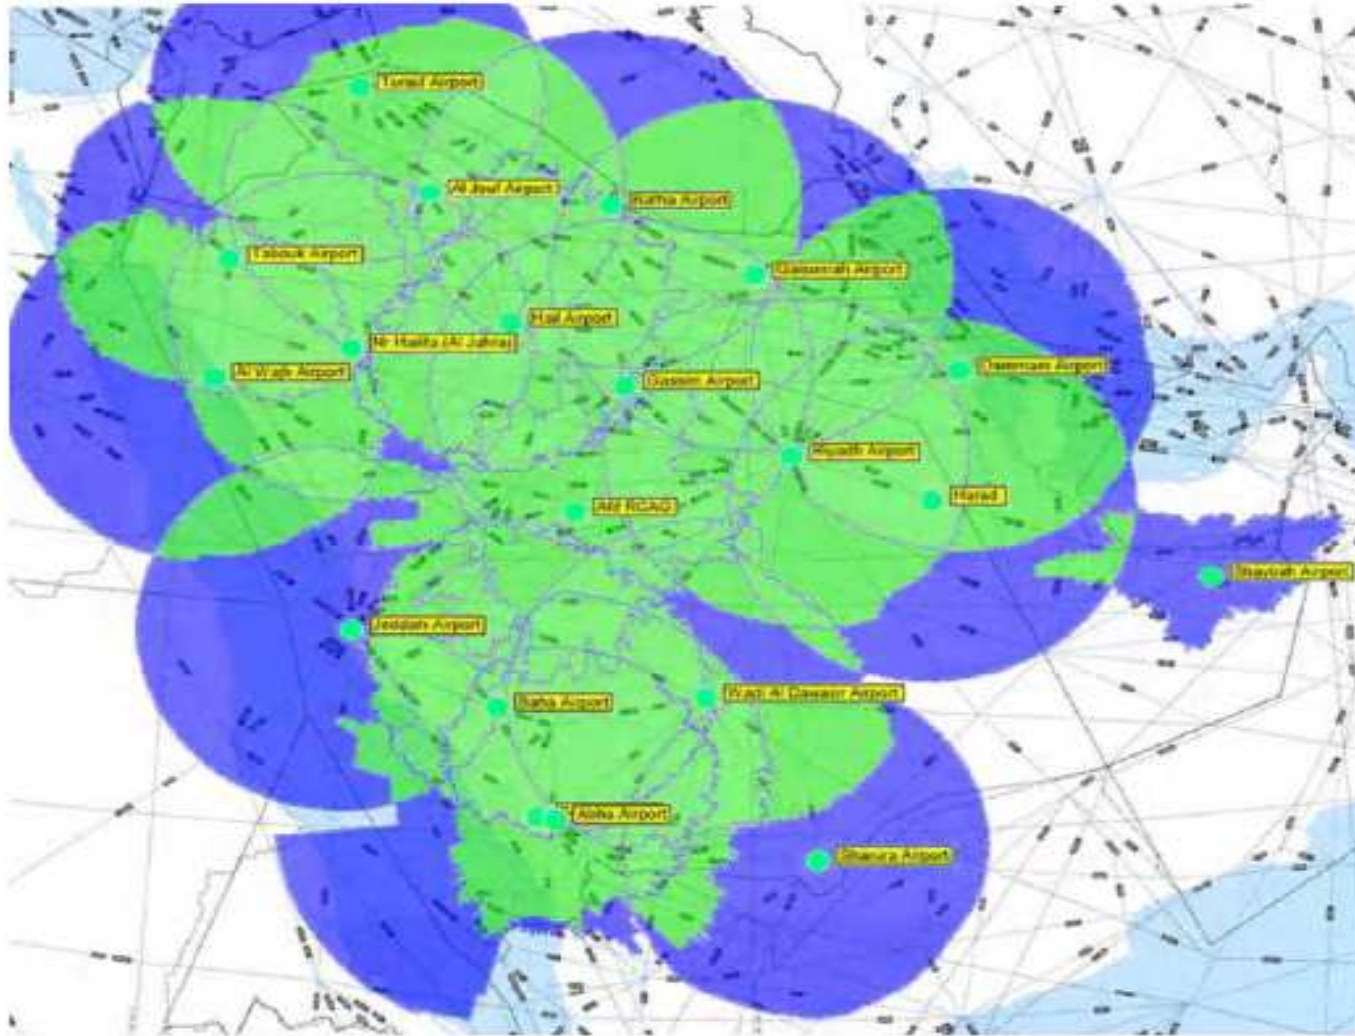



## European Mode S Radars

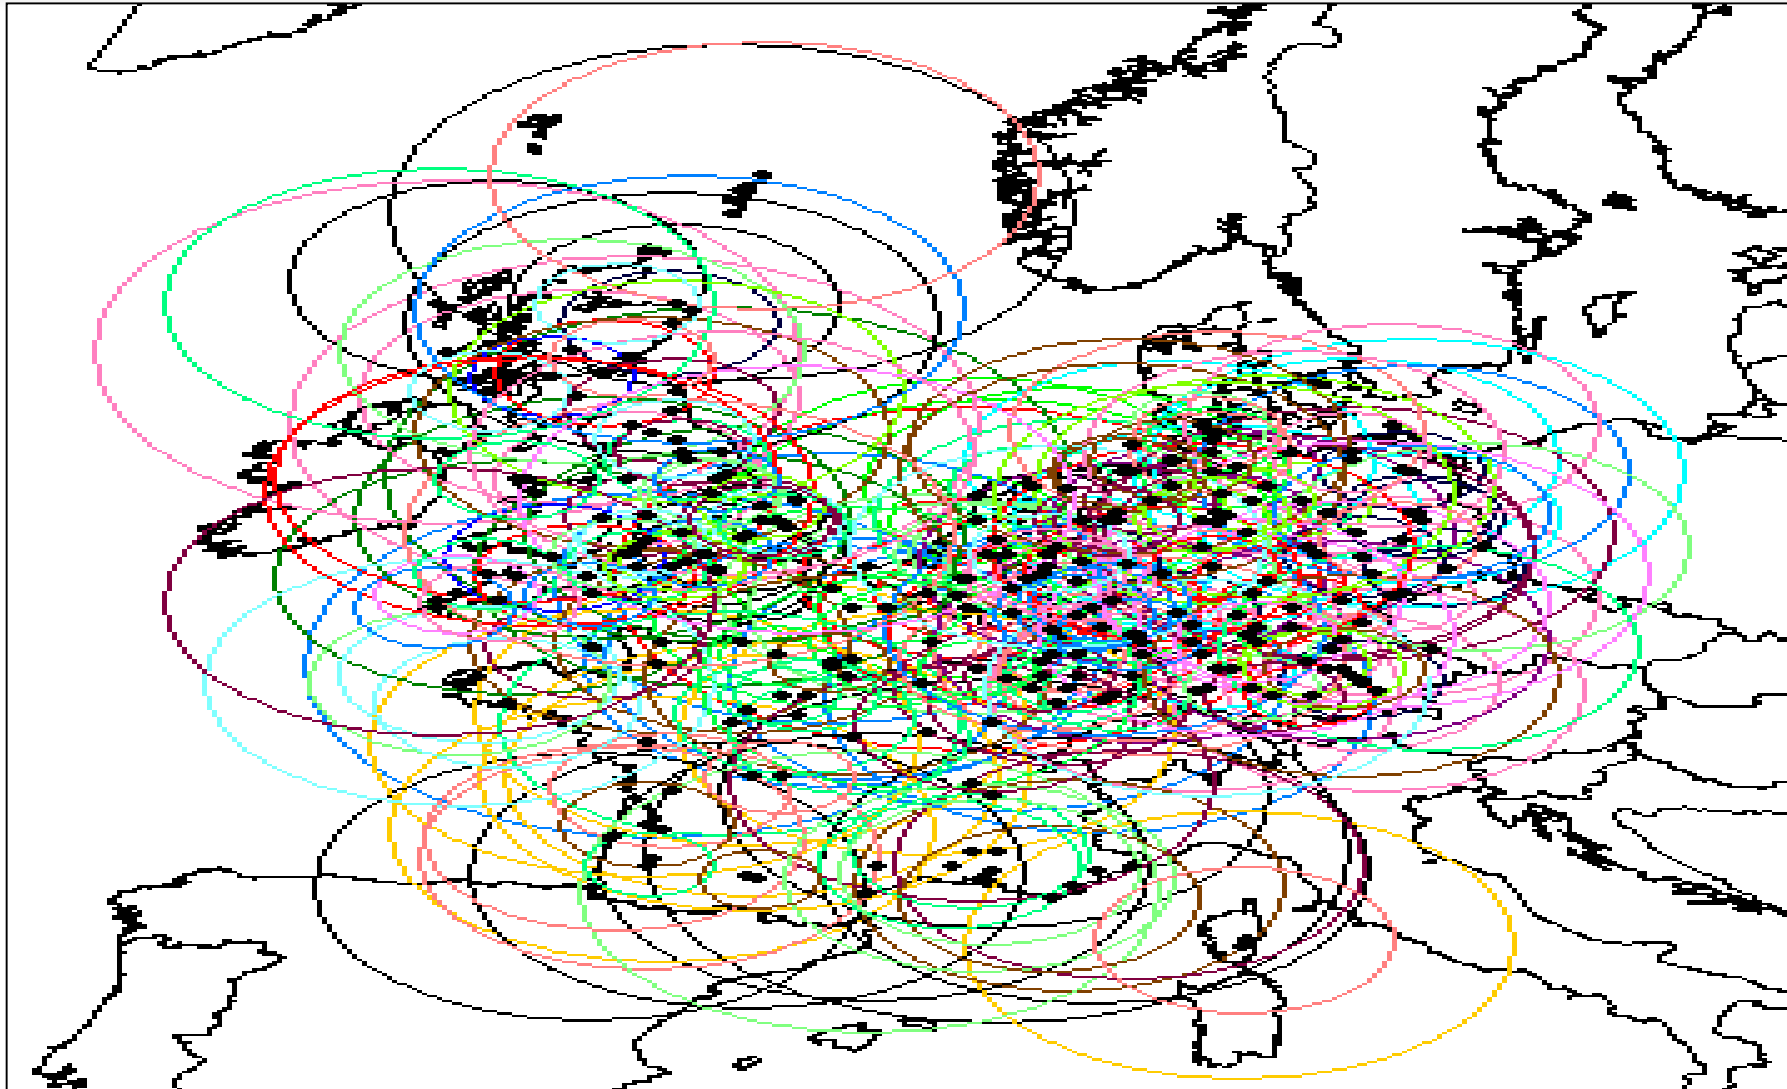





# Mode S Radar Coverage in the U.S.





## Civil/Military Coordination

- Awareness of military radars (land-based, ship borne, etc)
- It may not be possible to get details of those radars but assignment of IC should be coordinated with appropriate military authorities





ICAO

CAPACITY & EFFICIENCY



ICAO

UNITING AVIATION

## Summary

- \* Nowadays, a modern SSR comes with Mode S
- \* Mode S has **many features, not all are needed** everywhere
- \* According to Annex 10, decisions on **PRF, lockout coverage** and **use of interrogator codes must be based on regional agreements**
- \* Regional Offices may be asked by some States to assist with assigning interrogator codes. They therefore need to know the **locations of all such radars in the given geographic area**, any existing **IC used and the documented use of lockout operations** if any. Then, if only a handful of radars exist, the assignment better be done manually. If however many sites are involved, a computer tool (such as the one under development by ICAO) could be helpful.



ICAO

CAPACITY & EFFICIENCY

Appendix



ICAO

UNITING AVIATION

## Some Relevant Annex 10 Provision

**2.1.2.1.1 Recommendation.— *Administrations should coordinate with appropriate national and international authorities those implementation aspects of the SSR system which will permit its optimum use.***

***Note.— In order to permit the efficient operation of ground equipment designed to eliminate interference from unwanted aircraft transponder replies to adjacent interrogators (defruiting equipment), States may need to develop coordinated plans for the assignment of pulse recurrence frequencies (PRF) to SSR interrogators.***



ICAO

CAPACITY & EFFICIENCY



ICAO

UNITING AVIATION

## **Annex 10 Provisions ( con'td)**

**2.1.2.1.2 The assignment of interrogator identifier (II) codes, where necessary in areas of overlapping coverage, across international boundaries of flight information regions, shall be the subject of regional air navigation agreements.**

**2.1.2.1.3 The assignment of surveillance identifier (SI) codes, where necessary in areas of overlapping coverage, shall be the subject of regional air navigation agreements.**

***Note.— The SI lockout facility cannot be used unless all Mode S transponders within coverage range are equipped for this purpose.***

**2.1.3.3.1 Requirements for mandatory carriage of SSR Mode S transponders shall be on the basis of regional air navigation agreements which shall specify the airspace and the airborne implementation timescales.**



## **Annex 10 Provisions (End)**

**3.1.2.11.6 Lockout coordination. A Mode S interrogator shall not be operated using all-call lockout until coordination has been achieved with all other operating Mode S interrogators having any overlapping coverage volume in order to ensure that no interrogator can be denied the acquisition of Mode S-equipped aircraft.**

***Note.— This coordination may be via ground network or by the allocation of interrogator identifier (II) codes and will involve regional agreements where coverage overlaps international boundaries.***

### **Other documents:**


***Manual on the SSR Systems (Doc 9684)***

***Aeronautical Surveillance Manual (Doc 9924) – on ICAO-Net***



**Thank you for your Kind attention !**

**Any Question????**

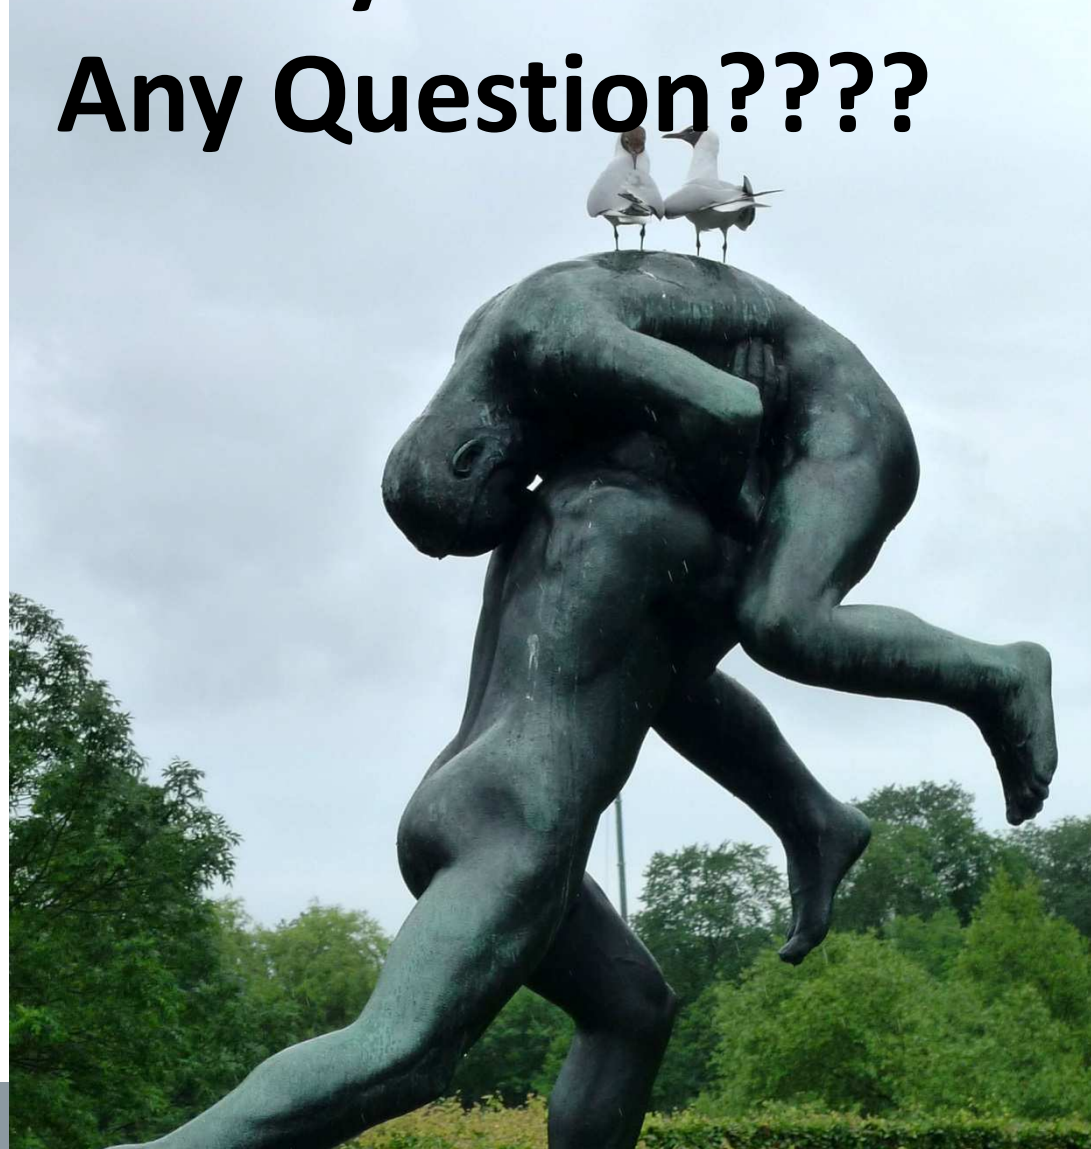

# ICAO

Uniting Aviation on

Safety | Security | Environment

