

Surveillance IC Allocation and ADS-B Implementation



Regional Officer, CNS

CNS SG/7
(Cairo, Egypt, 31May- 2June 2016)

OUTLINE

- Background
- Allocation of IC codes
 - Review Doc
 - Update Focal points
 - Use the MICA application
 - Allocation follow-up and challenges
- MSG/5 ADS-B
- MID Sur workshop
- Action by the meeting

SURVEILLANCE TECHNOLOGIES

PSR	Not standardized
SSR	Mature, SARPs in Annex 10
ADS-C	Forms part of ATN SARPs and related data link applications (FANS-1/A not done by ICAO)
ADS-B	VDL Mode 4 : SARPs in Annex 10
	UAT: SARPs part of Amendment 82 (Nov. 07)
	1090 ES: Version 0 (Amendment 77 in 02)
	1090 ES: Version 1 (Amendment 82 (Nov 07)
	Note: Data formats for both versions are included in Doc 9871
	Version 2 (being developed for 2012)
MLAT	SARPs in Annex 10 (Amendment 85, Nov. 2010)

BACK GROUND

- PSR (Primary surveillance radar) All flying object no A/C equipage
- SSR Requires A/C transponder
- SSR Mode S: answer to garbling and FRUIT (mainly in high density areas) requires Mode S transponder (needed for ACAS)
- Automatic Dependent Surveillance Contract (ADS-C)
 - A data link application needs FANS1/A or ATN (avionics and ground infrastructure)
 - Mostly for oceanic surveillance
- Automatic Dependent Surveillance Broadcast (ADS-B) (1090 ES, VDL M4 or UAT) { ADS-B Out , ADS-B In}
 - High update rate
 - Cheaper than radar
 - A/C equipage required
 - Immune to multipath
 - May need independent verification of the authenticity of the reports
- Multilateration system
 - Uses SSR replies from the A/C
 - Can be passive or active
 - High update rate
 - Needs a number of RX sites
 - Susceptible to multipath
 - Can be combined with ADS-B (can then check authenticity)

ALLOCATION OF IC CODES

- Review Doc
 - MID Region Process for Mode S Interrogator Codes Allocation (<u>App</u> A)
- Update Focal points (<u>App B</u>)
- Use the MICA application <u>https://ext.eurocontrol.int/mica/Index.action</u>

Allocation follow-up and challenges

EXAMPLES OF COORDINATION EMAIL

The Mode S Interrogator Code Allocation Cycle 24 is now started.

In this cycle are processed the IC applications for new Mode S radar planned to start Mode S transmission before the 30 March 2017.

Please find below the list of Mode S radar IC applications that are processed in the MICA Cycle 24: We are now in the allocation simulation period of the MICA Cycle 24.

The review period will start the 26 May 2016 and will finish the 23 June 2016.

If no problem is encountered during this cycle, IC allocation will be issued end of June 2016.

Would you need more information, please feel free to contact me.

Best Regards, Jérôme


- DSNA Strasbourg Mode S France EUR
- Jersey Airport LES PLATONS MSSR United Kingdom EUR
- RAF Aberporth United Kingdom EUR
- RAF Culdrose United Kingdom EUR
- RAF Deadwater United Kingdom EUR
- RAF Greymare Hill United Kingdom EUR
- RAF Portland United Kingdom EUR
- RAF St Kilda United Kingdom EUR
- RAF T92-Gapfill United Kingdom EUR
- RAF Wembury United Kingdom EUR
- skyguide GT1S Switzerland EUR
- Slovenia Control CHARLIE Slovenia EUR
- UkSATSE Dubno Ukraine EUR
- UkSATSE Skadovsk Ukraine EUR
- GCAA Air Navigation GHA United Arab Emirates MID




CAPACITY & EFFICIENCY

IC COORDINATION EMAILS


5/2/2016

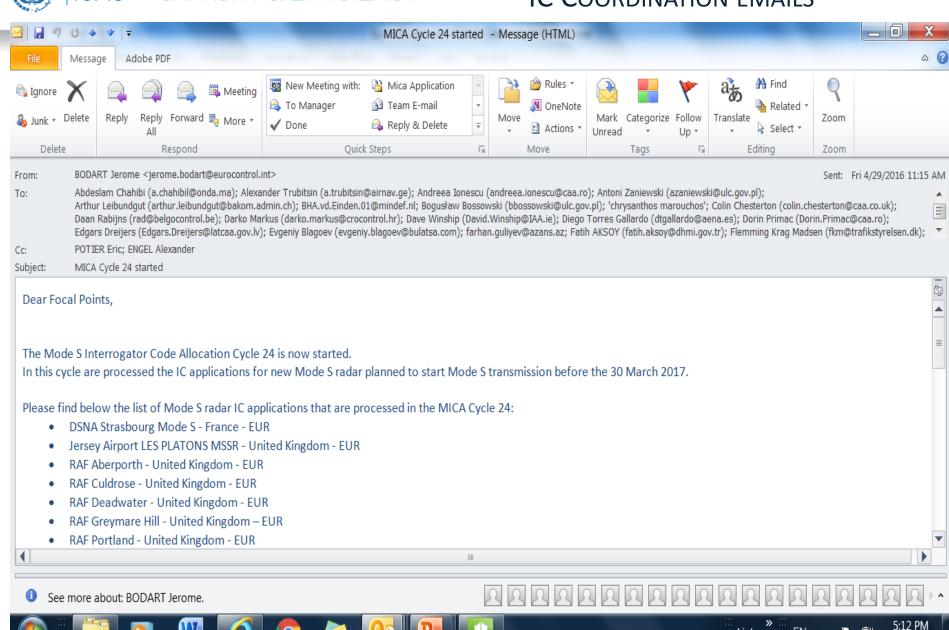

FOCAL POINT DEFINED

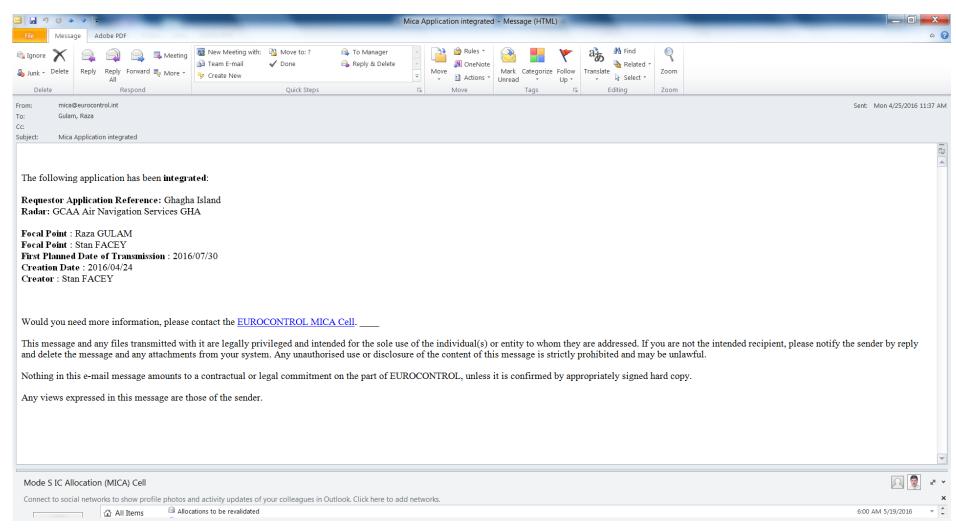

FOCAL POINT NOT DEFINED

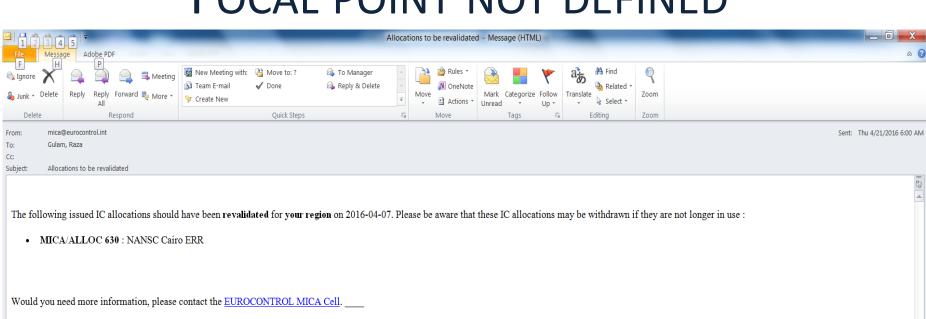

This message and any files transmitted with it are legally privileged and intended for the sole use of the individual(s) or entity to whom they are addressed. If you are not the intended recipient, please notify the sender by reply and delete the message and any attachments from your system. Any unauthorised use or disclosure of the content of this message is strictly prohibited and may be unlawful.

Nothing in this e-mail message amounts to a contractual or legal commitment on the part of EUROCONTROL, unless it is confirmed by appropriately signed hard copy.

Any views expressed in this message are those of the sender.

Mode S IC Allocation (MICA) Cell

MSG/5 OUTCOME ADS-B RELATED

ADS-B out plan and Monitoring

- Discussed ADS-B implementation and recognized the efficiencies it provides for the operations.
- ADS-B implementation included in the GANP Roadmap as an enabler technology that supports many ASBU Modules. ADS-B is/will be mandated in some ICAO Regions and even some MID States
- IATA confirmed 90% of the fleet are equipped with ADS-B out.
- Reviewed two templates (<u>App</u> C, <u>App</u> D) proposed for the ADS-B implementation monitoring. The meeting agreed that the final template to be used in the MID Region should be developed by the CNS SG, which should also develop a MID Region ADS-B Implementation Plan.

MSG DECISION 5/9: MID REGION ADS-B IMPLEMENTATION PLAN

That, the CNS SG be tasked to develop a MID Region ADS-B Implementation plan including the ADS-B monitoring Template.

MID SURVEILLANCE WORKSHOP MAY2011, JEDDAH, SAUDI ARABIA

ADS-B Out Regulatory Mandates Asia Pacific Region

- Australia (CAO 20.18, Amend Order No. 3, dated Dec. 2009)
 - Mandates ADS-B Out for upper airspace (≥FL290) in Dec 2013
 - Current Boeing production equipage meets transponder requirements
 - SA-Aware GPS receiver will be required in production 28 June 2012
 - Boeing Fleet Team Digest article published Sept 2010 providing operators a list of equipment that are SA-Aware
 - Honeywell RMA-55B Multi-Mode Receiver is <u>not</u> SA-Aware and will <u>not</u> be modified to make it SA-Aware
- Hong Kong (Airworthiness Notice 102F, Issue 2, 28 Feb 2011)
 - Implement the use of Automatic Dependent Surveillance Broadcast (ADS-B) Out:
 - After 31 Dec 2013 for aircraft flying over PBN routes L642 or M771 between FL290 and FL410
 - After 31 Dec 2014 for aircraft flying within Hong Kong FIR between FL290 and FL410
 - Must meet DO-260 (Version 0) requirements of ICAO Annex 10 and ICAO Doc 9871 Chapter 2, or DO-260A (Version 1) requirements of ICAO Doc 9871 Chapter 3
 - Means of compliance per EASA AMC 20-24 or CASA CAO 20.18 Appendix XI
 - Current Boeing production equipage meets requirements
- Singapore (CAAS AIC 14, 28 Dec. 2010)
 - Implement the use of Automatic Dependent Surveillance Broadcast (ADS-B) Out after 12 Dec 2013 within certain parts of the Singapore FIR (≥FL290)
 - Must meet EASA AMC 20-24 or CASA CAO 20.18 Appendix XI, otherwise must fly at <FL290
 - Current Boeing production equipage meets requirements
- Other Asia Pacific Regulatory Agencies
 - Expected to follow ADS-B Avionics Requirements template per APANPIRG Conclusion 21/39
 - Template states: Must meet EASA AMC 20-24 or CASA CAO 20.18 Appendix XI

MID SURVEILLANCE WORKSHOP MAY2011, JEDDAH, SAUDI ARABIA

- Nav Canada is providing reduced separation using ADS-B Out for Hudson Bay between FL350 and FL400 since Nov 2010
 - Current Boeing production equipage meets requirements
- Eurocontrol/EASA <u>draft</u> rule (SPI IR Version 3.0) mandates ADS-B Out in production in Jan 2015 and for entire European airspace (retrofit) in Dec 2017
 - Requires new transponder standard (DO-260B)
 - Current SA-On GPS equipage meets requirements
 - Need final rule <u>published</u> by Jan 2012 to allow airframers time to incorporate.

Don't want a repeat of TCAS 7.1 where production mandate of March 2012 is still in draft and is <u>not</u> published!

- USA (FAR 91.225) mandated ADS-B Out for Class A, B, C airspace and Class E airspace (≥10Kft MSL) on 1 Jan 2020
 - Requires new transponder standard (DO-260B)
 - Requires update to GPS sensor (TBD) with a minimum of SA Aware
 - Draft AC 90-ADSB requires use of a service availability prediction tool (SAPT) to determine the ability of the positioning source (GPS) to meet the position accuracy and integrity requirements for the entire flight plan.

ACTION BY THE MEETING

- The meeting is invited to:
 - Update Surveillance FP
 - Use the MICA application and do the followup
 - Develop MID Region ADS-B Implementation plan including the ADS-B monitoring Template
 - Encourage States to develop their national ADS-B plan and provide updates to ICAO





EUROPEAN ORGANISATION FOR THE SAFETY OF AIR NAVIGATION



MID Region Process for Mode S Interrogator Codes Allocation

Requirements for the coordination

DOCUMENT IDENTIFIER:

Edition Number : v 1.02

Edition Date : 07 August 2014
Status : Working Draft
Intended for : General Public

Category :

DOCUMENT CHARACTERISTICS

TITLE			
MID Region Process for Mode S Interrogator Codes Allocation requirements for the coordination			
P	ublications Reference:		
	ISBN Number:		
Document Identifier	Edition Number:	v 1.02	
	Edition Date:	07 August 2014	
Ab	stract		
Key	ywords		
Contact Person(s)	Tel	Unit	
BODART Jérôme	+32 2 729 4695	NMD/NS/SCC	
POTIER Eric	+32 2 729 4741	NMD/NS/SCC	

STATUS, AUDIENCE AND ACCESSIBILITY					
Status		Intended for		Accessible via	
Working Draft		General Public	$\overline{\checkmark}$	Intranet	
Draft		EUROCONTROL		Extranet	
Proposed Issue		Restricted		Internet (www.eurocontrol.int)	
Released Issue					

DOCUMENT APPROVAL

The following table identifies all management authorities who have successively approved the present issue of this document.

AUTHORITY	NAME AND SIGNATURE	DATE

DOCUMENT CHANGE RECORD

The following table records the complete history of the successive editions of the present document.

EDITION NUMBER	EDITION DATE	REASON FOR CHANGE	PAGES AFFECTED
1	01/02/2012	Review by CNS/ATM/IC SG/6	11,17
2	09/09/2014	Review by CNS SG/6	All

Publications

EUROCONTROL Headquarters 96 Rue de la Fusée B-1130 BRUSSELS

+32 (0)2 729 4715 Tel: Fax: +32 (0)2 729 5149
E-mail: publications@eurocontrol.int

CONTENTS

DOCUMENT CHARACTERISTICS	2
DOCUMENT APPROVAL	3
DOCUMENT CHANGE RECORD	4
CONTENTS	5
LIST OF FIGURES	8
LIST OF TABLES	9
EXECUTIVE SUMMARY	10
Introduction	11
1.3 Abbreviations	12 14
IC Allocation Coordination in Europe	16
2.1 Organization	16
3. General Requirements and Responsibilities 3.1 Focal Point Nomination 3.2 Focal Point Responsibilities 3.3 Mode S Operator Responsibilities 3.4 International Organisation Responsibilities 3.5 MICA Cell Responsibilities 3.6 IC Allocation Coordinated Area	19 19 19 20
4.1 Mode S Operator Responsibilities 4.2 Focal Point Responsibilities 4.3 MICA Cell Responsibilities	22 23
5. Mode S IC Allocation Cycle	

	5.1.1	Mode S Operator Responsibilities	. 25
	5.1.2	Focal Point Responsibilities	. 25
	5.1.3	MICA Cell Responsibilities	. 25
	5.2 Rev	iew Period	. 26
	5.2.1	Mode S Operator Responsibilities	
	5.2.2	Focal Point Responsibilities	. 26
	5.2.3	MICA Cell Responsibilities	. 27
	5.3 Pub	lication Period	. 27
	5.3.1	Mode S Operator Responsibilities	. 27
	5.3.2	Focal Point Responsibilities	. 27
	5.3.3	MICA Cell Responsibilities	. 28
	5.4 Imp	lementation Period	. 28
	5.4.1	Mode S Operator Responsibilities	. 28
	5.4.2	Focal Point Responsibilities	. 29
	5.4.3	MICA Cell Responsibilities	. 30
^	ممالم ۵	Allocation Duoces	24
6.		C Allocation Process	
		ulation Period	
	6.1.1	Mode S Operator Responsibilities	
	6.1.2	Focal Point Responsibilities	
	6.1.3	MICA Cell Responsibilities	
		iew Period	
	6.2.1	Mode S Operator Responsibilities	
	6.2.2	Focal Point Responsibilities	
	6.2.3	MICA Cell Responsibilities	
		lication Period	
	6.3.1	Mode S Operator Responsibilities	
	6.3.2	Focal Point Responsibilities	
	6.3.3	MICA Cell Responsibilities	
	-	lementation Period	
	6.4.1	Mode S Operator Responsibilities	
	6.4.2	Focal Point Responsibilities	
	6.4.3	MICA Cell Responsibilities	. 34
7.	IC Con	flict Reporting	35
•		oduction	
		Conflict Reporting Procedure	
	7.2.1	Mode S Operator Responsibilities	
	7.2.2	Focal Point Responsibilities	
	7.2.2	•	
	7.2.0		. 55
8.	Resolu	ition of IC Allocation and IC Conflict Issues	37
	8.1 IC A	llocation Issues	. 37
		conflict Issues	
		olution of Issues	
9.	Guidar	nce for IC allocation in ICAO MID Region	39

9.1 Mode S Interrogators Performances	39
9.1.1 SI code capability	39
9.1.2 II/SI code operation	39
9.1.2.1 II/SI code operation in ICAO Middle East region	39
9.1.2.2 II/SI code operation in the European Union	39
9.1.3 Mode S Coverage	40
9.2 Requirements for airborne carriage	41
9.3 MICoG working arrangement	41
ANNEX A – Discrete Code Allocation	42
A.1 II code and mobile interrogators	42
A.2 Test, Research and Development Mode S interrogators on II code 14	42
A.3 Specific Interrogator Codes for specific military operations	43
A.4 Interrogator Codes allocated to operational Mode S interrogators	
ANNEX B – II/SI code operation	45
ANNEX C – Mode S IC Allocation Cycle Flow	46
ANNEX D – Implementation Sequence Diagram	47

LIST OF FIGURES

Figure 1: Mode S IC Allocation Coordination in Europe	16
Figure 2: IC Allocation Status in European region at the end of MICA Cycle 19	18
Figure 3: IC Allocation Status in Middle East region at the end of MICA Cycle 19	18
Figure 4: Mode S IC Allocation cycle (MICA cycle)	25
Figure 5: Ad-Hoc Allocation Process Time Frame in MICA Cycle	31

LIST OF TABLES

EXECUTIVE SUMMARY

The introduction of SSR Mode S interrogators requires a coordinated approach to the allocation and implementation of the Interrogator Codes.

Provisions regarding the implementation and monitoring of Mode S IC allocations have been defined by ICAO.

In the ICAO European region, the management of the plan is exercised by EUROCONTROL on behalf of the European regional office of ICAO. EUROCONTROL has put in place a cell (the MICA Cell) to provide the centralised service of Interrogator Code (IC) allocation to Mode S Operators through their competent Focal Point. To support the coordinated allocation and implementation of the IC to Mode S interrogators in the ICAO European region, the Mode S IC allocation process has been formalized in the "EUROCONTROL Specification for the Mode S IC Allocation Coordination and IC Conflict Management" document.

Mode S interrogators are also installed in the ICAO Middle East region. The operational coverage of some of these interrogators is overlapping coverage of Mode S interrogators installed in the ICAO European region. In order to avoid any Mode S IC conflict with operational Mode S interrogator, it is therefore critical to coordinate the Mode S IC allocation in the ICAO Middle East region in close cooperation with the ICAO Middle East regional office. The Mode S IC allocation process applied in the ICAO European region will also be applied for IC allocation to Mode S interrogators in the ICAO Middle East region. This process is based on 168 days (approximately 6 months) cycles, aligned on AIRAC effective dates. The IC allocation to Mode S interrogators in the ICAO Middle East region and the ICAO European region will be processed together during the same MICA cycles.

This document defines processes applicable to the use of the centralised Mode S interrogator code allocation service in charge of coordinating interrogator code allocations within the ICAO European region and ICAO Middle-East region. It specifies the detailed procedures for Mode S Operators to obtain a coordinated Mode S interrogator code and particularly the interfaces between the Mode S Operators, the single ICAO Middle-East Regional Officer CNS acting as Focal Point for all competent States of ICAO Middle-East region, and the EUROCONTROL centralised Mode S interrogator code allocation service.

This document also specifies the procedures in place to manage interrogator code conflicts and the resolution of issues with respect to the interrogator code allocation plan.

In addition, the IC allocation in the ICAO European region relies on required Mode S interrogator performances and airborne carriage. The last part of this document introduces recommended functionalities for Mode S interrogators and transponders which could compromise future IC allocations if not implemented in that region.

1. Introduction

1.1 Purpose of the document

The purpose of this document is to lay down recommendations and requirements for an efficient support of the EUROCONTROL MICA Cell to the allocation of Mode S Interrogator Code by the ICAO Middle East regional office.

It describes the process and procedures in order to coordinate the Mode S Interrogator Code (IC) allocation for Mode S interrogators with a fixed position within the International Civil Aviation Organisation (ICAO) Middle-East (MID) region.

This document defines the procedures and the role of the following parties involved in the process:

- Mode S Operators
- ICAO MID regional office
- International Organisations
- MID Focal Point(s)
- EUROCONTROL Mode S IC Allocation Cell (hereinafter MICA Cell)

The document also describes the management and resolution of IC allocation and IC conflict issues.

1.2 Context

Whilst traditional Mode A/C Secondary Surveillance Radar (SSR) stations continuously interrogate all aircraft within their range, Mode S interrogators perform selective interrogations.

In order to avoid ambiguity in the operation of the system it is essential that each eligible Mode S interrogator is allocated an eligible Interrogator Code (IC) and is protected from interference by other Mode S interrogators operating in overlapping or contiguous airspace. The coverage areas of two Mode S interrogators using the same IC must not overlap, except if they are grouped in a cluster or if other appropriate operational mitigations are in place.

The introduction of Mode S interrogators has identified the need for a coordinated approach to the allocation and implementation of the ICs used by ground-based, airborne and shipborne platforms.

Note: systems such as ACAS or current Multilateration systems do not require the co-ordinated allocation of an IC. Even if they use Mode S interrogations and replies, they do not rely on "All Call" for acquisition or perform lockout.

Interrogator Codes can be either Interrogator Identifiers (II) or Surveillance Identifiers (SI). The design of the Mode S system limits the number of Interrogator Codes available (excluding II zero) to 15 II codes and 63 SI codes. For more information, please refer to <u>ANNEX A</u>.

Due to the limited number of ICs, it is necessary to have a centralised IC allocation system to ensure an optimised allocation and a safe operation. In the ICAO EUR region, the centralised IC allocation system is exercised by EUROCONTROL on behalf of the European regional office of ICAO. The MICA Cell has been created to provide the centralised service of IC allocation to Mode S Operators through their competent State Focal Point.

In 2011, the ICAO MID regional office requested EUROCONTROL to formally provide support for Mode S interrogator code allocation in ICAO MID region. It has been agreed that the MICA Cell will also support the ICAO MID regional office, with the same standard bi-annual MICA cycle (see Section 5) as that for Mode S interrogators within EUR region. This includes a coordinated listing of IC and coverage for Mode S interrogators in MID region. It has also been agreed that a single ICAO MID Regional Officer CNS will coordinate directly with the MICA Cell for all countries in MID region.

1.3 Abbreviations

ANSP Air Navigation Service Provider

EANPG European Air Navigation Planning Group

EMS European Mode S Station

EU European Union

EUR Europe (ICAO region)

IC Interrogator Code

ICAO International Civil Aviation Organisation

ICD Interface Control Document

II Interrogator Identifier

MICA Mode S Interrogator Code Allocation

MICoG Mode S Interrogator Code Coordination Group

MID Middle-East (ICAO region)

SGEG Surveillance Ground Environment Group

SI Surveillance Identifier

SSR Secondary Surveillance Radar

TRD Test, Research and Development

1.4 Definitions

For the purpose of this EUROCONTROL Specification, the following definitions are applicable.

Cluster: a set of Mode S interrogators connected with each other in the same network and using the same IC to share track information in order to allow aircraft acquisition already acquired by other stations in the same cluster.

Competent State:

- (a) in the case of an ANSP from an EU Member State or States having chosen to transpose the EU regulation, the State that has certified the provider in accordance with Commission Regulation (EC) No 1035/2011 repealing Regulation 2096/2005;
- (b) in other cases for an EU Member State or States having chosen to transpose the EU regulation, the State within the area of responsibility in which the Mode S Operator operates, or intends to operate, an eligible Mode S interrogator.

- (c) for States not subject to EU regulation, the State within the area of responsibility in which the Mode S Operator operates, or intends to operate, an eligible Mode S interrogator in accordance with the ICAO EUR FASID and Doc024 (European Principles And Procedures for the Allocation of Secondary Surveillance Radar Mode S Interrogator Codes (IC)).
- (d) States from ICAO MID region

Eligible Interrogator Code: any code among the II codes and the SI codes, except:

- 1. II code 0;
- 2. the interrogator code(s) reserved for military entities, including intergovernmental organisations in particular North Atlantic Treaty Organisation (NATO) management and allocation:

Eligible Mode S Interrogator: Mode S interrogator for which at least one of the following conditions is satisfied:

- 1. the interrogator relies, at least partly, on Mode S all call interrogations and replies for Mode S targets acquisition; or
- 2. the interrogator locks out acquired Mode S targets in reply to Mode S all call interrogations, permanently or intermittently, in part or totality of its coverage; or
- 3. the interrogator uses multi-site communications protocols for data link applications;

Focal Point: a person representing one or several competent States or an international organisation applying for interrogator codes, who is responsible for the coordination of all matters concerning the IC allocations between the MICA Cell and the Mode S Operators in his area of oversight.

Interrogator Code Allocation Plan: the most recently approved complete set of interrogator code allocations.

Interrogator Code Allocation Plan Proposal: a proposal for a complete set of IC allocations, submitted by the interrogator code allocation service for approval by competent States.

Interrogator Code Allocation System: means a system within the European Air Traffic Management Network, and the associated procedures, through which a centralised service of interrogator code allocation (hereinafter interrogator code allocation service), for dealing with the processing of interrogator code applications and the distribution of an interrogator code allocation plan proposal, is provided for Mode S Operators through competent States.

Interrogator Code Application (hereinafter IC application): an application from a Mode S Operator for the allocation of an eligible interrogator code.

Interrogator Code Conflict: uncoordinated coverage overlap of two or more Mode S interrogators operating on the same interrogator code, potentially resulting in aircraft remaining undetected by at least one of the Mode S interrogators.

Lockout: protocol that allows the suppression of Mode S all call replies from already acquired Mode S targets.

Lockout Coverage: Mode S interrogator configuration defining where and how to apply lockout to Mode S targets. The Lockout Coverage can be provided in different formats depending on Mode S interrogator capabilities: European Mode S Coverage Map ICD, lockout range per sector, unique lockout range.

Lockout Coverage in European Mode S Coverage Map ICD format Map (hereinafter Lockout Map): Mode S interrogator configuration file defining where and how to apply lockout to Mode S targets.

MICA Cell: the EUROCONTROL Team operating the interrogator code allocation system in accordance with its associated procedures in order to provide a centralised interrogator code allocation service.

MICA Cycle: a recurrent 6 monthly procedure for Mode S IC allocation.

MICA Cycle Effective Date: the last date of a given MICA cycle.

MICA website: the Mode S IC Allocation web-based application (hereinafter MICA website) is used to coordinate and manage the allocation of eligible IC to eligible Mode S interrogators in ICAO EUR region and ICAO MID region. The access to the web application is managed through the Eurocontrol OneSkyOnline portal. The MICA website is part of the interrogator code allocation system.

Mode S: cooperative surveillance technique for air traffic control which enables the selective interrogation of aircraft and the extraction of air derived data through which new air traffic management functionalities can be developed.

Mode S All Call interrogations: messages that are normally used by Mode S interrogators to acquire Mode S targets entering their area of coverage.

Mode S interrogator: a system composed of antenna and electronics, supporting addressing of individual aircraft through the Mode Select, known as Mode S.

Mode S Operator: a person, organisation or enterprise operating or offering to operate a Mode S interrogator, including:

- (a) Air navigation service providers;
- (b) Mode S interrogators manufacturers;
- (c) Airport operators;
- (d) Military authorities;
- (e) Research establishments;
- (f) Any other entity entitled to operate a Mode S interrogator;

Mode S target: a platform equipped with a Mode S transponder.

Third Country: a country where the Mode S IC allocation is not coordinated by the EUROCONTROL MICA Cell.

1.5 References

[RD 1] ICAO Annex 10 to the Convention on International Civil Aviation

Aeronautical Telecommunications

Volume IV Surveillance and Collision Avoidance Systems

Amendment 85 or latest

[RD 2] EUROCONTROL Specification for the Mode S IC Allocation Coordination and IC Conflict
Management
EUROCONTROLSPEC153
14th June 2013

1.6 Document structure

<u>Section 2</u> describes how the IC Allocation coordination is organized in ICAO European region. The IC Allocation status in the ICAO European region and ICAO Middle East region is also provided in this chapter.

Section 3 provides details about the actors and their role in the IC allocation process.

Section 4 details the procedure to submit an IC application in order to request an IC allocation.

<u>Section 5</u> details the Mode S IC allocation cycle (MICA cycle) which is the default procedure for processing IC applications.

<u>Section 6</u> details the Ad-Hoc allocation process which is an alternative but more constraining procedure to process IC applications.

Section 7 provides details about the IC conflict reporting procedure.

Section 8 provides details on how to resolve IC allocation and conflict issues.

<u>Section 9</u> provides some guidance for IC allocation in ICAO Middle East Region. In particular the Mode S interrogator performances are discussed.

2. IC Allocation Coordination in Europe

2.1 Organization

Provisions regarding the implementation and monitoring of Mode S IC allocations have been defined by ICAO.

In the ICAO EUR region, the management of the plan is exercised by EUROCONTROL on behalf of the European regional office of ICAO.

EUROCONTROL has put in place the MICA Cell to perform the allocation of the Interrogator Codes. In addition the Mode S Interrogator Codes Co-ordination Group (MICoG) had been created to oversee the allocation process and provide guidance to the MICA Cell. Presently, the Surveillance Ground Environment Group - Mode S Interrogator Codes Co-ordination Group (hereinafter SGEG-MICoG) performs this task. The SGEG-MICoG members are the Focal Points representing the National Regulatory Authorities of European States and those international organisations applying for IC.

The Focal Points are also responsible for the coordination of all matters concerning the IC allocations between the MICA Cell and the Mode S Operators in their area of oversight.

The Figure 1 here blow depicts the co-ordination for IC allocation to Mode S interrogators in ICAO EUR region.

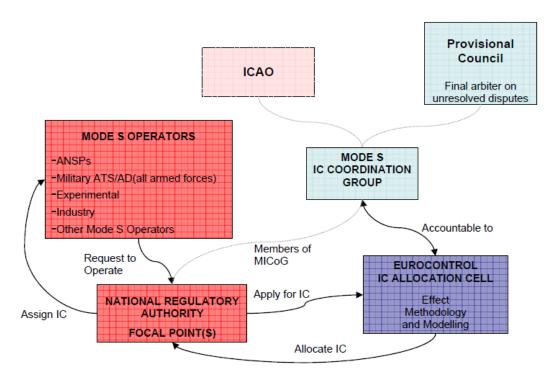


Figure 1: Mode S IC Allocation Coordination in Europe

2.2 IC Allocations Framework

IC allocation started with deployment of the first Mode S interrogators in Europe. The deployment of more Mode S interrogators required a coordinated process which was formalized in 2005:

Mode S Interrogator Codes Allocation Process 1.0

29 September 2005

From that date, the Mode S IC allocation is managed in cycle of 6 months.

To enforce the requirements and responsibilities on each participant, the following European Regulation was issued in 2009:

COMMISSION REGULATION (EC) No 262/2009 of 30 March 2009

laying down requirements for the coordinated allocation and use of Mode S interrogator codes for the single European sky

In 2013, the "EUROCONTROL Specification for the Mode S IC Allocation Coordination and IC Conflict Management" document ([RD 2]) has been issued. This EUROCONTROL specification defines processes applicable to the use of the centralised Mode S interrogator code allocation service (managed by the EUROCONTROL MICA Cell) in charge of coordinating IC allocations within the ICAO EUR region and ICAO MID region. It superseded the "Mode S Interrogator Codes Allocation Process 1.0" document identified above.

This document specifies the detailed procedures for Mode S Operators to obtain a coordinated Mode S IC and particularly the interfaces between the Mode S Operators, the Focal Points representing competent States in the ICAO EUR region, the single ICAO MID Focal Point representing all competent States of ICAO MID region and the EUROCONTROL centralised Mode S interrogator code allocation service.

This document also specifies the procedures in place to manage interrogator code conflicts and the resolution of issues with respect to the interrogator code allocation plan.

EU Member States that comply with this specification comply with a number of regulatory provisions of the European Regulation identified above.

In addition, a web application, called MICA website, has been developed to improve the processing and coordination of IC Allocation to Mode S interrogators in the European region.

2.3 IC Allocation Status

At the end of MICA Cycle 19 (June 2014), 364 Mode S interrogators were allocated an IC, either an II code or an SI code, in the ICAO EUR region.

The Figure 2 here below depicts the IC Allocation Status in the ICAO EUR region at the end of MICA Cycle 19.

Mode S interrogators are also installed in ICAO MID region. The operational coverage of some of these interrogators is overlapping coverages of Mode S interrogators installed in ICAO EUR region. In order to avoid any Mode S IC conflict with interrogator already operational in Mode S, it is therefore critical to coordinate the Mode S IC allocation in ICAO MID region in close cooperation with the ICAO MID regional office.

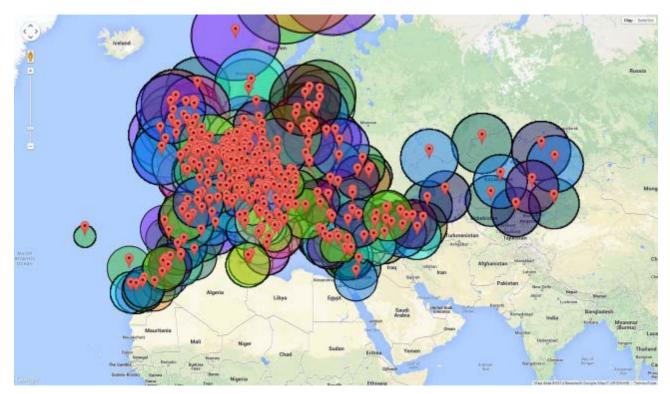


Figure 2: IC Allocation Status in European region at the end of MICA Cycle 19

At the end of MICA Cycle 19 (June 2014), 38 Mode S interrogators were allocated an II code in the Middle East region.

The Figure 3 here below depicts the IC Allocation Status in the ICAO MID region at the end of MICA Cycle 19.

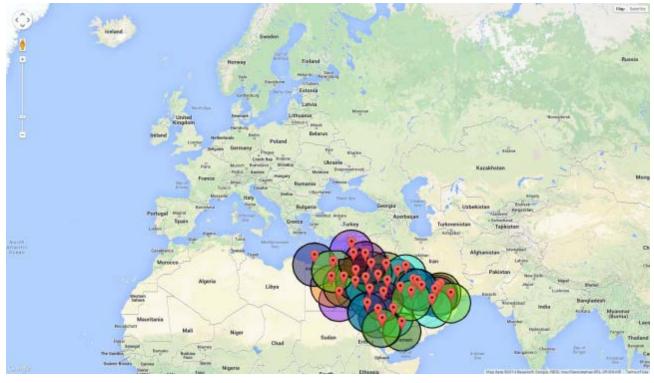


Figure 3: IC Allocation Status in Middle East region at the end of MICA Cycle 19

3. General Requirements and Responsibilities

3.1 Focal Point Nomination

The ICAO MID regional office **shall** nominate an ICAO Middle East Regional Officer CNS to act as MID Focal Point for all Mode S Operators within the ICAO Middle East region. The MID Focal Point is responsible for the coordination of all matters concerning the allocation of ICs between the MICA Cell and Mode S Operators that operate in a State of the ICAO MID region.

The ICAO MID regional office **should** nominate a backup MID Focal Point to support and to replace the MID Focal Point in order to ensure continuity of service.

Note: It is expected that the Focal Point availability is ensured during standard business hours. There is no requirement for 24 hours a day, 7 days per week (24/7) availability.

The ICAO MID regional office **should** provide known points of contact for third countries to the MICA Cell through their MID Focal Point(s).

3.2 Focal Point Responsibilities

MID Focal Point(s) **shall** be registered on the MICA website. Prior to MICA website registration, MID Focal Point(s) **shall** self-register on the EUROCONTROL OneSkyOnline portal¹.

MID Focal Point(s) **shall** inform their respective civil and military Mode S Operators of their responsibilities described in this document.

MID Focal Point(s) **shall** transmit to the MICA Cell the MICA website registration requests they have received and accepted from Mode S Operators representing either civil or military organisations under their responsibility.

MID Focal Point(s) **shall** inform the MICA Cell within 6 months of when a Mode S interrogator ceases operation in order to permit the withdrawal of the corresponding IC allocation.

MID Focal Point(s) **shall** revalidate the IC allocations under their responsibility every 5 years and confirm to the MICA Cell via e-mail whether the issued IC allocations are still in use. This revalidation is to occur every 5 years following the effective date of the issued IC allocation. The IC allocation system automatically identifies which IC allocations need to be revalidated and notifies the MID Focal Point(s) for action. An IC allocation that has not been revalidated may be withdrawn from the allocation plan if it is no longer in use (see Section 3.5).

Note: The effective date of an IC allocation is either the end date of the MICA cycle (see <u>Section 5</u>) or the end date of the Ad-Hoc allocation process (see <u>Section 6</u>). The effective date of an IC allocation is indicated on the MICA website and will be part of any exported IC allocation file from the website.

3.3 Mode S Operator Responsibilities

Mode S Operators **should** be registered on the MICA website. Prior to this registration, they **shall** self-register on the EUROCONTROL OneSkyOnline portal² and send a request to their responsible MID Focal Point(s) to enable access to the MICA website.

Edition: v 1.02 Working Draft Page 19

¹ https://extranet.eurocontrol.int/http://was.eurocontrol.int/elsh/registerNewUserForApplication.do?eurocontrolresourceid=circa

² https://extranet.eurocontrol.int/http://was.eurocontrol.int/elsh/registerNewUserForApplication.do?eurocontrolresourceid=circa

Mode S Operators **shall** only operate an eligible Mode S interrogator, using an eligible IC and coverage map if they have received an issued IC allocation, for this purpose, from their responsible MID Focal Point(s).

Mode S Operators **shall** ensure that all Mode S interrogators under their responsibility of operation are programmed with the latest issued IC allocation.

Mode S Operators **shall** report to their responsible MID Focal Point(s) (at least every six months) any update on the installation and operation of eligible Mode S interrogators:

- Any change in the installation planning shall be reported.
- Any change in the operational status of the eligible Mode S interrogators **shall** be reported.

Mode S Operators **shall** develop their IC and associated lockout coverage programming procedures, to take into account their own specific arrangements. If Mode S Operators rely on the Mode S interrogator manufacturer to program the Mode S interrogator, they **shall** ensure that the manufacturer has developed programming procedures.

As a minimum, procedures **shall** include the following verification steps, to be completed for each IC allocation programming:

- 1. Verification of the compliance of programming parameters with the IC allocation data, including:
 - Position of the radar;
 - IC;
 - Lockout range and coverage map.
- 2. Verification of the validity status of the IC allocation used for programming.
- 3. Verification of following parameters:
 - Parameters related to II/SI Code Operation;
 - Default parameters to apply when the coverage map is not correctly loaded, if any.
- 4. When operating in a cluster, verification that the relevant parameters of cluster states are compliant with the IC allocation data.
- 5. Verification that the programmed data, including following radar chain switch-over and switch-off/switch-on cycles are applied correctly.

The procedure results **shall** be recorded, dated, signed and archived for future reference.

3.4 International Organisation Responsibilities

International Organisations **shall** only operate an eligible Mode S interrogator, using an eligible IC and coverage map if they have received an issued IC allocation, for this purpose, from their responsible MID Focal Point(s).

International Organisations intending to operate, or operating, an eligible Mode S interrogator, using an eligible IC and coverage map, **shall** comply with all Mode S Operator responsibilities described in the current document.

3.5 MICA Cell Responsibilities

The MICA Cell **shall** maintain the interrogator code allocation plan.

The MICA Cell shall maintain the MICA website.

The MICA Cell **shall** inform Focal Point(s) about IC allocations that need to be revalidated (after the 5-year period).

The MICA Cell **shall** coordinate with the responsible Focal Point(s) when an IC allocation has not been revalidated. If it is determined that the IC allocation is no longer in use, it may be withdrawn from the allocation plan.

The MICA Cell **shall** develop and maintain complementary guidance material on the operation of the centralised Mode S interrogator code allocation service.

3.6 IC Allocation Coordinated Area

For the EUR region, the MICA Cell manages the Mode S IC Allocation coordination on behalf of the European regional office of ICAO.

The MICA Cell is also supporting the Middle East regional office in the coordination and allocation of Mode S ICs for the ICAO Middle East Region.

The list of countries where the Mode S IC Allocation coordination is managed or supported by the MICA Cell can be downloaded from the MICA website (MICA – List of Coordinated Countries.doc). This list provides the status at a given date and may be subject to modification.

Where a potential overlap exists between the coverage of an eligible Mode S interrogator located within the area of responsibility of a competent State whose IC allocation is carried out through the MICA Cell and the coverage of a Mode S interrogator located within the area of responsibility of a third country which is not in the list of coordinated countries, provided that the MID Focal Point(s) has communicated a point of contact for the third country to the MICA Cell, the MICA Cell **shall**:

- a. inform the third country of the safety requirements related to the allocation and use of interrogator codes;
- b. coordinate the use of ICs with that third country

4. IC Application Procedures

4.1 Mode S Operator Responsibilities

Civil or military Mode S Operators intending to operate, or operating, an eligible Mode S interrogator for which no IC has been allocated, **shall** submit an IC application to the responsible MID Focal Point, including the following key items, as a minimum:

- A unique application reference from the competent State;
- Full details of the Mode S Operator point of contact for Mode S IC allocation matters;
- Mode S interrogator name;
- Mode S interrogator use (operational or test);
- Mode S interrogator position using the World Geodetic System 1984 (WGS 84) reference (Latitude and Longitude in degree, minute, seconds format);
 - o If the Mode S interrogator position is sensitive information (e.g. military interrogators), that position may be accurate to the minute.
- Antenna centre height above ground and ground altitude above mean sea level;
- · Rotation period;
- Mode S interrogator manufacturer and model;
- Planned date of first Mode S transmission;
- Planned date of end of transmission in case of temporary allocation;
- Ad-Hoc allocation process requested;
 - The Operator shall justify why the IC application is to follow the Ad-Hoc allocation process. No justification is required if the IC application is for a TRD Mode S interrogator.
- Requested Mode S coverage;
 - o expressed as a range (in NM) per sector
- Specific operational requirements;
- SI code capability;
- "II/SI code operation" capability;
- EMS Map ICD coverage map capability.
- Mode S interrogator operating in cluster or not.
 - o second IC requested or not in case of cluster

Note: Fixed operational interrogators are normally allocated a single IC, unless they are operated in a cluster. In that case, a second IC may be allocated to the cluster for fallback modes of operation, and to test and integrate new clustered interrogators.

Mode S Operators **shall** either submit an IC application by using the MICA website or through the responsible MID Focal Point(s).

Note: An IC application form has been developed for this purpose and can be downloaded from the MICA website or from the EUROCONTROL MICA webpage.

When an IC application is submitted using the MICA website, an automatic notification e-mail is sent to inform the responsible MID Focal Point(s) and the MICA Cell.

Mode S Operators **shall** inform their MID Focal Point(s) of any changes in the installation or planning of eligible Mode S interrogators as soon as possible and at least every six months. IC applications which have not yet been processed **shall** also be updated to reflect those changes.

Note: The planned date of first Mode S transmission provided in an IC application will determine when the IC application will be processed by the MICA Cell. Therefore, once the planned date of first Mode S transmission changes and the IC application has not been processed, it is important to update this date information in the IC application.

4.2 MID Focal Point Responsibilities

MID Focal Point(s) **shall** check the validity of IC applications received from Mode S Operators, before they are submitted to the Mode S IC allocation system. The validity check shall include the key items listed in <u>Section 4.1</u>. That validity check depends on the way the IC application has been submitted by the Mode S Operator:

- If the IC application has been directly submitted on the MICA website, the MID Focal Point is informed by a notification e-mail sent by the MICA website. The MID Focal Point **shall** then use the MICA website to review and acknowledge this IC application.
 - Upon acknowledgement, an automatic notification e-mail is sent by the MICA website to inform the IC application creator, the responsible MID Focal Point(s) and the MICA Cell.
- If the MID Focal Point has received from a Mode S Operator an IC application which has
 not been submitted on the MICA website, the MID Focal Point shall review and submit this
 IC application on the MICA website.
 - Upon submission, an automatic notification e-mail is sent by the MICA website to inform the responsible MID Focal Point(s) and the MICA Cell.
- In the event of MICA website service unavailability for MID Focal Point IC Allocation submission:
 - 1. The MID Focal Point may submit the IC application by e-mail to the MICA Cell accompanied by the appropriate form which has been developed for that purpose (the IC application form can be downloaded from the MICA website or from the EUROCONTROL MICA webpage). In this case the MID Focal Point shall add full details about the MID Focal Point who is responsible for the coordination of the Mode S IC Allocation.
 - 2. Once the MICA Cell has submitted the IC application on the MICA website, the MID Focal Point **shall** review and acknowledge this IC application using the MICA website when service availability is resumed.
 - Upon acknowledgement, an automatic notification e-mail is sent by the MICA website to inform the responsible MID Focal Point(s) and the MICA Cell.

MID Focal Point(s) **shall** submit and acknowledge IC applications on the MICA website before the requirement freeze date of the MICA cycle preceding the Mode S interrogator planned date of first Mode S transmission.

Note: Key MICA cycle dates are available on the MICA website.

IC applications requesting the Ad-Hoc allocation process (see <u>Section 6</u>) **shall** be submitted and acknowledged on the MICA website by the responsible MID Focal Point before being processed. IC applications may be processed in Ad-Hoc once issued IC allocations of the current cycle are published.

MID Focal Point(s) **shall** report to the MICA Cell any change in the installation planning of eligible Mode S interrogators received from Mode S Operators. IC applications which have not yet been processed **shall** be updated to reflect those changes.

4.3 MICA Cell Responsibilities

The MICA Cell **shall** validate IC applications on the MICA website in terms of their compliance with the format and data conventions, and for completeness, accuracy and timeliness.

- If the IC application cannot be validated (e.g. errors), the MICA Cell shall contact the responsible Focal Point(s) for corrective actions.
- Validated IC applications shall be integrated into the system by the MICA Cell.
 - Upon integration, an automatic notification e-mail is sent by the MICA website to inform the IC application creator, the responsible Focal Point(s) and the MICA Cell.

If an IC application is provided by a Focal Point to the MICA Cell by e-mail:

- 1. The MICA Cell **shall** submit this IC application on the MICA website.
 - Upon submission, an automatic notification e-mail is sent by the MICA website to inform the responsible Focal Point(s) and the MICA Cell that a new IC application has been created.
- 2. Once the Focal Point has acknowledged the IC application on the MICA website, the MICA Cell **shall** integrate this IC application. The IC application is then ready to be processed.
 - Upon integration, an automatic notification e-mail is sent by the MICA website to inform the responsible Focal Point(s) and the MICA Cell.

The MICA Cell **shall** process submitted IC applications within the adequate MICA cycle on the basis of their planned date of first Mode S transmission (except for IC applications that follow the Ad-Hoc process).

5. Mode S IC Allocation Cycle

The IC allocation cycle is the standard procedure for processing IC applications and to issue corresponding IC allocations. An IC application is submitted to request an allocation for a new eligible Mode S interrogator or to request an update of an existing IC allocation.

There are only two Mode S IC allocation process cycles per year (at 168 days intervals). Each cycle is composed of 4 periods and foresees a contingency of 14 days.

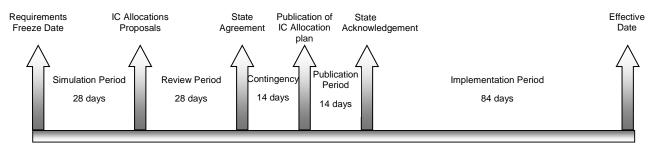


Figure 4: Mode S IC Allocation cycle (MICA cycle)

A flowchart describing the MICA cycle is provided in ANNEX C.

5.1 Simulation Period

The simulation period of the MICA cycle lasts 28 days. During this period, the MICA Cell performs interrogator code allocation plan update simulations and prepares a proposed update of the interrogator code allocation plan. This proposed update is to be approved during the subsequent review period.

5.1.1 Mode S Operator Responsibilities

This period does not apply to Mode S Operators.

5.1.2 MID Focal Point Responsibilities

This period does not apply to MID Focal Points.

5.1.3 MICA Cell Responsibilities

During the simulation period of a Mode S IC Allocation Cycle, the MICA Cell shall:

- perform interrogator code allocation plan update simulations on the basis of the pending IC applications
- prepare a proposed update of the interrogator code allocation plan for approval by the Focal Points representing the competent States that are affected by it

At the end of the 28-day simulation period, the MICA Cell **shall** create IC allocation proposals covering:

- pending IC applications for new Mode S interrogators,
- pending IC applications to modify the IC allocation of existing Mode S interrogators,

• changes to existing IC allocations impacted by the proposed interrogator code allocation plan update³.

Upon creation of the IC allocation proposals, an automatic e-mail notification is sent by the MICA website to inform all Focal Points and the MICA Cell. This notification contains the list of all IC allocation proposals that constitute the proposed interrogator code allocation plan update.

The proposed update of the interrogator code allocation plan shall be free of IC conflict.

The IC allocations proposed by MICA Cell **shall** to the greatest extent meet the following operational requirements of the IC applications:

- Mode S interrogator planned date of first Mode S transmission
- Requested Mode S coverage
- Any specific operational requirements

IC allocation proposals **shall** be available online on the MICA website where they can be accessed by all Focal Points for review.

5.2 Review Period

The review period of the MICA cycle lasts 28 days. During this period, the Focal Points review the IC allocation proposals that constitute the proposed interrogator code allocation plan update. An acknowledgement is required from the Focal Points representing competent States that are affected by the proposed interrogator code allocation plan.

5.2.1 Mode S Operator Responsibilities

Mode S operator may access the MICA website to consult the status of the IC allocations proposed for the Mode S interrogators that they operate or plan to operate.

Mode S operators shall not program IC allocation proposals in Mode S interrogators.

5.2.2 MID Focal Point Responsibilities

The proposed updated interrogator code allocation plan **shall** be subject to the approval, through their MID Focal Point(s), by all competent States that are affected by the update of the plan.

MID Focal Point(s) **should** check the suitability of the proposed IC allocations with the responsible Mode S Operators for the Mode S interrogators installed or planned to be installed in a member State of the ICAO MID region.

MID Focal Point(s) **shall** use the MICA website to accept or reject IC allocation proposals for planned or existing Mode S interrogators in a member State of the ICAO MID region before the end of the review period. Once an IC allocation proposal is accepted or rejected, its status is updated on the MICA website and an automatic e-mail notification is sent by the MICA website to inform the responsible MID Focal Point(s) and the MICA Cell.

In the event of MICA website service unavailability, the MID Focal Point **shall** contact the MICA Cell by e-mail to indicate acceptance or rejection of the proposed IC allocations.

If an IC allocation proposal is rejected by a MID Focal Point, this **shall** be duly justified.

³ It may be necessary to change existing IC allocations in order to accommodate the IC applications.

5.2.3 MICA Cell Responsibilities

If any of the proposed IC allocations are rejected within the first 14 days of the review period, the MICA Cell **shall** prepare a new proposed IC allocation plan update.

Note: If any IC allocation proposal is rejected after the initial 14 days of the review period, the MICA Cell will attempt to provide a new IC allocation proposal which is acceptable. As a measure of last resort, the MICA Cell will cancel an unacceptable IC allocation proposal and the corresponding IC application will be re-processed in the next MICA cycle.

If a Focal Point contacts the MICA Cell by e-mail to accept or reject the IC allocation proposals, the MICA Cell **shall** use the MICA website on behalf of the Focal Point to submit the acceptance or rejection of these IC allocation proposals. Once an IC allocation proposal is accepted or rejected, its status is updated on the MICA website and an automatic e-mail notification is sent by the MICA website to inform the responsible Focal Point(s) and the MICA Cell.

5.3 Publication Period

The publication period of the MICA cycle lasts 14 days. On the first day of the publication period, the MICA Cell updates the interrogator code allocation plan and communicates it to all Focal Points. All IC allocation proposals which have not been rejected are issued on the MICA website.

An automatic e-mail notification containing the list of all issued IC allocations is sent by the MICA website to inform all Focal Points and the MICA Cell. An automatic e-mail notification is also sent by the MICA website to the Mode S Operators if IC allocations are issued for the Mode S interrogators they operate.

5.3.1 Mode S Operator Responsibilities

Mode S operator may access the MICA website to consult or export the IC allocations issued for the Mode S interrogators that they operate or plan to operate.

Mode S operators shall not program issued IC allocations in Mode S interrogators during the publication period.

5.3.2 MID Focal Point Responsibilities

Within the 14 days of reception of the updated interrogator code allocation plan, MID Focal Point(s) shall:

- Communicate issued IC allocations covering pending IC applications as well as changes to
 existing IC allocations impacted by the update of the interrogator code allocation plan to the
 relevant Mode S Operators under their responsibility;
- Provide the implementation sequence to all impacted Mode S Operators;
 - Note: IC allocation programming may need to be carefully sequenced in order to avoid temporary IC conflicts.
- Acknowledge issued IC allocations under their responsibility by using the MICA website;
 - Upon acknowledgement, an automatic e-mail notification is sent by the MICA website to inform the responsible MID Focal Point(s) and the MICA Cell.

In the event of MICA website service unavailability, the MID Focal Point **shall** contact the MICA Cell by e-mail to submit the acknowledgement.

5.3.3 MICA Cell Responsibilities

On the first day of the publication period, the MICA Cell shall:

- Update and communicate to all Focal Points the interrogator code allocation plan which has been approved, without prejudice to national procedures for the communication of information on Mode S interrogators operated by military
- Provide the implementation sequence to all Focal Points

If a Focal Point contacts the MICA Cell by e-mail to acknowledge issued IC allocations, the MICA Cell **shall** acknowledge these issued IC allocations on behalf of the Focal Point on the MICA website. Upon acknowledgement, an automatic notification e-mail is sent by the MICA website to inform the responsible Focal Point(s) and the MICA Cell.

5.4 Implementation Period

The implementation period of the MICA cycle lasts 84 days. The end date of this period is also the end date of the MICA cycle and the MICA cycle effective date.

All changes to existing IC allocations issued during the Mode S IC allocation cycle must be programmed in Mode S interrogators before the end of the implementation period.

IC allocations issued for new Mode S interrogators should be programmed conforming as much as possible to the planned date of first Mode S transmission provided in the IC application.

The programming of IC allocations which are covered by the implementation sequence must be coordinated as described in the implementation sequence. An example of the implementation sequence diagram is provided in <u>ANNEX D</u>.

5.4.1 Mode S Operator Responsibilities

When programming a Mode S interrogator, Mode S Operators shall comply with:

- The allocated IC provided in the issued IC allocation;
- The surveillance and lockout coverage provided in the issued IC allocation;
- The implementation sequence document and coordinate IC Allocation programming with other Mode S Operators if necessary;

Prior to programming an issued IC allocation in a Mode S interrogator, the Mode S Operator **shall** perform the following verification steps:

- 1. verify if the issued IC allocation is identified in the implementation sequence document
 - a. If the IC allocation is not identified in the implementation sequence, then no coordination with other Mode S Operators is required.
 - The Mode S Operator may proceed to program the IC allocation in the Mode S interrogator and skip the below steps 2 and 3.
 - b. If the IC allocation is identified in the implementation sequence, then coordination with other Mode S Operators may be required.
 - Step 2 **shall** be performed.
- 2. verify the position of the issued IC allocation in the implementation sequence

- a. If the IC allocation is at the beginning of the implementation sequence, the programming of this IC allocation does not depend on any other IC allocation programming.
 - The Mode S Operator **should** proceed to program the IC allocation in the Mode S interrogator as soon as possible.
- b. If the IC allocation is not at the beginning of the implementation sequence, there is a dependency on the programming of other Mode S interrogators which precede it in the implementation sequence.
 - Step 3 shall be performed.
- 3. verify on the MICA website if all preceding IC allocations in the implementation sequence for other Modes S interrogators have been programmed
 - a. If all preceding IC allocations in the implementation sequence are confirmed on the MICA website as being implemented, the Mode S Operator **should** program the IC allocation in the Mode S interrogator as soon as possible in case of changes to existing IC allocations.
 - b. If any of the preceding IC allocations in the implementation sequence are not confirmed on the MICA website as being implemented, the Mode S Operator **shall** wait before programming the IC allocation.

Mode S Operators **shall** implement all changes to existing IC allocations before the end of the implementation period.

Once an issued IC allocation has been programmed, the responsible Mode S Operator **shall** inform his responsible MID Focal Point(s) and, if he's registered on the MICA website, **shall** confirm its implementation on the MICA website.

When the implementation of an IC allocation is confirmed on the MICA website, the status of the issued IC allocation is updated on the MICA website and an automatic notification e-mail is sent by the MICA website to inform the responsible Mode S Operator(s), the responsible MID Focal Point(s) and the MICA Cell that issued IC allocation has been programmed into the respective Mode S interrogator.

This IC allocation implementation confirmation mechanism enables the IC allocation system to provide to all registered users on the MICA website the up-to-date status of the implementation of the interrogator code allocation plan in Mode S interrogators.

Mode S Operators **shall** contact their responsible MID Focal Point(s) if they encounter problems or difficulties when implementing IC allocations.

5.4.2 MID Focal Point Responsibilities

MID Focal Point(s) **shall** ensure that all changes to existing IC allocations are programmed before the end of the implementation period.

When a MID Focal Point is informed that an IC allocation is programmed, he **shall** verify that the implementation status of that IC allocation is confirmed on the MICA website. If not, the MID Focal Point **shall** confirm the implementation. Upon confirmation of implementation, the status of the issued IC allocation is updated on the MICA website and an automatic e-mail notification is sent by the MICA website to inform the responsible Mode S Operator(s), the responsible MID Focal Point(s) and the MICA Cell.

In the event of MICA website service unavailability to confirm the implementation of an issued IC allocation, the MID Focal Point **shall** contact the MICA Cell by e-mail to confirm the implementation of the issued IC allocation.

5.4.3 MICA Cell Responsibilities

If a Focal Point contacts the MICA Cell by e-mail to confirm the implementation of an issued IC allocation, the MICA Cell **shall** confirm the implementation of the issued IC allocation on behalf of the Focal Point on the MICA website. Upon confirmation of implementation, the status of the issued IC allocation is updated on the MICA website and an automatic e-mail notification is sent by the MICA website to inform the responsible Mode S Operator(s), the responsible Focal Point(s) and the MICA Cell.

6. Ad-hoc Allocation Process

IC applications may be processed on an Ad-Hoc basis, but this process must not impact any existing Mode S IC allocations issued to other Mode S interrogators.

The Ad-Hoc process is suited for IC applications for TRD Mode S interrogators as there is no need to allocate a de-conflicted interrogator code. It is not recommended to apply this process for operational Mode S interrogator IC applications. Indeed, as no change will be made to existing issued IC allocations, the provided allocation may be far more constraining than one provided within a standard MICA cycle (see Section 5).

To avoid any impact on the proposed IC allocation plan update, Ad-Hoc IC applications are only processed after the publication of the issued IC allocations of the current MICA cycle.

The time frame of the Ad-Hoc allocation process in the MICA cycle is provided in the figure below.




Figure 5: Ad-Hoc Allocation Process Time Frame in MICA Cycle

In general, the Ad-Hoc process is a short process lasting 15 days.

6.1 Simulation Period

During the simulation period of the Ad-Hoc allocation process, the MICA Cell performs interrogator code allocation plan update simulations on the basis of the pending IC applications and prepares a proposed update of the interrogator code allocation plan for approval by the competent States that are affected by it.

As the number of Ad-Hoc IC applications to be processed is usually low and no change to the existing IC allocations is made, the IC allocation proposals are created within a few days.

6.1.1 Mode S Operator Responsibilities

This period does not apply to Mode S Operators.

6.1.2 MID Focal Point Responsibilities

This period does not apply to MID Focal Points.

6.1.3 MICA Cell Responsibilities

The responsibilities on the MICA Cell are identical to those detailed within the Mode S IC Allocation Cycle (see Section 4.1.3) with the exception of:

• The MICA Cell **shall** issue IC allocation proposals which only cover Ad-Hoc IC applications. No change will be made to existing IC allocations issued for other Mode S interrogators.

- The IC allocations proposed by MICA Cell may not meet the following operational requirements of the IC applications:
 - Mode S interrogator planned date of first Mode S transmission in case the IC application is received at short notice;
 - Requested Mode S coverage;
 - Specific operational requirements;

6.2 Review Period

Contrary to the standard MICA cycle review period of 28 days, the Ad-Hoc process review period is generally limited to 14 days. An acknowledgement is required from the Focal Points representing the competent States that are affected by the proposed interrogator code allocation plan update.

If an IC allocation proposal is rejected, the MICA Cell may prepare an updated IC allocation proposal. Nevertheless, due to the limitations inherent to the Ad-Hoc process, it may not be possible to fulfil all the requirements requested by the Mode S Operator. In such case, the unsuitable IC allocation proposal is withdrawn and the IC application will be processed in the next MICA cycle (see Section 5).

6.2.1 Mode S Operator Responsibilities

Mode S operator may access the MICA website to consult the status of the IC allocations proposed for the Mode S interrogators that they operate or plan to operate.

Mode S operators shall not program IC allocation proposals in Mode S interrogators.

6.2.2 MID Focal Point Responsibilities

The responsibilities on the MID Focal Point are identical to those detailed within the Mode S IC Allocation Cycle (see <u>Section 5.2.2</u>).

6.2.3 MICA Cell Responsibilities

The responsibilities on the MICA Cell are identical to those detailed within the Mode S IC Allocation Cycle (see Section 5.2.3) with the exception of:

 If an IC allocation proposal is rejected, the MICA Cell may prepare an updated IC allocation proposal.

6.3 Publication Period

Once the review period of the Ad-Hoc process is finalised, the MICA Cell updates the interrogator code allocation plan and communicates it to all Focal Points. All IC allocation proposals which have not been rejected are issued on the MICA website. This date of issue becomes the effective date for the IC allocations processed in Ad-Hoc.

Once IC allocations are issued, an automatic e-mail notification is sent by the MICA website to inform all Focal Points and the MICA Cell. This notification contains the list of all issued IC allocations.

No coordination with other Modes S operators is required as there is no change to the existing Mode S allocations issued for other Mode S interrogators.

6.3.1 Mode S Operator Responsibilities

Mode S operator may access the MICA website to consult or export the IC allocations issued for the Mode S interrogators that they operate or plan to operate.

Mode S operators shall not program issued IC allocations in Mode S interrogators during the publication period.

6.3.2 MID Focal Point Responsibilities

The responsibilities on the MID Focal Point are identical to those detailed within the Mode S IC Allocation Cycle (see <u>Section 5.3.2</u>) with the exception of:

- There is no time limit to communicate issued IC allocations to the relevant Mode S Operators;
- There is no implementation sequence to be provided to the Mode S Operators;

6.3.3 MICA Cell Responsibilities

The responsibilities on the MICA Cell are identical to those detailed within the Mode S IC Allocation Cycle (see Section 5.3.3) with the exception of:

• There is no implementation sequence to be provided to the Focal Points;

6.4 Implementation Period

IC allocations processed Ad-Hoc can be programmed by the Mode S Operators once they are issued by the MICA Cell.

6.4.1 Mode S Operator Responsibilities

When programming a Mode S interrogator, Mode S Operators **shall** comply with:

- The allocated IC provided in the issued IC allocation;
- The surveillance and lockout coverage provided in the issued IC allocation;

Once an issued IC allocation has been programmed, the responsible Mode S Operator **shall** inform his responsible MID Focal Point(s). If he is registered on the MICA website, he **shall** confirm its implementation on the MICA website

When the implementation of an IC allocation is confirmed on the MICA website, the status of the issued IC allocation is updated on the MICA website and an automatic e-mail notification is sent by the MICA website to inform the responsible Mode S Operator(s), the responsible MID Focal Point(s) and the MICA Cell that the issued IC allocation has been programmed into the respective Mode S interrogator.

This IC allocation implementation confirmation mechanism enables the IC allocation system to provide to all registered users on the MICA website the up-to-date status of the implementation of the interrogator code allocation plan in Mode S interrogators.

Mode S Operators **shall** contact their responsible MID Focal Point(s) if they encounter problems or difficulties when implementing IC allocations.

6.4.2 MID Focal Point Responsibilities

The responsibilities on the MID Focal Point are identical to those detailed within the Mode S IC Allocation Cycle (see <u>Section 5.4.2</u>) apart that there is no impacted IC allocation to be considered.

6.4.3 MICA Cell Responsibilities

The responsibilities on the MICA Cell are identical to those detailed within the Mode S IC Allocation Cycle (see Section 5.4.3).

7. IC Conflict Reporting

7.1 Introduction

Operating Mode S interrogators may be impacted by an IC conflict or may be the source of an IC conflict.

An IC conflict is defined as an uncoordinated overlap of lockout coverage of two or more Mode S interrogators operating on the same IC, potentially resulting in aircraft remaining undetected by at least one of the Mode S interrogators.

The Mode S IC allocation system provides a means to report an IC conflict through a reporting mechanism implemented in the MICA website.

7.2 IC Conflict Reporting Procedure

7.2.1 Mode S Operator Responsibilities

Mode S Operator **should** assess the possible impact on air traffic services of Interrogator Code conflicts, and the corresponding potential loss of Mode S target surveillance data from the impacted Mode S interrogators, taking into account their operational requirements and available redundancy.

Unless the potential loss of Mode S target surveillance data has been assessed to have no safety significance, Mode S operators **should**:

- implement monitoring means to detect interrogator code conflicts caused by other Mode S interrogators impacting eligible Mode S interrogators they operate on any operational interrogator code:
- ensure that the interrogator code conflict detection provided by the implemented monitoring means is achieved in a timely manner and within a coverage that satisfy their safety requirements;
- identify and implement as appropriate, a fallback mode of operation to mitigate the possible interrogator code conflict hazards on any operational code;
- ensure that the implemented fallback mode of operation does not create any interrogator code conflict with other Mode S interrogators referred to by the interrogator code allocation plan.

When a Mode S Operator identifies a potential IC conflict impacting a Mode S interrogator under his responsibility, he **shall**:

- Report the potential IC conflict to his representative MID Focal Point(s) and make available, through the MICA website (if he's registered), any related information for other Mode S Operators.
 - Once reported on the MICA website, the system will send an automatic e-mail notification to inform all registered users (MICA Cell, Focal Points and Mode S Operators) that a potential IC conflict has been identified.
- 2. Report the potential IC conflict accompanied with the related information to the MICA Cell if it has not been possible to report it on the MICA website.

- Investigate the conflict and coordinate bilaterally with appropriate Mode S Operators to determine the potential cause of conflict. Mode S Operators contact details are provided on the MICA Contact List which is published by the MICA Cell on the MICA website.
- 4. Advise the MICA Cell, respective MID Focal Point(s) and relevant Mode S Operators once the potential cause of the conflict has been identified.
- 5. Advise the MICA Cell, respective MID Focal Point(s) and appropriate Mode S Operators once the conflict has been resolved.

7.2.2 MID Focal Point Responsibilities

When a MID Focal Point is notified by a Mode S Operator of an IC conflict within his area of responsibility, the MID Focal Point **shall** provide the necessary assistance and advice to achieve an early resolution of the IC conflict.

If the Mode S Operator has not been able to report the conflict on the MICA website, the MID Focal Point **shall** report the IC conflict on the MICA website with any related information.

The MID Focal Point **shall** ensure that all appropriate parties that might be affected by the IC conflict are informed:

- Mode S Operator(s) who might be the cause of conflict and responsible Focal Point(s)
- Mode S Operator(s) who might be impacted by the conflict and responsible Focal Point(s)
- MICA Cell

When a MID Focal Point is notified that a conflict might originate from within his area of responsibility, he **shall** ensure that the relevant Mode S Operator(s) cooperate to identify the cause of the conflict and take the necessary actions in a timely manner.

7.2.3 MICA Cell

If a potential IC conflict accompanied with the related information has been reported to the MICA Cell but has not been reported on the MICA website, the MICA Cell **shall** report it on the MICA website accompanied with any related information provided by the Mode S Operator.

The MICA Cell **should** provide whatever assistance and advice it can to facilitate the dissemination of information and early resolution of the conflict.

8. Resolution of IC Allocation and IC Conflict Issues

8.1 IC Allocation Issues

The Mode S IC allocation process is executed in a constrained environment. Notably, to avoid overlapping coverage with other Mode S interrogators using the same IC, an IC allocation proposed by the MICA Cell may not meet the requested operational requirements of the IC application. As a result the MICA Cell allocation proposal for a Mode S interrogator may contain operational restrictions.

These operational restrictions may not be acceptable to the concerned Focal Point and the IC allocation proposal for the Mode S interrogator can be rejected.

Other proposals may lead to unacceptable operational restrictions on existing IC allocations for other Mode S interrogators. If no other acceptable IC allocation can be proposed, then no IC allocation will be issued at the end of the IC Allocation process for the Mode S interrogator. As a consequence, the update of the interrogator code allocation plan will not contain an IC allocation covering the IC application submitted for the Mode S interrogator.

If no IC allocation has been issued, the MICA Cell will perform the following actions:

- 1. Re-process the IC application in the next Mode S IC Allocation cycle.
- Investigate and propose an interim IC allocation to the responsible Focal Point(s), i.e. a
 temporary IC allocation that would be valid until a satisfactory IC allocation is issued. This
 temporary IC allocation may be on a test IC or on an operational IC with operational
 restrictions. This temporary IC allocation should permit to start the Mode S interrogator
 installation and test.
- 3. Attempt to determine IC allocation options in close collaboration with the Focal Point(s) of competent States that could participate in the identification of an acceptable proposal for all parties.

8.2 IC Conflict Issues

Operation of Mode S interrogators may be impacted by an IC conflict. This may prevent them to reliably detect incoming traffic, potentially compromising the safety of air navigation. Mode S interrogators impacted by such conflicts may need to apply the appropriate fallback mode of operation to mitigate the IC conflict.

The IC conflict resolution depends on the collaboration between Mode S Operators (see <u>Section</u> <u>7</u>). In the event of lack of collaboration, the MICA Cell will initiate mediation with the Focal Points of the competent States concerned.

8.3 Resolution of Issues

Dispute may happen during the Mode S IC Allocation process. Discussions with the impacted Mode S operator(s) and the responsible Focal Point(s) may be sufficient to find a solution.

If no solution is found, a final arbiter to unresolved dispute is required.

The MID Focal Point(s) shall manage disputes inside the ICAO Middle East region.

Final EUR	arbite region	r has and l	to be CAO N	identif VID re	fied to gion.	resolv	e di	sputes	s that	could	occur	betweer	n cou	ntries	of I	CAO

9. Guidance for IC allocation in ICAO MID Region

9.1 Mode S Interrogators Performances

9.1.1 SI code capability

It is recommended for Mode S Interrogators to support SI code capability.

Initially, for technical reasons, only Interrogator Identifier codes (II codes) 1 to 15 were defined and allocated as Interrogator Codes in the ICAO EUR region. Due to the expected number of Mode S interrogators, measures were later taken to allow the use of additional Surveillance Identifier codes (SI codes) 1 to 63.

Only SI code capable Mode S targets will be correctly detected by Mode S interrogators operating on SI code. ICAO annex 10 requires all Mode S transponders to be SI code capable however the experience shows that there are still old versions of Mode S transponders flying without the SI code capability.

9.1.2 II/SI code operation

It is recommended for Mode S Interrogators to support II/SI code operation.

Normally, the use of SI codes requires that all Mode S targets within the coverage of Mode S interrogators are equipped for this purpose. However, specifications were developed by EUROCONTROL for an II/SI code operation which enables the early use of SI codes by Mode S interrogators in an environment where not all Mode S targets are equipped for the use of SI codes.

A Mode S interrogator which operates on an SI code with II/SI code operation enabled will correctly detect both SI capable and II only capable Mode S targets.

For more information, please refer to ANNEX B.

9.1.2.1 II/SI code operation in ICAO Middle East region

Even if the current number of Mode S interrogators installed in ICAO MID region is not as high as in the ICAO EUR region, there is no guarantee that allocating only II code to Mode S interrogators in the ICAO MID region will remain possible in the future.

Without any regulation to support SI code allocation (on Mode S interrogators to support SI code and II/SI code operation), it may not be possible to keep on allocating Interrogator Code to Mode S interrogators in the future, preventing them to operate in Mode S.

9.1.2.2 II/SI code operation in the European Union

In order to facilitate and support the use of SI code in European Union, requirements on SI code and II/SI code support capabilities have been lay down in article 3 of COMMISSION REGULATION (EC) No 262/2009:

Article 3

Interoperability and performance requirements:

Mode S operators shall ensure that the radar head electronics constituent of their Mode S interrogators using an operational interrogator code:

- 1. support the use of SI codes and II codes in compliance with the International Civil Aviation Organisation provisions⁴
- 2. support the use of II/SI code operation in compliance with the requirements specified in Annex B

9.1.3 Mode S Coverage

Several formats exist to define the Mode S coverage:

- Mode S responsibility map (in European Mode S Coverage Map ICD format⁵).
 - This map format has been developed by EUROCONTROL in the frame of the POEMS contract⁶. System Maps are geodesic maps (latitude/longitude) sub-divided into horizontal cells of approx. 5NM by 5NM (latitude of Paris) and an associated vertical extent.
 - When supported by the Mode S interrogator, the coverage allocated during the Mode S IC Allocation Cycle is provided in this format.
- Sectored Range
 - The circular coverage is divided into sectors (by default 32 sectors). Surveillance and Lockout ranges are provided per sector.
 - When coverage map in EMS Map ICD format is not supported by the interrogator, then surveillance and lockout coverage allocated to the radar are provided in this format.
- Global Range for the circular coverage.
 - One unique surveillance range and one unique lockout range are provided for the circular coverage.
 - When none of the both formats above are supported, then this format is used.

Mode S Operators are encouraged to support the use of European Mode S coverage maps.

As these coverage maps are all aligned on the same common origin and have the same cell size, coverage maps can be joint without overlapping which is optimal in terms of allocation volume and RF band usage (as there may be no gap between coverage of neighbouring Mode S interrogators on the same Interrogator Code, aircraft lockout is optimized).

The second solution is less optimal as their will be gaps between allocated coverage. Nevertheless to use range per sector is better than to apply the same range to the circular coverage (Third solution).

Concerning the third solution, the maximum range without overlap of neighbouring Mode S interrogators on the same IC will be used as the circular range.

⁴ Chapter 3 'Surveillance radar systems', Section 3.1.2.5.2.1.2 'IC: Interrogator code' of ICAO Annex 10 'Aeronautical Telecommunications', Volume IV 'Surveillance Radar and Collision Avoidance Systems' (Third Edition, July 2002, incorporating Amendment 77).

⁵ European Mode S Station Coverage Map Interface Control Document, Edition 1.16

⁶ European Mode S Station Functional Specification, Edition 3.11

9.2 Requirements for airborne carriage

It is required for Mode S targets to support SI code capability.

In ICAO Annex 10 Vol. IV - §2.1.5.1.7.1: "SI code capability shall be provided in accordance with the provisions of 2.1.5.1.7 for all Mode S transponders installed on or after 1 January 2003 and by all Mode S transponders by 1 January 2005."

Airspace regulation should enforce the carriage of Mode S transponder capable to support SI capability as defined in ICAO Annex 10 Vol. IV.

Middle East ICAO office should verify and ensure the correct transponder capability in order to allow the use of SI codes in the ICAO MID region.

It is already possible to start using SI code without having 100% of the fleet SI capable. However in this case Mode S ground stations shall have the II/SI code operation capability in order to acquire aircraft which are not SI capable.

When using II/SI code operation aircrafts which are not SI cable must not be locked-out. Depending on the number of aircrafts which are not SI capable, the II/SI code operation may increase the RF pollution.

9.3 MICoG working arrangement

SGEG-MICoG working arrangement has been created to oversee the allocation process and provide guidance to the MICA Cell. SGEG-MICoG members are the Focal Points representing the National Regulatory Authorities of European States and those international organisations applying for Interrogator Codes.

As Focal Point for all countries in ICAO MID region, the ICAO MID regional officer is invited to be a SGEG-MICoG member and to attend SGEG-MICoG meetings (twice a year).

ICAO MID regional office should determine the necessity to meet Middle East Mode S Operators at regular interval to discuss about technical problems and other topics related to Mode S interrogators installation in ICAO MID region. The MICA cell would not participate to Middle East Mode S Operators meetings.

The ICAO MID regional officer could submit problems encountered in ICAO MID region during the SGEG-MICoG meeting.

ANNEX A – Discrete Code Allocation

A.1 II code and mobile interrogators

Il code 0 has been reserved by ICAO for Mode S interrogators that have not been assigned with a unique discrete Interrogator Code and are authorized to transmit (please refer to §3.1.2.5.2.1.4.2 of [RD 1] for more information).

Mode S interrogators using II code 0 in accordance with the ICAO Standards and Recommended Practices do not need to be subject to the coordinated IC allocation process.

Discrete code allocations are not issued for mobile installations for which special modes of acquisition on II code 0 are used.

SI codes matching II code 0 (SI 16, SI 32, SI 48) are not allocated.

Note: as not all Mode S aircraft are SI capable, II/SI code operation has to be programmed on stations operating both on II code and matching SI codes in order to acquire both SI capable and non SI capable aircraft. As there is no requirement to support II/SI code operation for mobile stations interrogating on II code 0, matching SI codes (SI 16, SI 32, SI 48) are currently not allocated by MICA Cell.

A.2 Test, Research and Development Mode S interrogators on II code 14

In order to save interrogator codes for operational ATC (and Air Defence...) Mode S interrogators, SGEG-MICoG decided that, when transmitting for non-essential Test, Research or Development (TRD) activities, interrogators should operate on a reserved, shared interrogator code: II 14.

Due to the mode of operation of TRD stations on II code 14 (no constraint on II/SI Code Operation programming (see ANNEX B for more information on II/SI Code Operation)), SI codes matching II 14 (SI 14, SI 30, SI 46, SI 62) are currently not allocated to operational Mode S interrogators. As a consequence, SI codes matching II 14 may currently be allocated to TRD stations.

In order to avoid unnecessary RF pollution in the 1090 MHz band, SGEG-MICoG decided that TRD sites with allocated II code 14 would need to use permanent lockout in their entire coverage, and would not be allowed to use All Call lockout override.

SGEG-MICoG is aware that this is a very restrictive mode of operation which does not guarantee detection performances when two or more TRD stations with overlap transmit concurrently. Therefore SGEG-MICoG agreed on the following:

- Should a TRD operator require guaranteed detection performances for limited trials, he can initiate a co-ordination with overlapping TRD operators to make sure that they do not transmit at the same time (informing the MICA Cell and regulators as well). The TRD operator is responsible for initiating this co-ordination. When TRD operators do not need guaranteed detection performances, they can transmit without coordinating with other TRD operators, as long as they do not conflict with critical operations announced by others through the above mechanism.
- Should a TRD operator need to operate for extended periods with guaranteed performance (for transponder monitoring for instance), then he should apply for a distinct code allocation, using the normal IC allocation request procedure. This request will be processed by the MICA Cell, with due regard to the operational requirements, as for any other IC application.

 Should a TRD operator need to test and evaluate modes of operation that are normally not allowed on code 14 (e.g. lockout override...), then he should apply for an exemption, using the normal IC allocation request procedure. This request will be processed by the MICA Cell, with due regard to the operational requirements, as for any other IC application.

An IC application has to be submitted to get an IC allocation to test systems. However, as there is no need to prevent conflict situation on II 14, applications for TRD stations are most of the time processed in Ad-Hoc.

A.3 Specific Interrogator Codes for specific military operations

II code 15 is currently reserved in ICAO EUR region for NATO management. It is not available for allocation as part of the process run by EUROCONTROL.

SI codes matching II code 15 (SI 15, SI 31, SI 47, SI 63) are reserved for military operations in ICAO EUR region (see MICoG Report Meeting #25). They are not available for allocation as part of the process run by EUROCONTROL. The management of these codes is the responsibility of NATO.

This decision only applies to non-fixed, deployable military installations.

Fixed military interrogators are still eligible to get a discrete Interrogator Code following the normal Mode S IC allocation process. In that case, they have to coordinate with the Focal Point responsible of the country where the fixed military interrogators will be installed.

A NATO Focal Point has been nominated and is member of SGEG-MICoG.

ICAO Middle East regional office has to decide how to use II code 15.

ICAO Middle East regional office has to decide how to use SI codes matching II code 15.

A.4 Interrogator Codes allocated to operational Mode S interrogators

All other ICs, i.e. those IC which have not been detailed previously in this Annex, are available for allocation to operational eligible Mode S interrogators:


- II code 01 and matching SI codes (SI 01, SI 17, SI 33, SI 49)
- II code 02 and matching SI codes (SI 02, SI 18, SI 34, SI 50)
- II code 03 and matching SI codes (SI 03, SI 19, SI 35, SI 51)
- II code 04 and matching SI codes (SI 04, SI 20, SI 36, SI 52)
- II code 05 and matching SI codes (SI 05, SI 21, SI 37, SI 53)
- II code 06 and matching SI codes (SI 06, SI 22, SI 38, SI 54)
- II code 07 and matching SI codes (SI 07, SI 23, SI 39, SI 55)
- II code 08 and matching SI codes (SI 08, SI 24, SI 40, SI 56)
- II code 09 and matching SI codes (SI 09, SI 25, SI 41, SI 57)
- II code 10 and matching SI codes (SI 10, SI 26, SI 42, SI 58)
- II code 11 and matching SI codes (SI 11, SI 27, SI 43, SI 59)

- II code 12 and matching SI codes (SI 12, SI 28, SI 44, SI 60)
- II code 13 and matching SI codes (SI 13, SI 29, SI 45, SI 61)


ANNEX B – II/SI code operation

- 1. Mode S interrogators, when operating with an SI code and if enabled by an appropriate operational parameter, shall also acquire targets through all call replies which are encoded using the matching II code.
- Mode S interrogators, when operating with an SI code and if enabled by an appropriate
 operational parameter, shall consider transponders replying with all call replies encoded using
 the matching II code as non-SI equipped transponders, irrespectively of the SI capability
 reported in the data link capability report.
- 3. Mode S interrogators, when operating with an SI code and if enabled by an appropriate operational parameter, shall interrogate transponders lacking SI code capability using the Mode S multisite lockout protocol messages foreseen for II code operation. The II code to be used shall be the matching II code.
- 4. Mode S interrogators, when operating with an SI code and if enabled by an appropriate operational parameter, shall be configurable by the operator to either:
 - o not use lockout on the matching II code for transponders lacking SI code capability, or
 - use intermittent lockout on the matching II code for transponders lacking SI code capability.
- 5. Mode S interrogators, when operating with an II code and if enabled by an appropriate operational parameter, shall be configurable by the operator to either:
 - not use lockout for transponders which report no SI capability in their data link capability report or cannot report their data link capability, or
 - o use intermittent lockout for transponders which report no SI capability in their data link capability report or cannot report their data link capability.
- 6. When the II/SI code operation is activated, the lockout maps shall not be taken into account for transponders lacking SI code capability.

ANNEX C – Mode S IC Allocation Cycle Flow

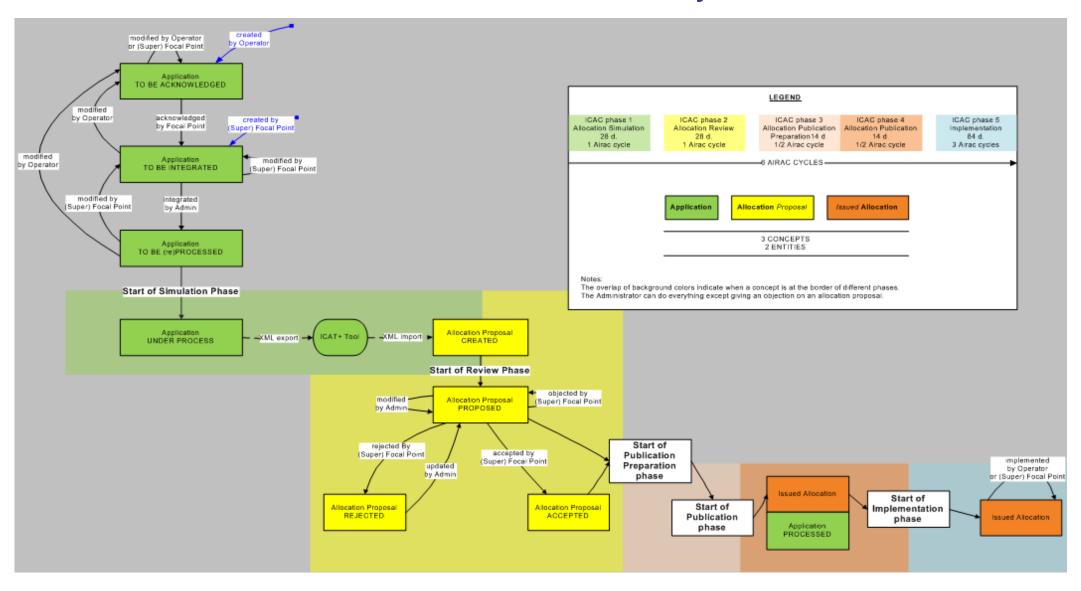

ANNEX D – Implementation Sequence Diagram

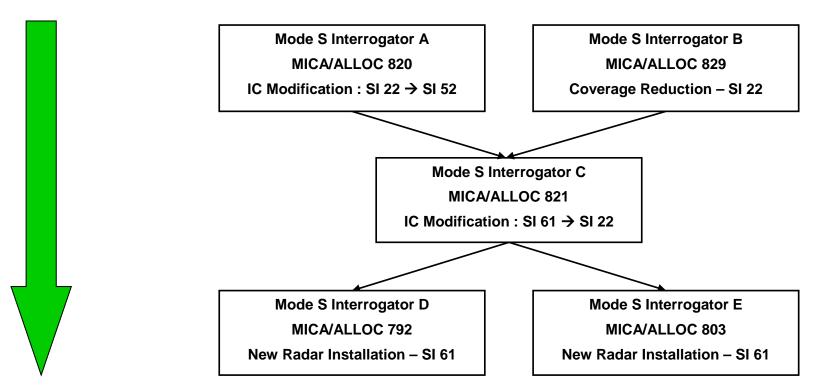

In the Implementation Sequence Diagram provided above, the sequence of Mode S radar programming is the following:

1. The IC programmed in Mode S Interrogator A has to be changed from SI 22 to SI 52 conforming to MICA/ALLOC 820.

The coverage programmed in Mode S Interrogator B on SI 22 has to be modified conforming to MICA/ALLOC 829.

As these 2 IC allocations are at the beginning of the implementation sequence diagram, the programming of these IC allocations does not depend on the programming of any IC allocation.

Page 47

MICA/ALLOC 820 and MICA/ALLOC 829 must be programmed before the end of the Implementation Period of MICA Cycle.

- 2. As MICA/ALLOC 821 is not at the beginning of the implementation sequence, the programming of this IC allocation depends on the programming of the IC allocations which precede it in the implementation sequence: MICA/ALLOC 820 and MICA/ALLOC 829.
 - Once step 1 above is done, the IC programmed in **Mode S Interrogator C** has to be changed from SI 61 to SI 22 conforming to MICA/ALLOC 821.
 - MICA/ALLOC 821 must be programmed before the end of the Implementation Period of MICA Cycle.
- 3. As MICA/ALLOC 792 and MICA/ALLOC 803 are not at the beginning of the implementation sequence, the programming of these IC allocations depends on the programming of the IC allocation which precedes them in the implementation sequence: MICA/ALLOC 821.
 - Once step 2 above is done, **Mode S Interrogator D** can be programmed on SI 61 conforming to MICA/ALLOC 792 and **Mode S Interrogator E** can be programmed on SI 61 conforming to MICA/ALLOC 803.

- END -

APPENDIX 5.2.2H

MODE S INTERROGATOR CODE (IC) ALLOCATIONS (MICA App) & Surveillance FOCAL POINTS

State	Name	Tel./Fax	Mobile	Email
State	Name	Tel./Fax	Wiobile	Eman
Bahrain	Ahmed Ali El Sayed	+973 17321034	+973 36663693	ahmed.alsayed@caa.gov.bh
		+973 17329977		
Egypt	Abdel Maboud Mohamed Ahmed	+20-100 6571904	+20100 6571904	ang_aca_abd@yahoo.com
Iran	Seyed Mahmood Qazi Mirsaeed	+982144544031	+989122443706	mirsaeed@airport.ir
	Arash Khodaei	+982166073534		a-khodaei@cao.ir
Iraq	Ali Mohsin Hashim		+9647815762525	Atc_iraqcaa@yahoo.com
Jordan				
Kuwait	Anas Alkhulaifi	+965 161 Ext 2205	+965 66072288	aa.Alkhulaifi@dgca.gov.kw
Kuwan	Fahad S. Albaloushi			
		0.51.1.520100		fs.albaloushi@dgca.gov.kw
Lebanon	Amin Jaber.	+961 1 628199 +961 1 629021		Jabera@beirutairport.gov.lb
		+901 1 029021		
Libya				
Oman	Saleh Abdullah Al-Harthy	+968-24 519 880	+968 9520 5073	saleh@paca.gov.om
Olliali	Saleli Abdullali Al-Haltily	+968-24 519 789		salen@paca.gov.om
Qatar	Mohammed Al Nuaimmi	+974 44656515	+974 44656515	Moh.alnuaimi@caa.gov.qa
Quius		. , , , , , , , , , , , , , , , , , , ,		Transmum e camga (14
Saudi Arabia	Saad AlZahrani	+96626717717		sdbd9@hotmail.com
	Jamal A. Fageh			jfageh@gaca.gov.sa
Sudan	Ahmed Alamin Omer	+249 123288078	+249 123288078	ahmedomer262@gmail
Syria				
•	A1 1 A1 OL .' 11'	.071.2.4054256	.071 50 0100407	
UAE	Ahmed Al Obaidli Stanley James Facey	+971 2 4054356 +971 2 4054406	+971 50 8189407 + 97156 6113023	sfacy@gcaa.gov.ae aobaidli@gcaa.gov.ae
	Stainey James Facey	+971 2 4054410	T 7/130 0113023	aooaidii e gcaa.gov.ae
***		1 7/12 1034410		
Yemen				

ADS-B IMPLEMENTATION STATUS IN THE APAC REGION

State/ Administration	ADS-B Ground Infrastructure and ATC System readiness or Implementation plan	Date of issue/effectiveness date of equipage mandate	Mandated Airspace and/or ATS-routes	Intended separation criteria to be applied	Remarks
AFGHANISTAN					
AUSTRALIA					

State/ Administration	ADS-B Ground Infrastructure and ATC System readiness or Implementation plan	Date of issue/effectiveness date of equipage mandate	Mandated Airspace and/or ATS-routes	Intended separation criteria to be applied	Remarks
BANGLADESH					
CAMBODIA					
CHINA					

State/ Administration	ADS-B Ground Infrastructure and ATC System readiness or Implementation plan	Date of issue/effectiveness date of equipage mandate	Mandated Airspace and/or ATS-routes	Intended separation criteria to be applied	Remarks
HONG KONG CHINA					

APPENDIX D

ADS-B OUT implementation

State	Mandate	Ground Station	Flight Level	ATC	Data sharing	Data sharing
Bahrain		Capabilities	-	Procedure	Protocol	States
Egypt						
Iran						
Iraq						
Jordan						
Kuwait	April 2016	ADS-B GS Accept DO260,DO260A,DO260B	Will Be Implemented by April 2016	Will be Published by April 2016	ASTERIX (Cat 21 Ver 0.26)	N/A
Lebanon						
Libya						
Oman						
Qatar						
Saudi Arabia						
Sudan						
Syria						
UAE						
Yemen						
